
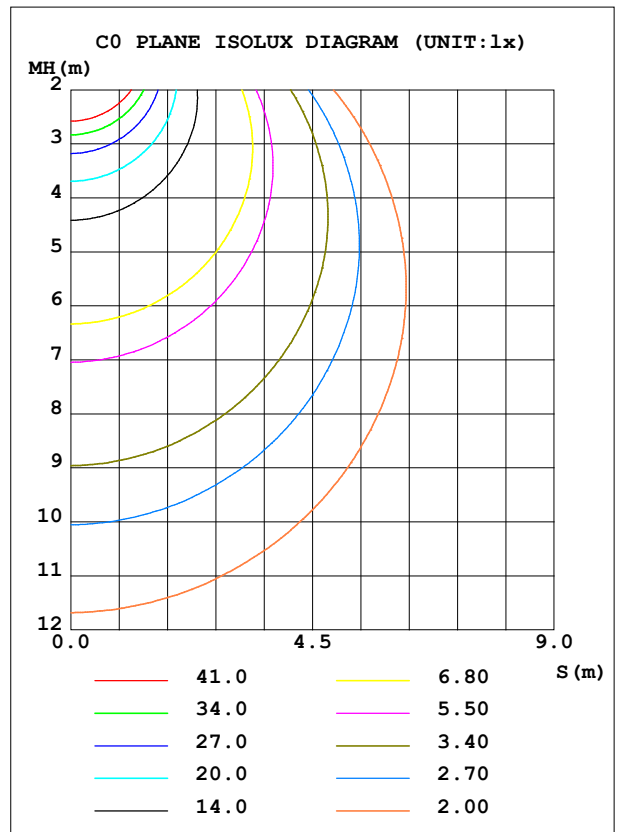


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	273.0	S/MH (C0/180)	1.38
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.37
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1050.2	η UP, DN (C0-180)	0.0, 50.0
NOMINAL FLUX (lm)	1050.21	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.55

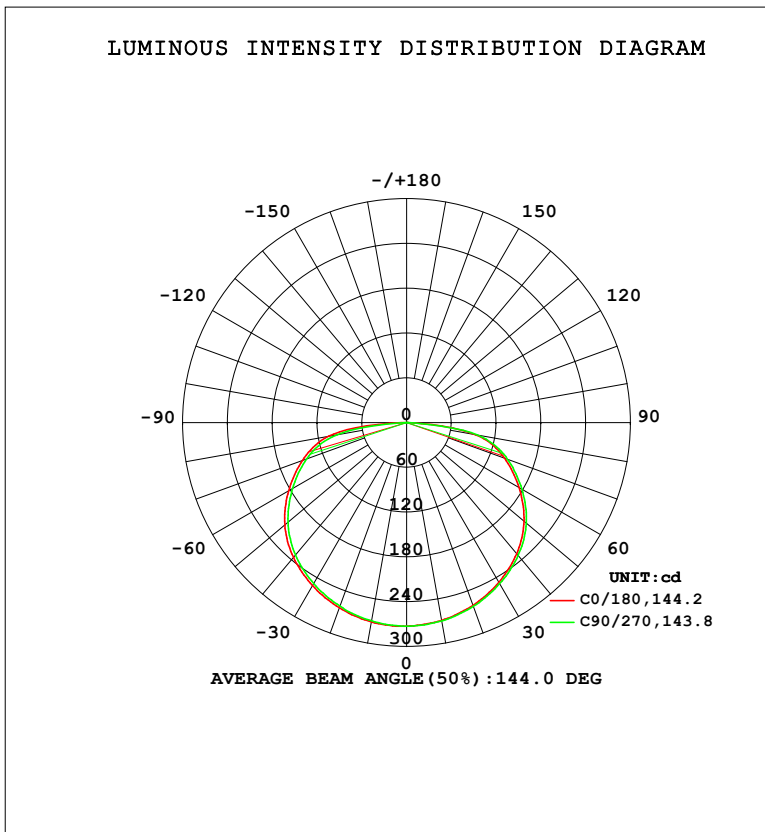

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	269.1	269.7	270.0	270.6	271.2	270.6	269.8	269.6	0- 10	25.91	25.91	2.47,2.47
20	260.5	261.6	261.9	263.2	264.0	262.9	261.7	261.0	10- 20	75.43	101.3	9.65,9.65
30	247.2	248.8	249.4	250.8	252.3	250.7	249.0	248.2	20- 30	118.4	219.8	20.9,20.9
40	229.4	231.4	232.5	233.9	235.8	233.6	231.6	230.9	30- 40	151.4	371.2	35.3,35.3
50	205.4	207.7	209.4	211.1	213.1	209.8	207.5	206.4	40- 50	171.1	542.3	51.6,51.6
60	174.0	176.6	178.3	180.4	182.5	179.0	176.3	174.9	50- 60	173.5	715.8	68.2,68.2
70	139.6	142.3	144.1	146.6	148.7	145.3	142.6	140.8	60- 70	159.5	875.3	83.3,83.3
80	93.82	92.82	96.13	102.7	106.0	96.99	94.80	97.16	70- 80	130.3	1006	95.8,95.8
90	0.9827	0.8401	0.8530	1.046	0.6079	0.5049	0.5248	0.6303	80- 90	44.57	1050	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

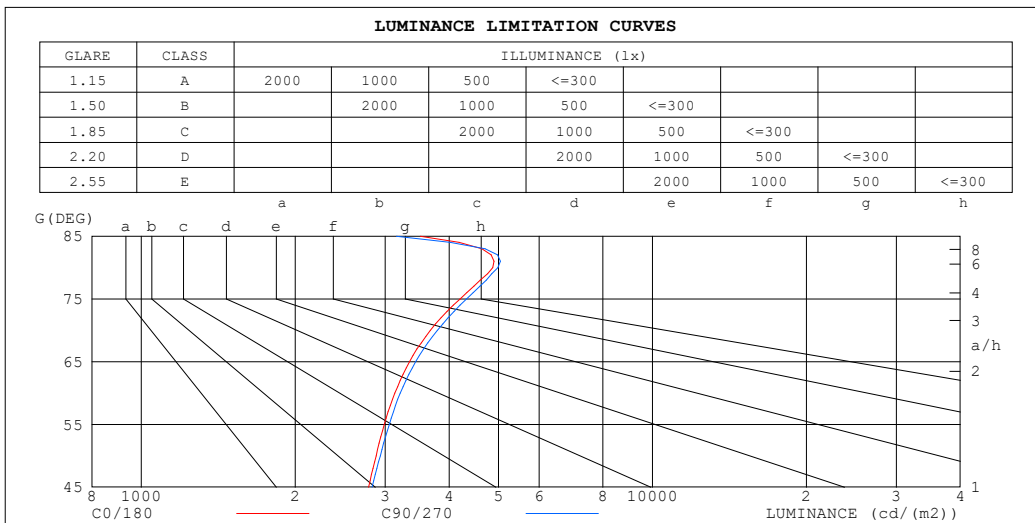

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3517	3155
80	4867	4985
75	4202	4329
70	3677	3795
65	3346	3440
60	3134	3212
55	2985	3055
50	2879	2934
45	2781	2826


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.01	.95	.91	.98	.94	.89	.94	.90	.86	.90	.87	.84	.86	.84	.81	.79
2.0	.86	.78	.71	.84	.76	.70	.80	.74	.69	.77	.71	.67	.74	.69	.65	.63
3.0	.74	.65	.57	.72	.64	.57	.69	.62	.56	.66	.60	.55	.64	.58	.54	.51
4.0	.65	.55	.48	.63	.54	.47	.61	.53	.46	.58	.51	.46	.56	.50	.45	.43
5.0	.57	.48	.40	.56	.47	.40	.54	.46	.39	.52	.45	.39	.50	.44	.39	.36
6.0	.51	.42	.35	.50	.41	.34	.48	.40	.34	.47	.39	.34	.45	.38	.33	.31
7.0	.46	.37	.30	.45	.36	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.27
8.0	.42	.33	.27	.41	.33	.27	.40	.32	.26	.39	.31	.26	.37	.31	.26	.24
9.0	.38	.30	.24	.38	.29	.24	.37	.29	.24	.35	.28	.23	.34	.28	.23	.21
10.0	.35	.27	.21	.35	.27	.21	.34	.26	.21	.33	.26	.21	.32	.26	.21	.19

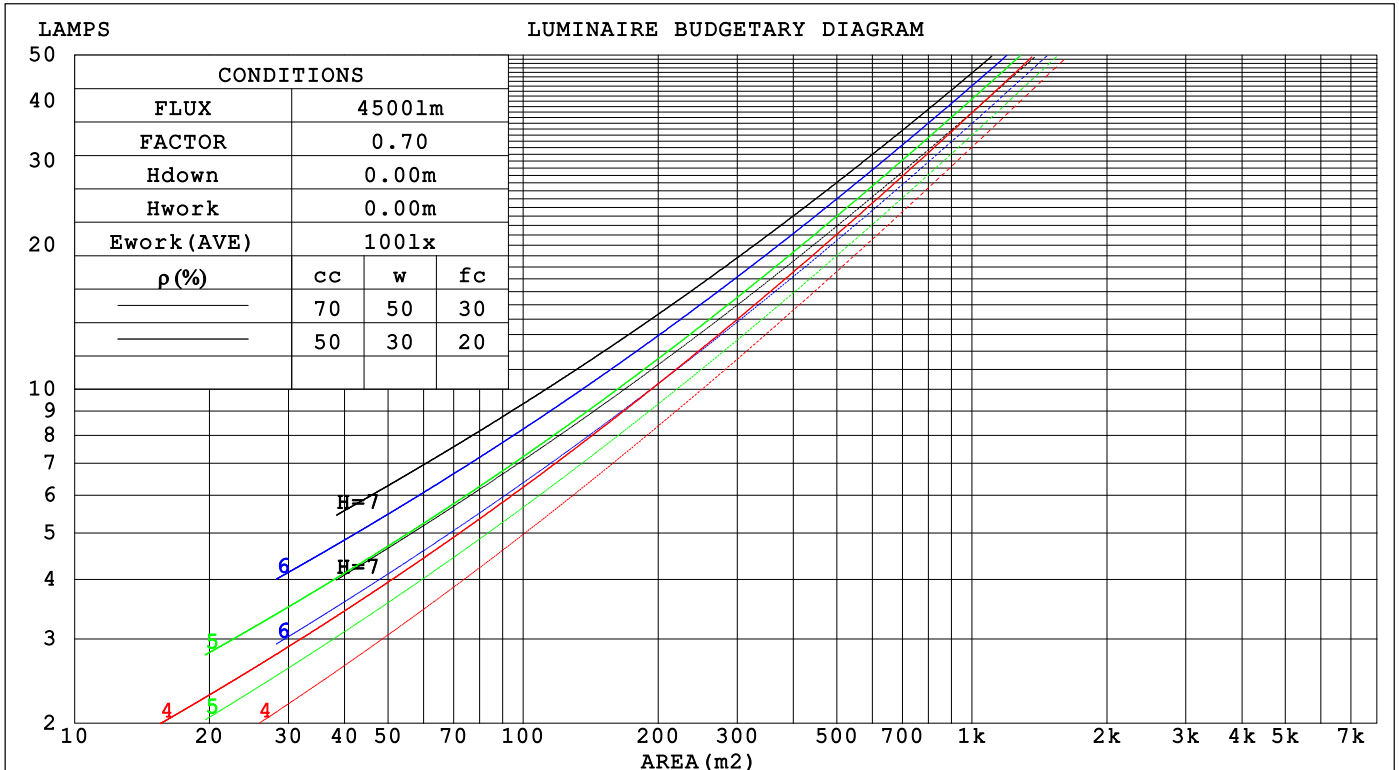

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.372	.211	.067	.364	.208	.066	.351	.201	.064	.338	.195	.063	.327	.189	.061	
2.0	.337	.185	.057	.330	.182	.056	.318	.177	.055	.307	.172	.054	.297	.168	.053	
3.0	.304	.162	.048	.298	.160	.048	.288	.156	.047	.278	.152	.047	.268	.149	.046	
4.0	.275	.143	.042	.270	.142	.042	.261	.138	.041	.252	.135	.041	.244	.132	.040	
5.0	.251	.128	.037	.247	.127	.037	.238	.124	.036	.230	.121	.036	.223	.119	.036	
6.0	.230	.115	.033	.226	.114	.033	.219	.112	.033	.212	.110	.032	.205	.108	.032	
7.0	.212	.105	.030	.209	.104	.030	.202	.102	.029	.196	.100	.029	.190	.099	.029	
8.0	.197	.096	.027	.194	.095	.027	.188	.094	.027	.182	.092	.027	.177	.091	.026	
9.0	.184	.089	.025	.181	.088	.025	.175	.087	.025	.170	.085	.024	.165	.084	.024	
10.0	.172	.082	.023	.169	.082	.023	.164	.081	.023	.160	.079	.023	.155	.078	.022	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.185	.156	.129	.158	.134	.111	.108	.092	.077	.062	.053	.045	.020	.017	.014	
2.0	.178	.132	.093	.153	.113	.080	.105	.078	.056	.060	.046	.033	.019	.015	.011	
3.0	.171	.115	.069	.147	.099	.060	.101	.069	.042	.058	.040	.025	.019	.013	.008	
4.0	.163	.102	.054	.140	.088	.047	.096	.061	.033	.056	.036	.020	.018	.012	.006	
5.0	.156	.091	.044	.134	.079	.038	.092	.055	.027	.053	.032	.016	.017	.011	.005	
6.0	.148	.083	.037	.127	.072	.032	.088	.050	.023	.051	.030	.013	.016	.010	.004	
7.0	.141	.076	.031	.121	.066	.027	.084	.046	.019	.049	.027	.012	.016	.009	.004	
8.0	.134	.071	.027	.115	.061	.024	.080	.043	.017	.046	.025	.010	.015	.008	.003	
9.0	.127	.066	.024	.109	.057	.021	.076	.040	.015	.044	.024	.009	.014	.008	.003	
10.0	.121	.061	.022	.104	.053	.019	.072	.037	.013	.042	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm										
NAME: DS-LED-6-S15W-5CCTWH					TYPE:			WEIGHT:		
SPEC.: 4000K 90					DIM.:			SERIAL No.:		
MFR.: Light by Lotus					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	18.3	17.0	18.6	18.8	16.8	18.4	17.1	18.7	18.9
3H	19.0	20.5	19.3	20.8	21.0	19.1	20.7	19.4	20.9	21.2
4H	20.2	21.7	20.5	21.9	22.2	20.4	21.8	20.7	22.1	22.4
6H	21.4	22.8	21.7	23.0	23.3	21.5	22.9	21.9	23.2	23.5
8H	21.8	23.2	22.2	23.4	23.7	22.0	23.3	22.3	23.6	23.9
12H	22.0	23.3	22.4	23.6	23.9	22.1	23.5	22.5	23.8	24.1
4H 2H	17.5	19.0	17.9	19.3	19.5	17.6	19.1	17.9	19.4	19.6
3H	20.1	21.4	20.4	21.7	22.0	20.2	21.5	20.5	21.8	22.1
4H	21.4	22.6	21.8	23.0	23.3	21.6	22.8	21.9	23.1	23.4
6H	22.7	23.8	23.2	24.2	24.6	22.9	24.0	23.3	24.3	24.7
8H	23.3	24.3	23.7	24.6	25.0	23.4	24.4	23.8	24.8	25.2
12H	23.5	24.4	23.9	24.8	25.2	23.6	24.6	24.1	24.9	25.4
8H 4H	22.0	23.0	22.4	23.4	23.8	22.1	23.1	22.5	23.5	23.9
6H	23.5	24.4	24.0	24.8	25.2	23.6	24.5	24.1	24.9	25.3
8H	24.1	24.9	24.6	25.3	25.8	24.3	25.0	24.7	25.5	25.9
12H	24.4	25.1	24.9	25.6	26.0	24.5	25.2	25.0	25.7	26.1
12H 4H	22.1	23.0	22.5	23.4	23.8	22.2	23.1	22.6	23.5	23.9
6H	23.7	24.4	24.1	24.9	25.3	23.8	24.6	24.3	25.0	25.4
8H	24.3	25.0	24.8	25.5	25.9	24.5	25.1	24.9	25.6	26.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1050 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	53	40	33	52	40	33	51	39	32	25
0.80	62	49	41	61	49	41	59	48	41	33
1.00	70	58	50	69	57	50	67	59	49	41
1.25	78	66	58	76	65	57	73	63	56	48
1.50	83	72	63	81	71	63	78	69	62	53
2.00	90	80	73	88	79	72	85	77	71	62
2.50	95	86	79	93	84	78	89	82	76	67
3.00	99	91	84	96	89	83	92	86	81	71
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	100	96	104	98	94	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

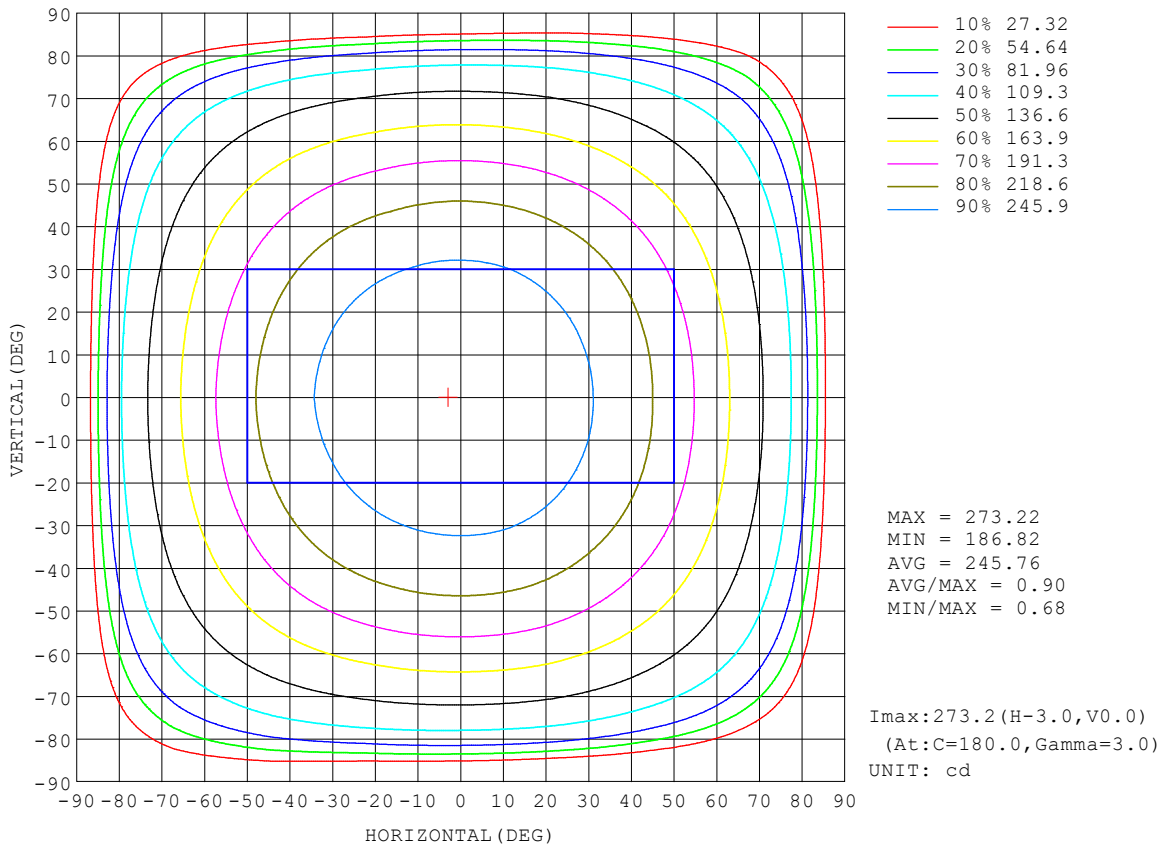


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

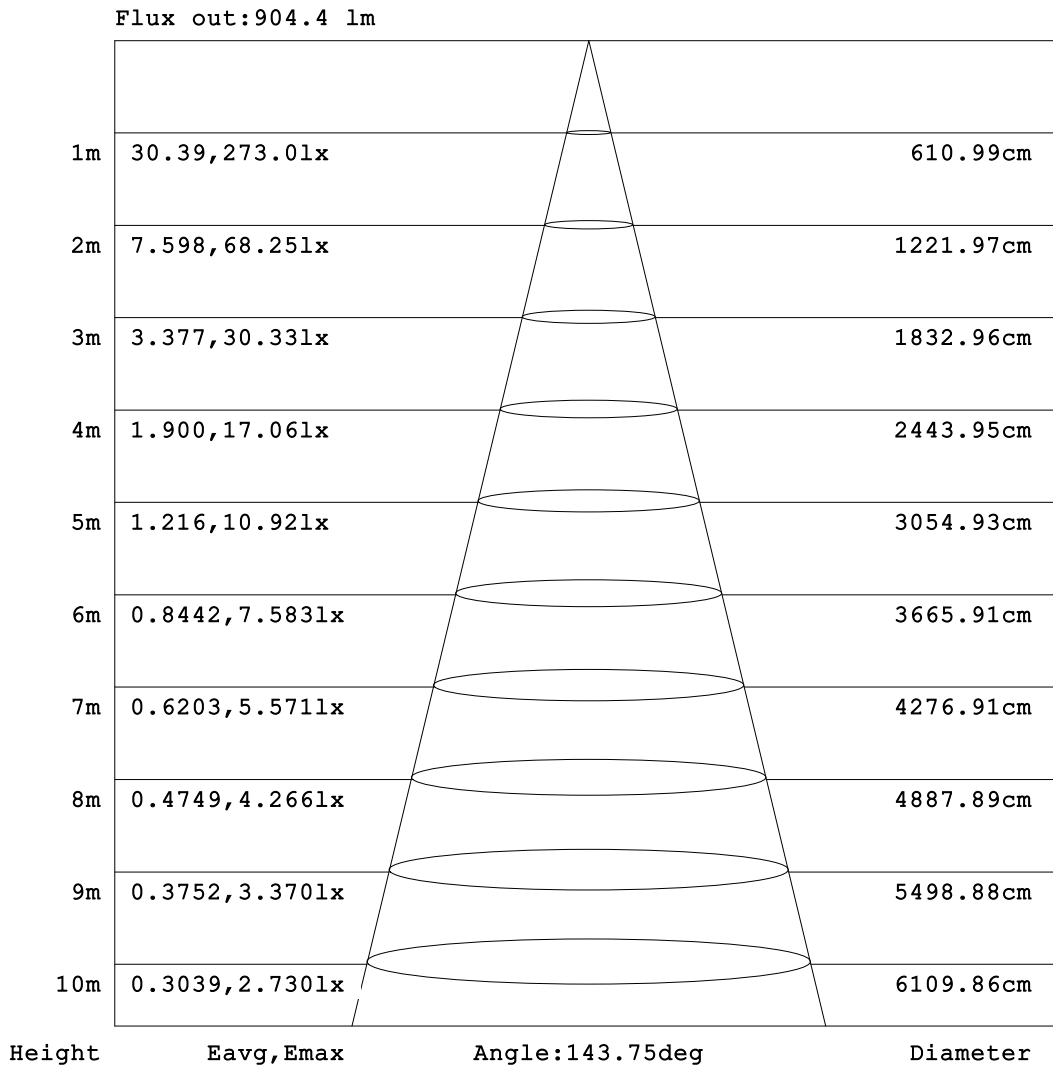


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

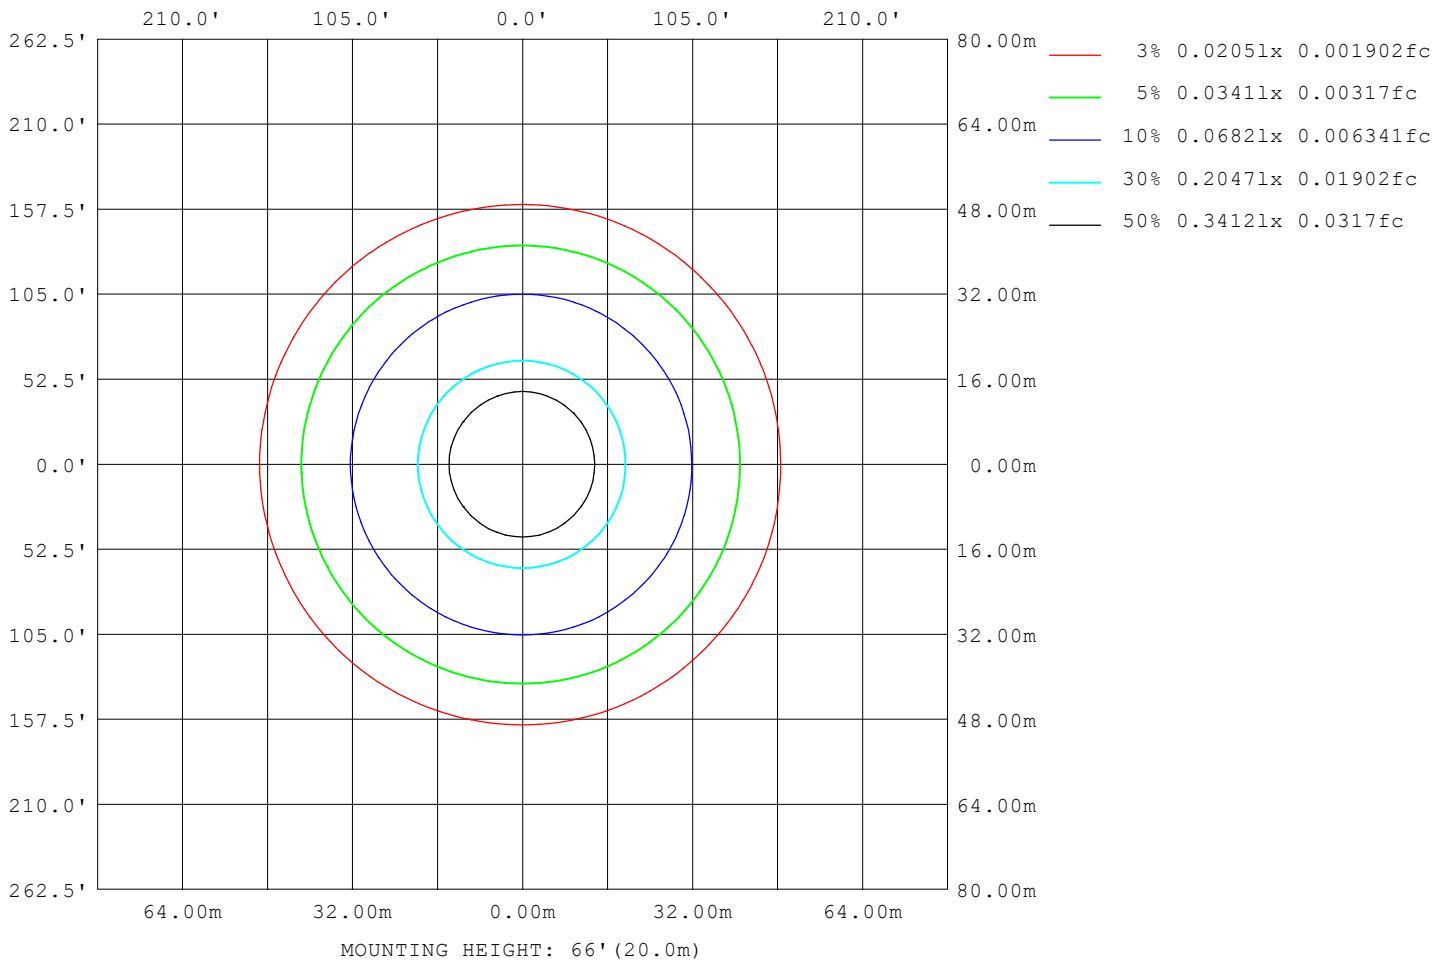

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3437
L_0~180 (75) av	4363
L_0~180 (85) av	4542
L_90~270 (65) av	3421
L_90~270 (75) av	4305
L_90~270 (85) av	3037
L_45 (65) av	3428
L_45 (75) av	4327
L_45 (85) av	3789

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

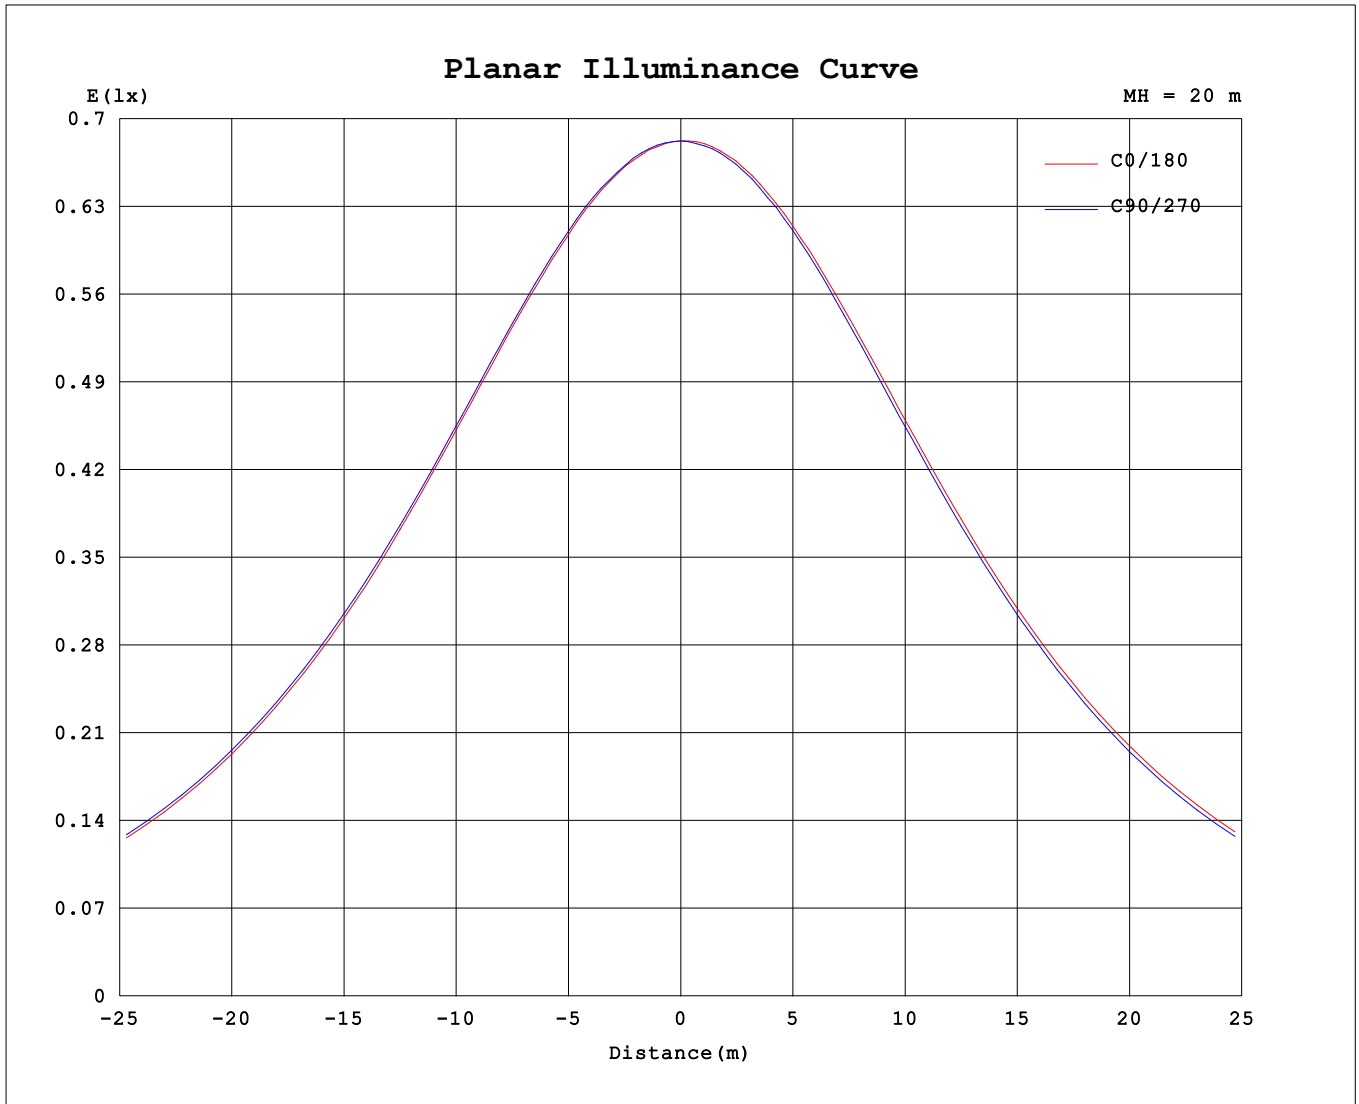

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.85V I:0.1137A P:13.419W PF:0.9850 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1050.21x1 lm		
NAME: DS-LED-6-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	273	273	273	273	273	273	273	273	273	273	273	273	273	273	273	273			
5	271	272	272	272	272	272	272	272	273	272	272	272	272	272	272	272			
10	269	269	270	270	270	270	271	271	271	271	271	270	270	270	270	269			
15	265	266	266	266	266	267	267	268	268	268	267	267	267	267	266	266			
20	260	261	262	262	262	262	263	263	264	264	263	263	262	262	261	261			
25	254	255	256	256	256	257	258	258	259	258	257	257	256	256	255	255			
30	247	248	249	250	249	250	251	251	252	251	251	249	249	249	248	248			
35	239	240	241	242	242	242	243	244	245	244	243	241	241	241	240	239			
40	229	230	231	233	232	233	234	235	236	235	234	232	232	232	231	230			
45	218	220	221	222	222	223	224	225	226	224	223	221	221	221	220	219			
50	205	207	208	209	209	210	211	212	213	211	210	208	208	207	206	206			
55	190	192	193	195	195	195	197	197	199	197	195	193	192	192	191	191			
60	174	175	177	179	178	179	180	181	182	180	179	177	176	176	175	174			
65	157	159	160	161	161	162	164	165	166	164	162	160	160	159	158	158			
70	140	141	142	144	144	145	147	148	149	147	145	143	143	142	141	140			
75	121	122	122	124	124	126	128	129	130	128	125	123	123	124	122	122			
80	93.8	93.1	92.8	95.0	96.1	98.6	103	105	106	102	97.0	93.9	94.8	97.5	97.2	96.6			
85	34.0	27.4	24.2	25.5	30.5	35.0	51.2	57.3	53.9	42.5	29.0	23.2	28.3	37.9	42.4	43.1			
90	0.98	0.87	0.84	0.83	0.85	0.88	1.05	1.25	0.61	0.54	0.50	0.51	0.52	0.57	0.63	0.63			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-12-28

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks: