
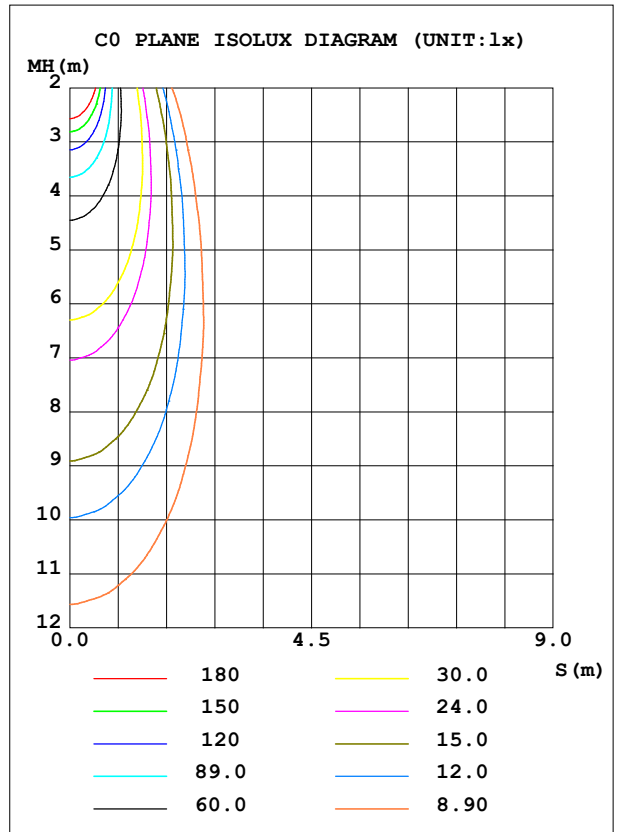


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 68.92 lm/W
MODEL		I _{max} (cd)	1215	S/MH (C0/180)		0.65
NOMINAL POWER (W)	11	LOR (%)	100.0	S/MH (C90/270)		0.51
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	739.71	η UP, DN (C0-180)		0.0, 54.7
NOMINAL FLUX (lm)	739.714	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 45.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.65

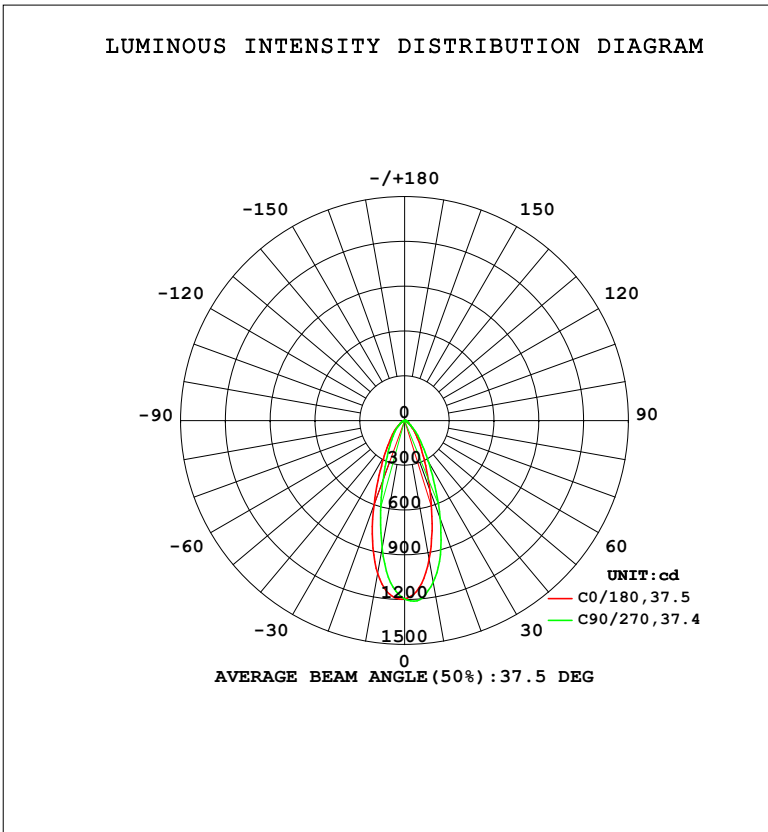

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	947.1	1050	1100	1105	1042	932.2	870.3	883.2	0- 10	104.4	104.4	14.1,14.1
20	497.7	599.3	699.0	691.4	600.8	490.7	425.7	438.5	10- 20	213.0	317.3	42.9,42.9
30	228.2	274.5	321.8	315.3	275.0	232.1	203.7	207.9	20- 30	175.2	492.5	66.6,66.6
40	117.8	134.4	148.9	145.8	132.8	120.2	111.0	112.3	30- 40	113.5	606.0	81.9,81.9
50	50.59	55.61	60.93	61.21	59.55	55.98	51.50	49.81	40- 50	68.77	674.8	91.2,91.2
60	25.75	27.44	28.01	28.32	28.76	28.29	27.24	26.17	50- 60	35.85	710.6	96.1,96.1
70	10.89	11.89	12.08	12.32	12.74	12.99	12.04	11.21	60- 70	19.00	729.6	98.6,98.6
80	3.232	4.208	4.961	4.534	4.247	4.877	4.933	3.978	70- 80	8.536	738.2	99.8,99.8
90	0.0649	0.0631	0.0858	0.0655	0.0467	0.0434	0.0529	0.0464	80- 90	1.555	739.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

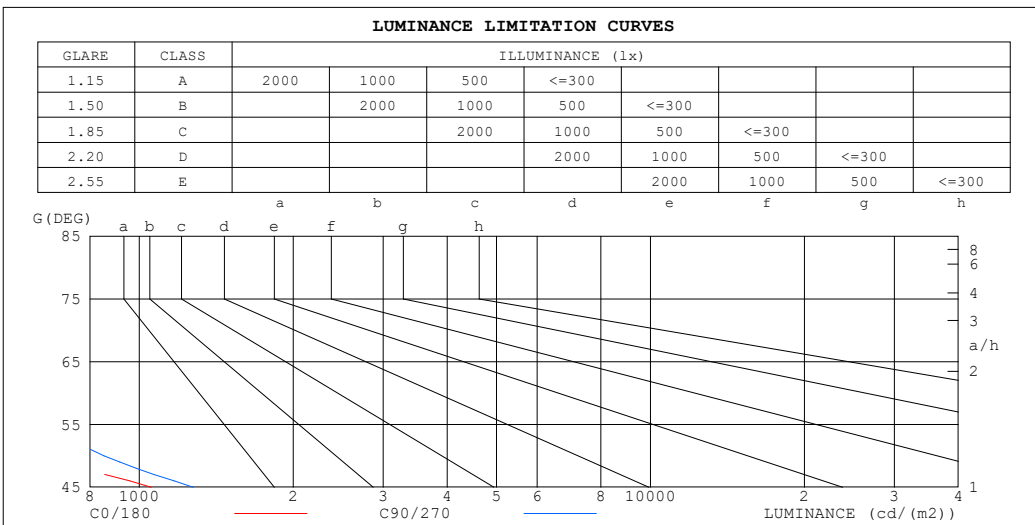

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18	210
80	167	257
75	247	277
70	286	318
65	370	420
60	462	504
55	578	651
50	706	853
45	1055	1274


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.04	1.02	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.02	.97	.94	.00	.96	.92	.97	.93	.90	.94	.91	.88	.91	.89	.87	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.81	.85	.82	.80	.78
4.0	.88	.82	.77	.87	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.76	.71	.81	.75	.71	.79	.74	.70	.78	.73	.70	.76	.72	.69	.68
6.0	.77	.71	.66	.76	.70	.66	.75	.69	.66	.73	.69	.65	.72	.68	.65	.63
7.0	.72	.66	.62	.72	.66	.62	.70	.65	.61	.69	.65	.61	.68	.64	.61	.59
8.0	.68	.62	.58	.68	.62	.58	.67	.61	.58	.66	.61	.57	.65	.60	.57	.56
9.0	.65	.59	.55	.64	.59	.55	.63	.58	.54	.62	.58	.54	.62	.57	.54	.53
10.0	.62	.56	.52	.61	.55	.52	.60	.55	.52	.60	.55	.51	.59	.54	.51	.50

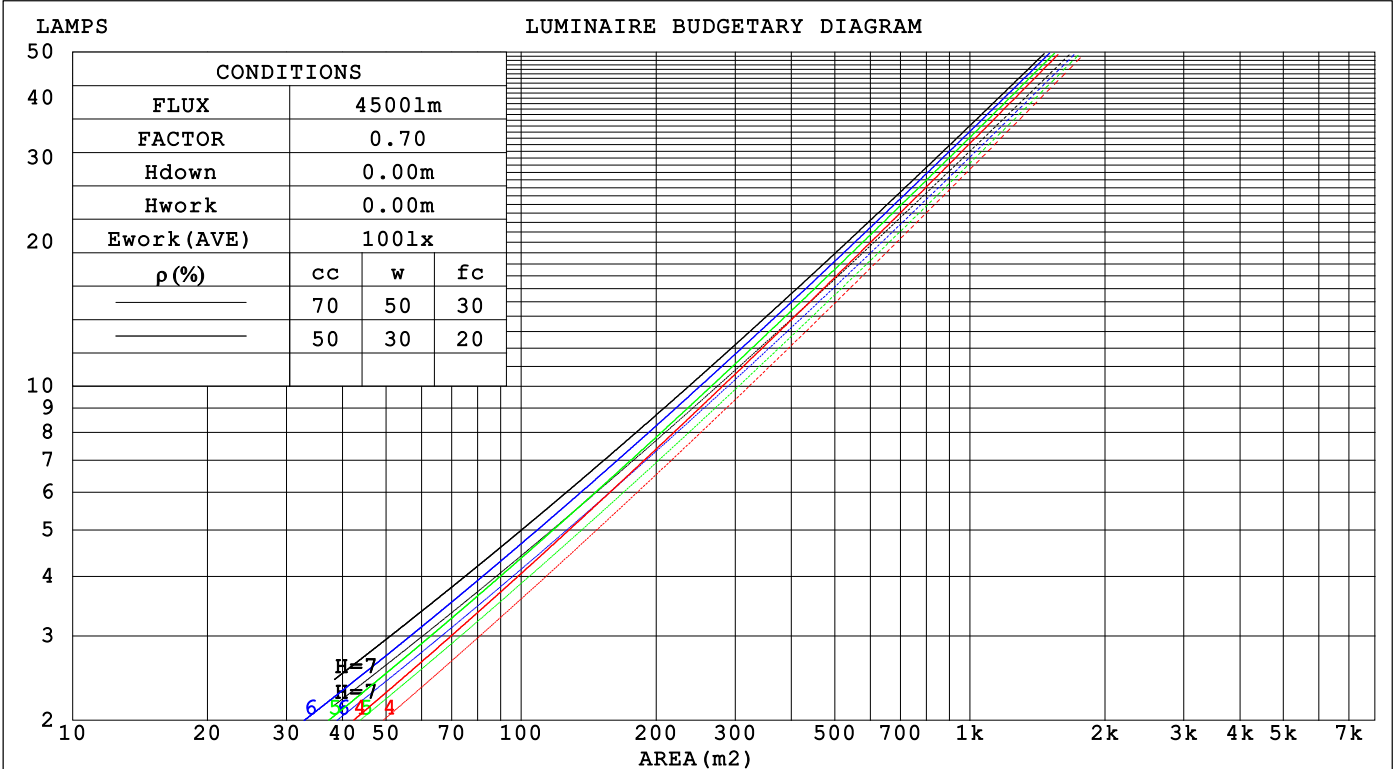

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.194	.110	.035	.187	.107	.034	.174	.100	.032	.163	.094	.030	.152	.088	.028	
2.0	.185	.101	.031	.179	.099	.030	.169	.094	.029	.159	.089	.028	.150	.085	.027	
3.0	.175	.093	.028	.170	.091	.027	.161	.087	.027	.152	.084	.026	.145	.080	.025	
4.0	.165	.086	.025	.161	.084	.025	.153	.081	.024	.146	.078	.024	.139	.075	.023	
5.0	.156	.080	.023	.152	.078	.023	.145	.076	.022	.139	.073	.022	.133	.071	.021	
6.0	.148	.074	.021	.144	.073	.021	.138	.071	.021	.133	.069	.020	.127	.067	.020	
7.0	.140	.069	.020	.137	.068	.019	.132	.067	.019	.127	.065	.019	.122	.063	.019	
8.0	.133	.065	.018	.131	.064	.018	.126	.063	.018	.121	.061	.018	.117	.060	.017	
9.0	.127	.061	.017	.124	.061	.017	.120	.059	.017	.116	.058	.017	.112	.057	.016	
10.0	.121	.058	.016	.119	.057	.016	.115	.056	.016	.111	.055	.016	.108	.054	.016	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.085	.058	.054	.050	.019	.017	.016	
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.136	.099	.071	.117	.086	.062	.080	.060	.043	.046	.035	.026	.015	.011	.008	
5.0	.128	.088	.058	.110	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.041	.097	.061	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.035	.092	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.4	10.4	9.6	10.6	10.8	10.3	11.3	10.5	11.4	11.6
3H	9.7	10.6	10.0	10.8	11.0	10.5	11.5	10.8	11.7	11.9
4H	9.8	10.7	10.1	10.9	11.1	10.6	11.5	10.9	11.7	12.0
6H	9.8	10.7	10.1	10.9	11.2	10.7	11.5	11.0	11.8	12.0
8H	9.8	10.6	10.1	10.9	11.1	10.7	11.5	11.0	11.8	12.0
12H	9.8	10.5	10.1	10.8	11.1	10.7	11.5	11.0	11.7	12.0
4H 2H	9.5	10.4	9.8	10.6	10.9	10.3	11.2	10.6	11.4	11.6
3H	10.0	10.7	10.3	11.0	11.3	10.7	11.5	11.0	11.7	12.0
4H	10.1	10.8	10.5	11.1	11.4	10.9	11.5	11.2	11.8	12.2
6H	10.2	10.8	10.6	11.2	11.5	11.0	11.6	11.4	11.9	12.3
8H	10.2	10.8	10.6	11.1	11.5	11.0	11.6	11.4	12.0	12.3
12H	10.1	10.7	10.6	11.0	11.4	11.1	11.6	11.5	11.9	12.3
8H 4H	10.1	10.7	10.5	11.1	11.4	10.8	11.4	11.2	11.8	12.1
6H	10.3	10.7	10.7	11.1	11.6	11.1	11.5	11.5	11.9	12.3
8H	10.3	10.7	10.7	11.1	11.5	11.1	11.5	11.6	12.0	12.4
12H	10.2	10.6	10.7	11.0	11.5	11.2	11.5	11.6	12.0	12.4
12H 4H	10.1	10.6	10.5	11.0	11.4	10.8	11.3	11.2	11.7	12.1
6H	10.3	10.7	10.7	11.1	11.5	11.0	11.4	11.5	11.9	12.3
8H	10.3	10.6	10.7	11.1	11.5	11.1	11.5	11.6	11.9	12.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.1 / - 1.5	+ 1.1 / - 1.6
1.5H	+ 1.4 / - 1.2	+ 1.8 / - 1.3
2.0H	+ 2.0 / - 1.3	+ 2.5 / - 1.3

CIE Pub.117, 739.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	80	73	68	80	72	68	79	72	68	64
0.80	88	81	77	88	81	77	86	80	76	72
1.00	94	87	83	93	87	83	91	87	82	77
1.25	99	93	88	98	92	88	96	91	87	82
1.50	102	96	92	101	96	92	98	94	91	86
2.00	106	101	97	104	100	96	101	98	95	89
2.50	108	103	100	106	102	99	103	100	97	91
3.00	110	106	103	108	104	101	105	102	99	92
4.00	112	109	106	110	107	105	106	104	102	95
5.00	114	111	109	112	109	107	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

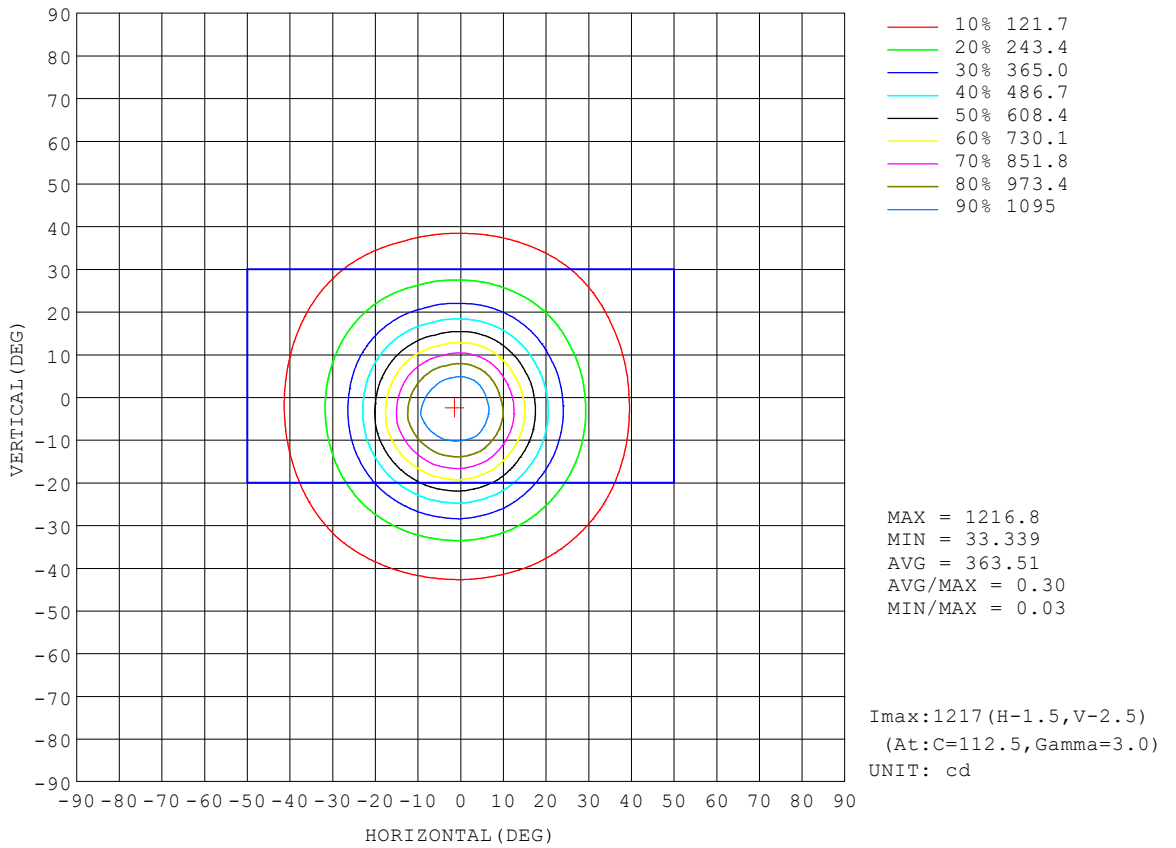


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

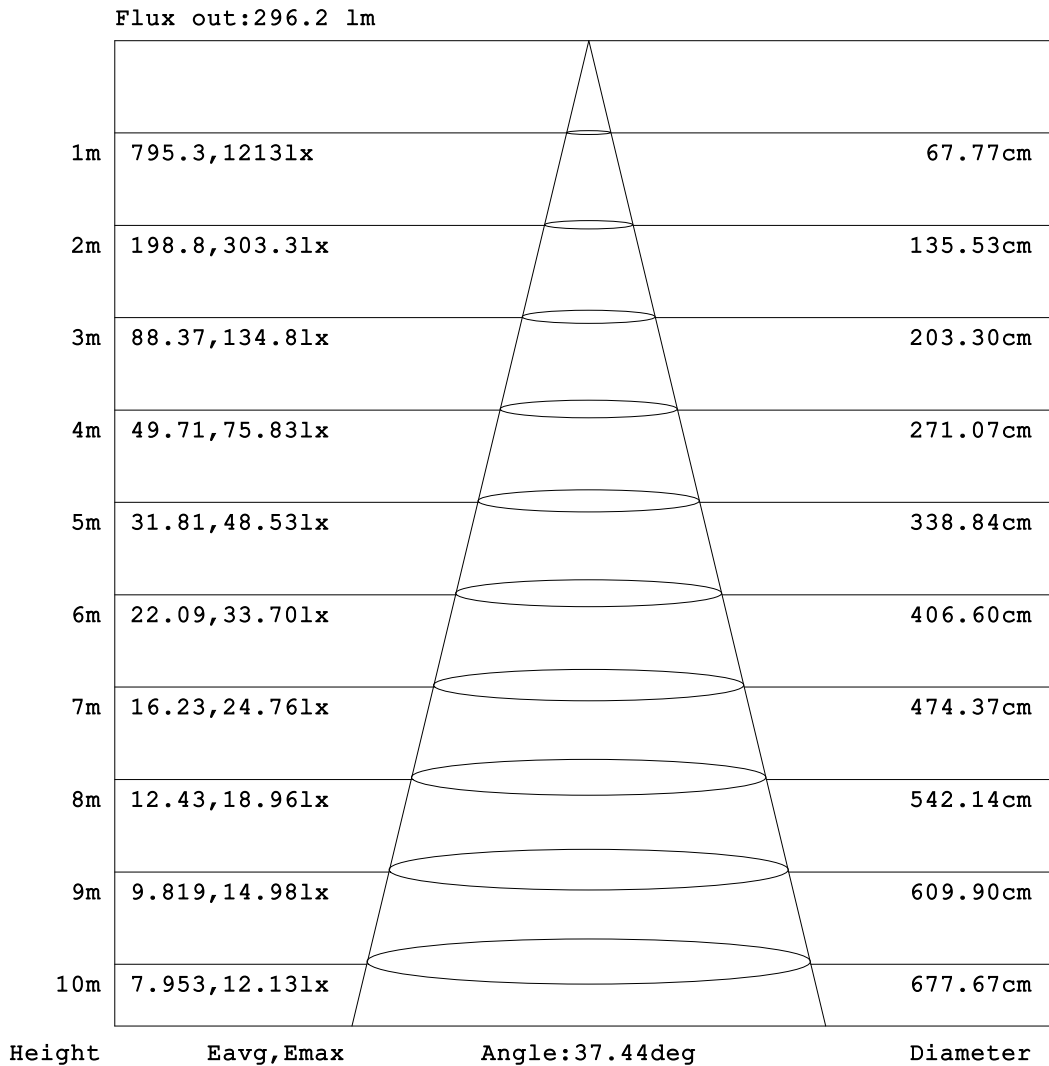


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

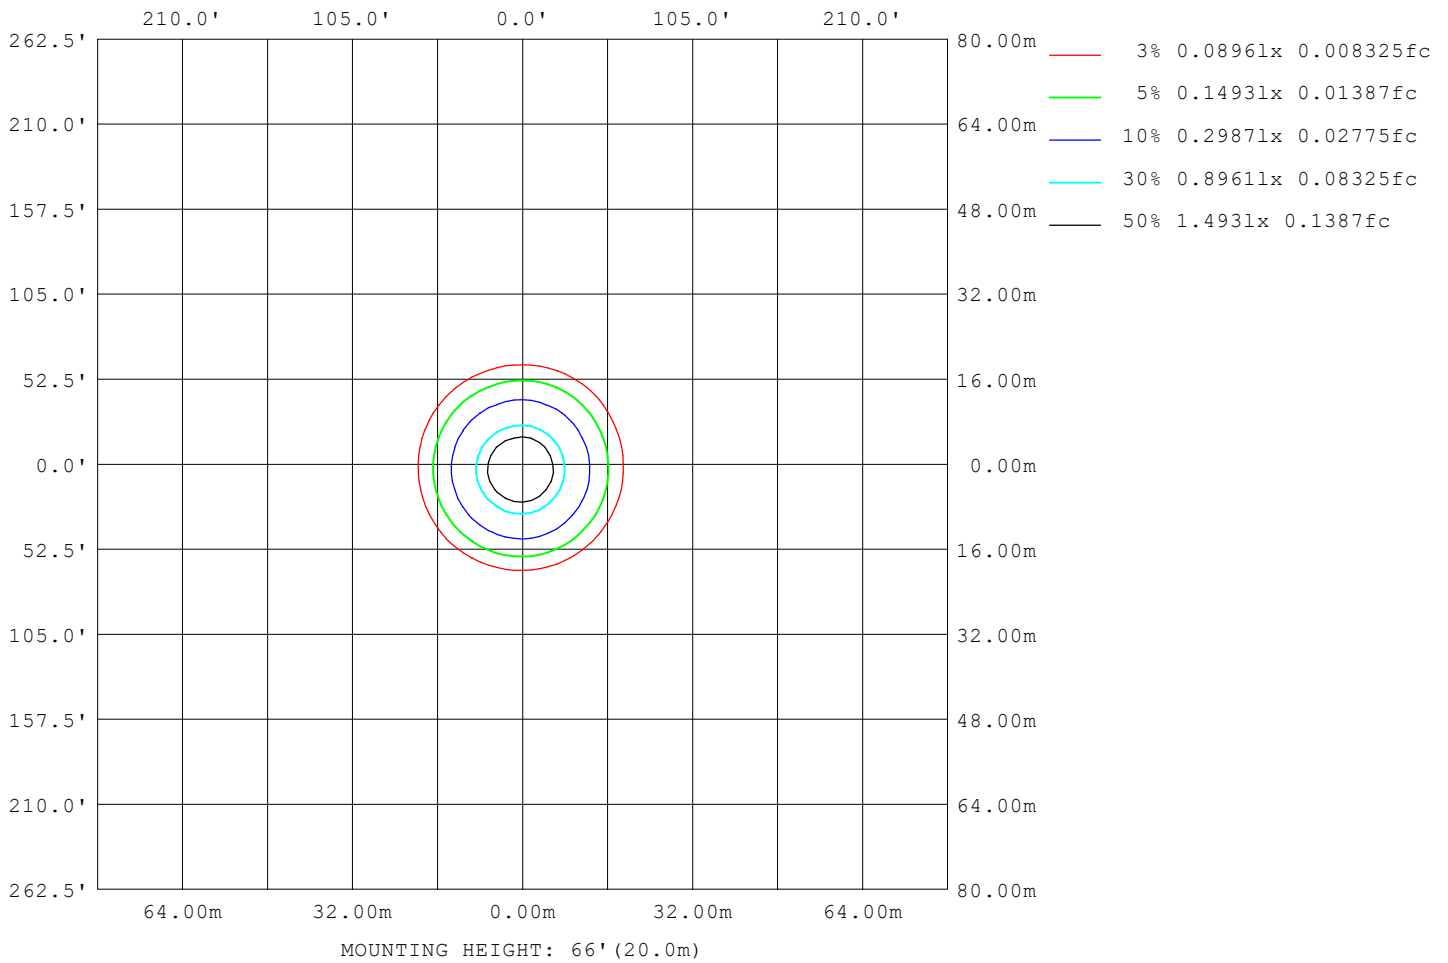

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	399
L_0~180 (75) av	273
L_0~180 (85) av	39
L_90~270 (65) av	408
L_90~270 (75) av	283
L_90~270 (85) av	196
L_45 (65) av	408
L_45 (75) av	286
L_45 (85) av	76

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

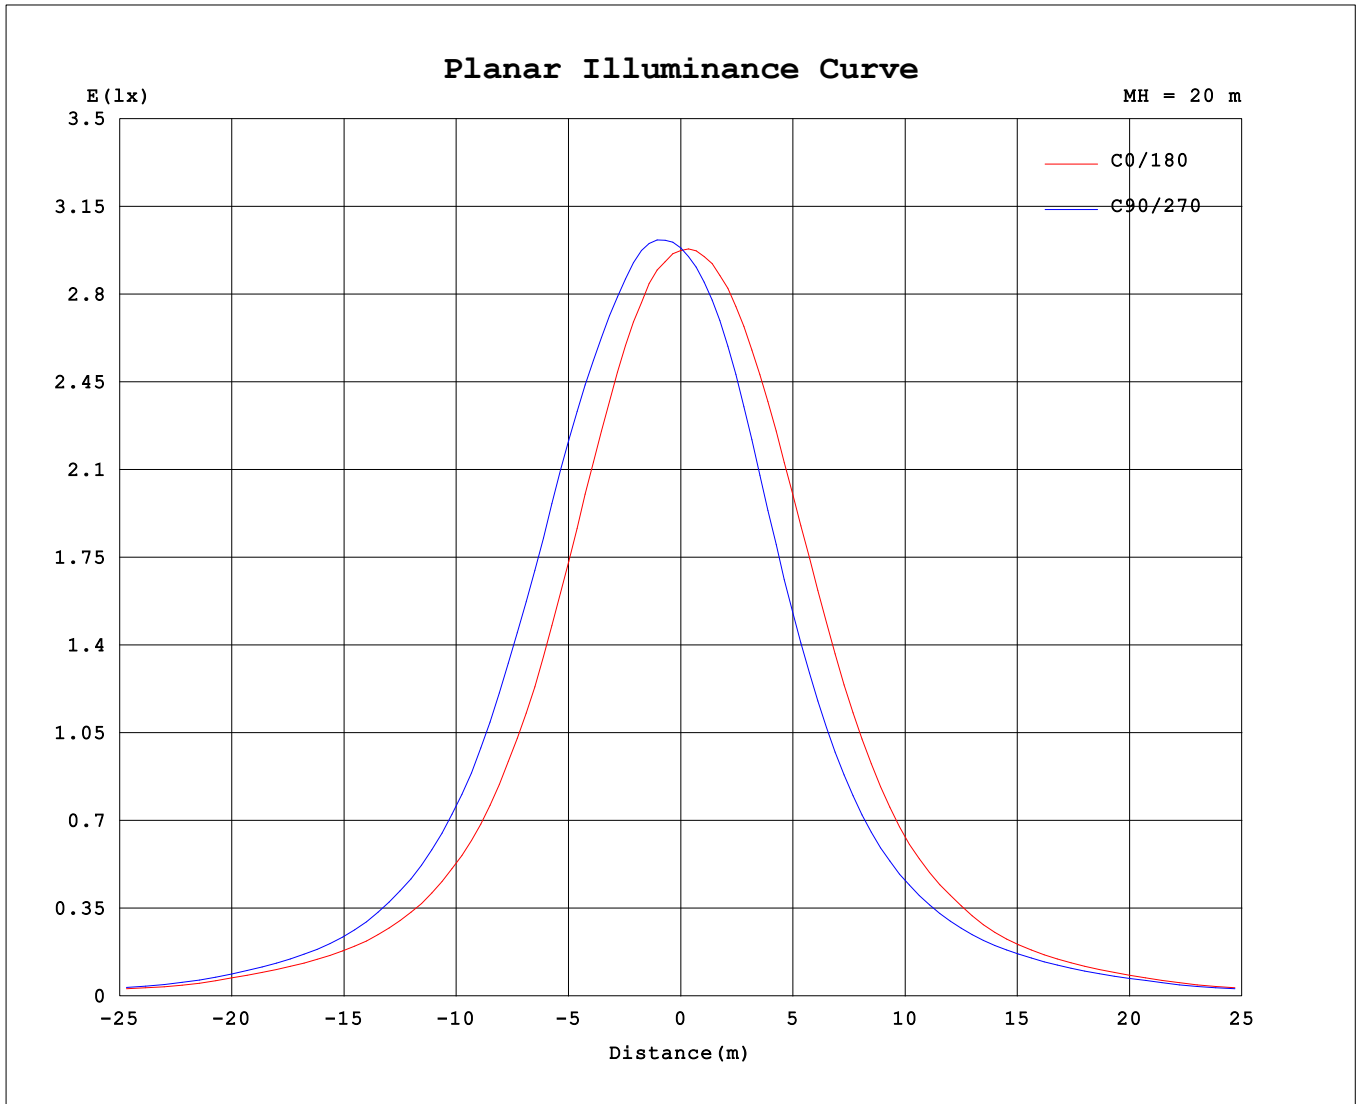

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.82V I:0.0918A P:10.733W PF:0.9753 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:739.714x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194	1194			
5	1123	1149	1167	1194	1204	1201	1198	1191	1167	1141	1116	1097	1091	1087	1093	1101			
10	947	1006	1050	1092	1100	1111	1105	1095	1042	988	932	885	870	870	883	899			
15	716	783	840	904	931	937	922	895	835	770	701	640	625	629	637	656			
20	498	550	599	666	699	703	691	661	601	545	491	443	426	427	439	453			
25	335	368	403	451	479	483	472	444	407	372	334	303	290	291	296	306			
30	228	252	275	303	322	321	315	295	275	254	232	211	204	203	208	213			
35	161	177	191	210	216	217	212	199	186	175	163	151	147	148	150	152			
40	118	126	134	144	149	148	146	139	133	126	120	113	111	111	112	112			
45	83.2	87.3	92.0	98.2	100	103	102	97.8	94.9	92.3	88.0	82.4	80.7	80.5	82.1	79.7			
50	50.6	52.6	55.6	59.0	60.9	61.4	61.2	60.8	59.5	58.8	56.0	52.8	51.5	50.9	49.8	48.9			
55	37.0	38.2	39.6	41.3	41.5	41.7	41.8	42.1	41.8	41.5	40.3	38.9	38.3	38.0	37.1	36.0			
60	25.7	26.6	27.4	28.1	28.0	28.2	28.3	28.8	28.8	28.7	28.3	27.5	27.2	27.0	26.2	25.1			
65	17.4	18.2	19.2	19.8	19.7	19.7	19.8	20.0	20.0	20.3	20.1	19.1	18.6	18.4	17.7	16.8			
70	10.9	11.3	11.9	12.2	12.1	12.1	12.3	12.5	12.7	13.1	13.0	12.5	12.0	11.8	11.2	10.7			
75	7.14	7.46	7.90	8.03	7.95	8.07	8.24	8.35	8.59	8.92	9.05	8.62	8.31	8.08	7.73	7.19			
80	3.23	3.52	4.21	4.95	4.96	4.94	4.53	4.38	4.25	4.49	4.88	5.07	4.93	4.67	3.98	3.29			
85	0.17	0.26	0.69	1.62	2.04	1.56	0.99	0.79	0.59	0.58	0.79	1.36	1.76	1.19	0.48	0.13			
90	0.06	0.06	0.06	0.07	0.09	0.07	0.07	0.07	0.05	0.04	0.04	0.05	0.05	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-05-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: