
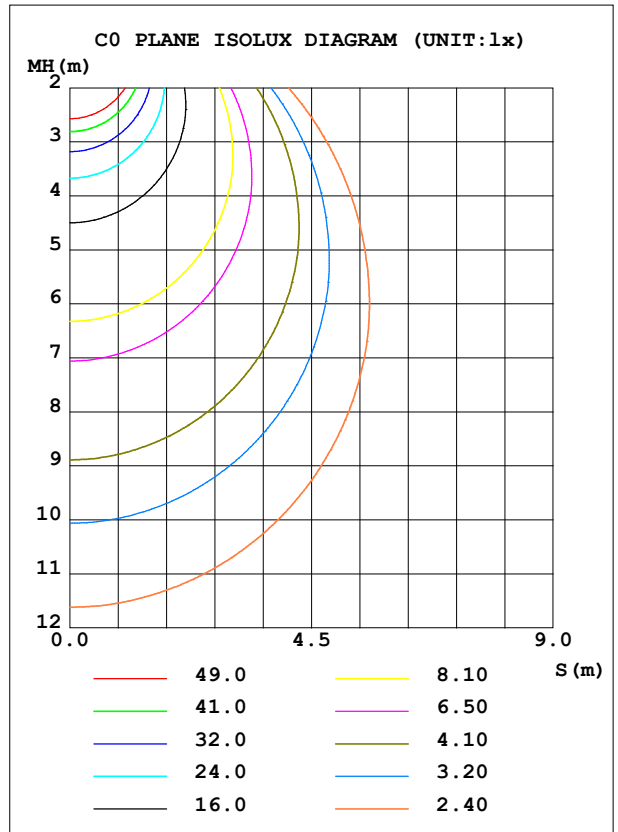


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELED-6-S12W-5CCT-WH-SQ-BF		Imax (cd)	322.3	S/MH (C0/180)	1.26
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	892.66	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	892.656	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

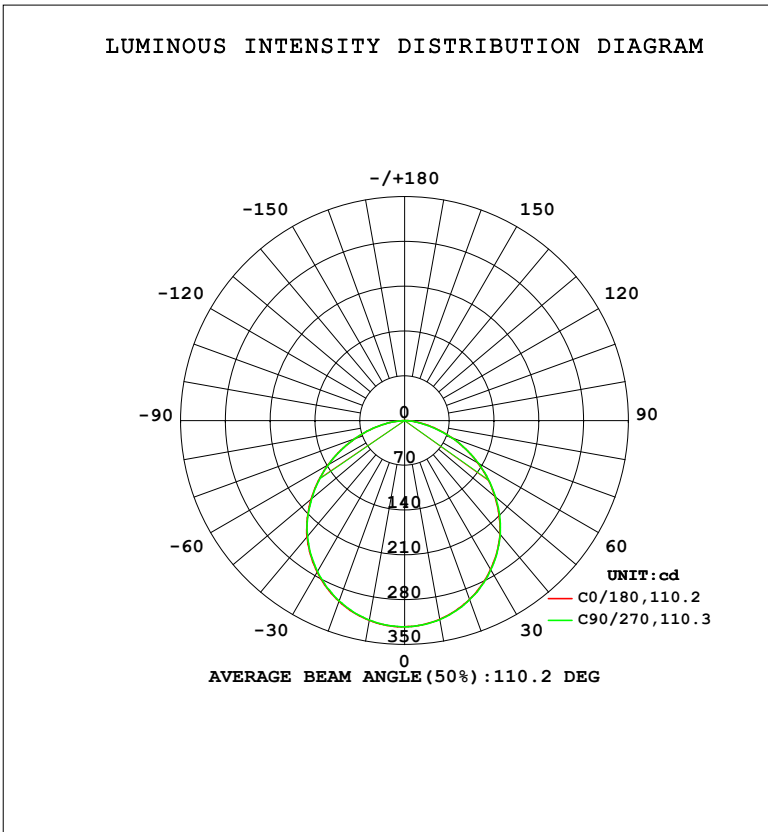

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	315.4	316.6	315.9	317.2	317.3	316.2	316.7	315.1	0- 10	30.47	30.47	3.41,3.41
20	297.3	299.0	297.9	300.9	300.6	299.0	299.8	296.7	10- 20	87.17	117.6	13.2,13.2
30	269.0	271.0	269.5	273.9	273.5	271.1	272.4	268.2	20- 30	131.9	249.5	28,28
40	232.0	234.4	232.6	237.5	237.4	234.5	236.4	231.1	30- 40	158.7	408.3	45.7,45.7
50	184.3	190.0	185.6	191.8	190.7	190.2	189.7	184.6	40- 50	163.8	572.1	64.1,64.1
60	132.2	135.4	132.9	139.2	138.1	135.2	137.3	131.8	50- 60	145.1	717.2	80.3,80.3
70	78.27	78.86	78.18	82.99	82.71	78.82	82.92	75.87	60- 70	106.5	823.6	92.3,92.3
80	29.04	28.44	27.43	31.12	31.76	28.66	31.81	26.63	70- 80	56.58	880.2	98.6,98.6
90	0.3512	0.3375	0.3490	0.3996	0.2432	0.2174	0.3825	0.2308	80- 90	12.42	892.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

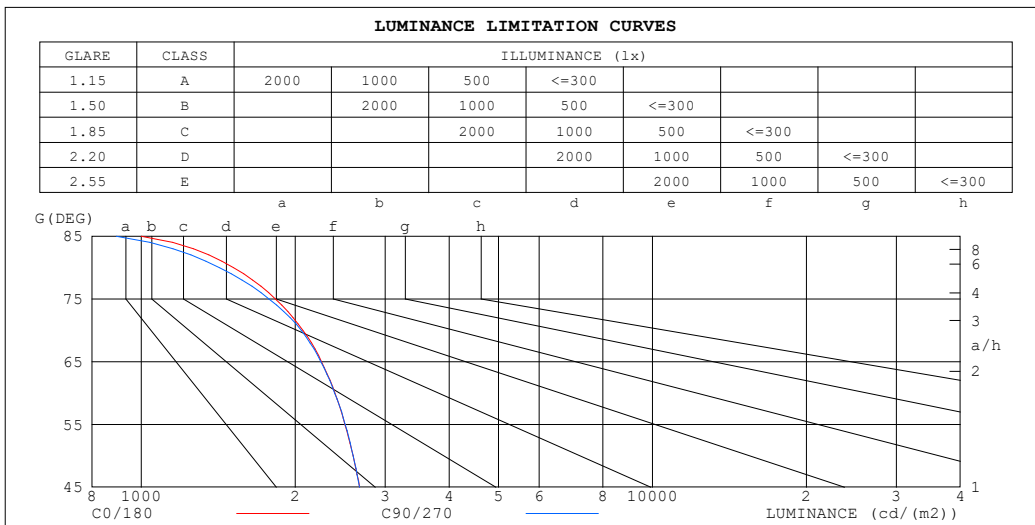

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	999	893
80	1514	1420
75	1828	1778
70	2071	2055
65	2252	2246
60	2393	2390
55	2503	2505
50	2595	2597
45	2674	2674


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.73	.70
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.38	.31	.27	.37	.31	.26	.25

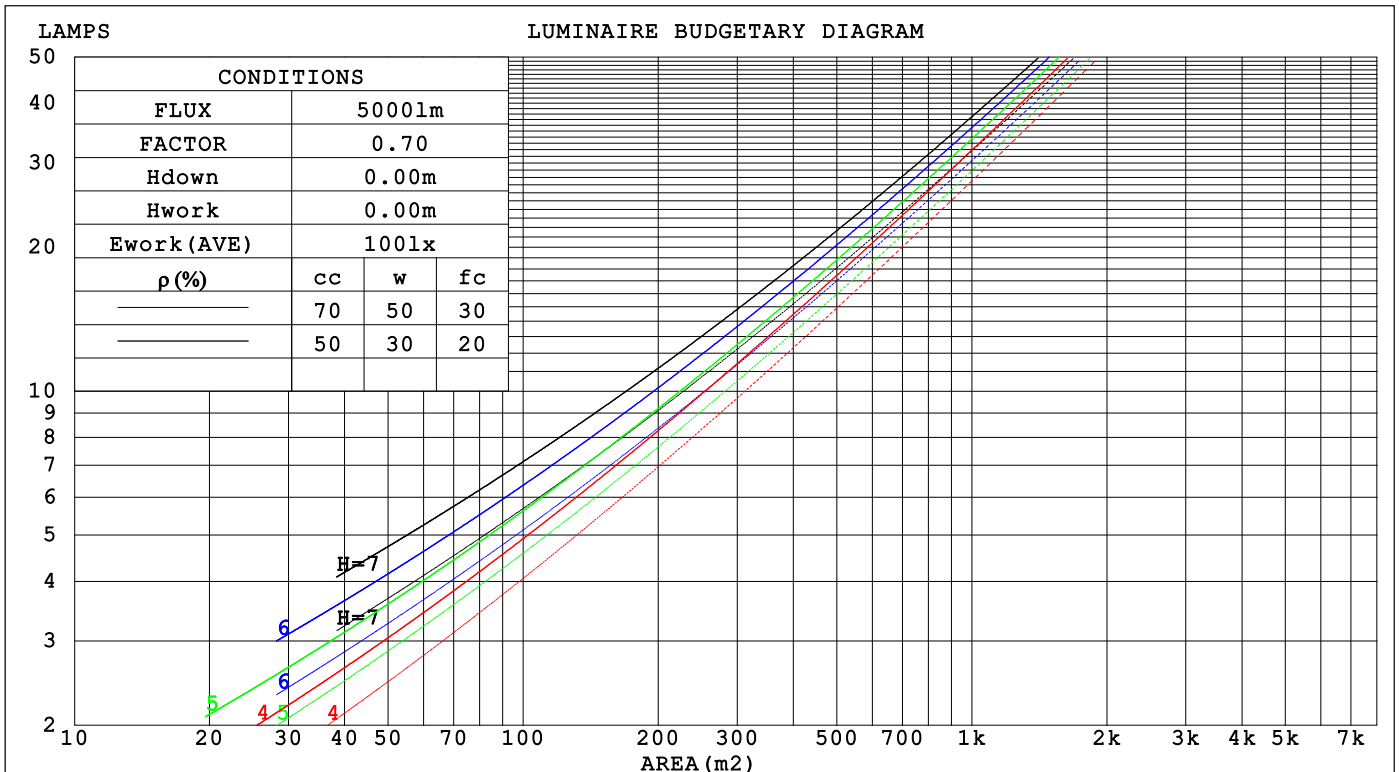

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.293	.167	.053	.280	.161	.051	.268	.154	.050	.257	.149	.048	
2.0	.285	.156	.048	.279	.154	.047	.267	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.265	.141	.042	.260	.139	.042	.250	.135	.041	.240	.132	.040	.231	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.176	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.085	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm										
NAME: LED-6-S12W-5CCT-WH-SQ-BF				TYPE:			WEIGHT:			
SPEC.: 2700K				DIM.:			SERIAL No.:			
MFR.:				SUR.:			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.9	16.7	18.1	18.3	16.6	18.1	16.8	18.3	18.5
3H	17.8	19.2	18.1	19.4	19.6	17.9	19.3	18.2	19.6	19.8
4H	18.3	19.6	18.6	19.8	20.1	18.4	19.7	18.7	20.0	20.3
6H	18.6	19.8	18.9	20.1	20.4	18.7	20.0	19.0	20.2	20.5
8H	18.6	19.8	19.0	20.1	20.4	18.8	20.0	19.1	20.3	20.5
12H	18.7	19.8	19.0	20.1	20.4	18.8	19.9	19.1	20.2	20.5
4H 2H	17.0	18.3	17.3	18.6	18.8	17.1	18.4	17.4	18.7	19.0
3H	18.5	19.7	18.9	20.0	20.3	18.7	19.8	19.0	20.1	20.4
4H	19.1	20.2	19.5	20.5	20.8	19.3	20.4	19.7	20.7	21.0
6H	19.5	20.5	19.9	20.8	21.2	19.7	20.6	20.1	21.0	21.4
8H	19.6	20.5	20.0	20.9	21.2	19.8	20.7	20.2	21.1	21.4
12H	19.7	20.5	20.1	20.9	21.3	19.9	20.7	20.3	21.0	21.4
8H 4H	19.3	20.2	19.7	20.6	21.0	19.5	20.4	19.9	20.7	21.1
6H	19.8	20.6	20.3	21.0	21.4	20.0	20.8	20.5	21.2	21.6
8H	20.0	20.6	20.5	21.1	21.5	20.2	20.9	20.7	21.3	21.7
12H	20.1	20.6	20.6	21.1	21.6	20.3	20.9	20.8	21.3	21.8
12H 4H	19.3	20.1	19.8	20.5	20.9	19.5	20.3	19.9	20.7	21.1
6H	19.9	20.5	20.3	20.9	21.4	20.1	20.7	20.5	21.1	21.6
8H	20.1	20.6	20.5	21.1	21.5	20.3	20.8	20.8	21.3	21.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 892.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	90	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	87	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

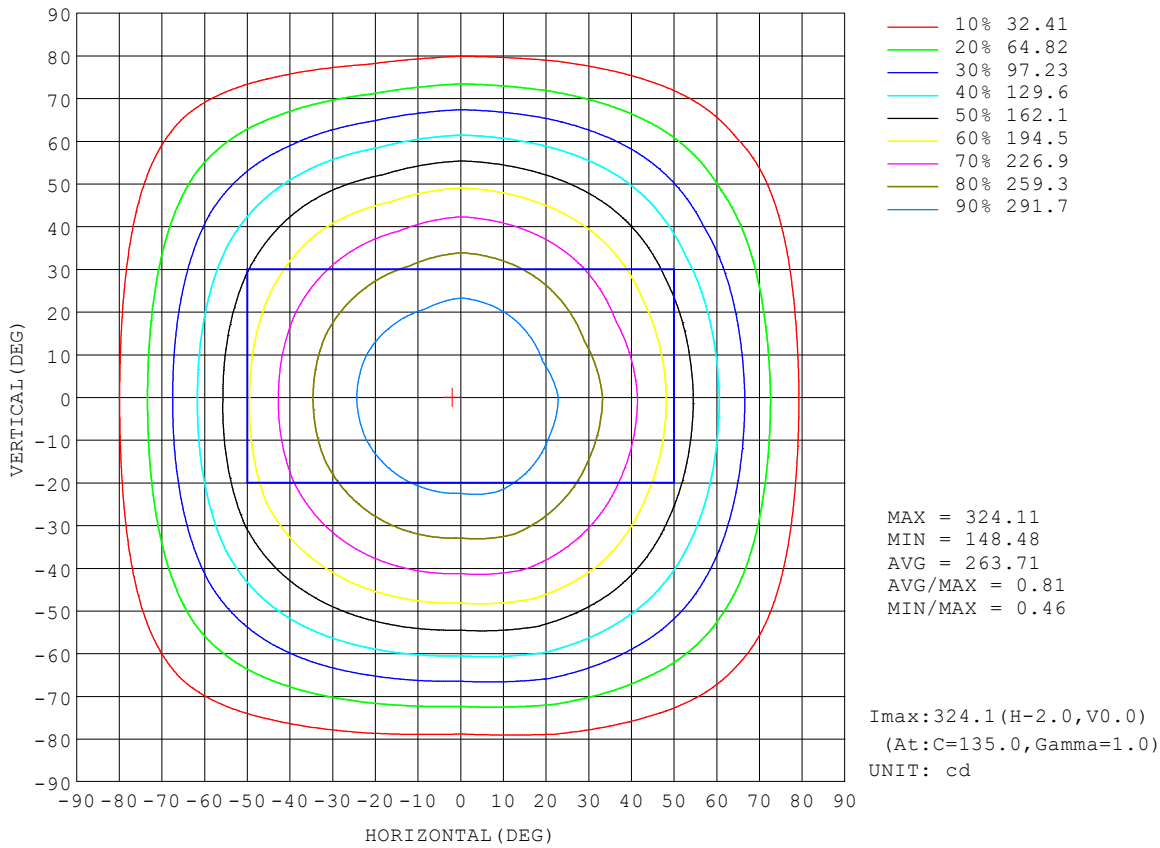


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

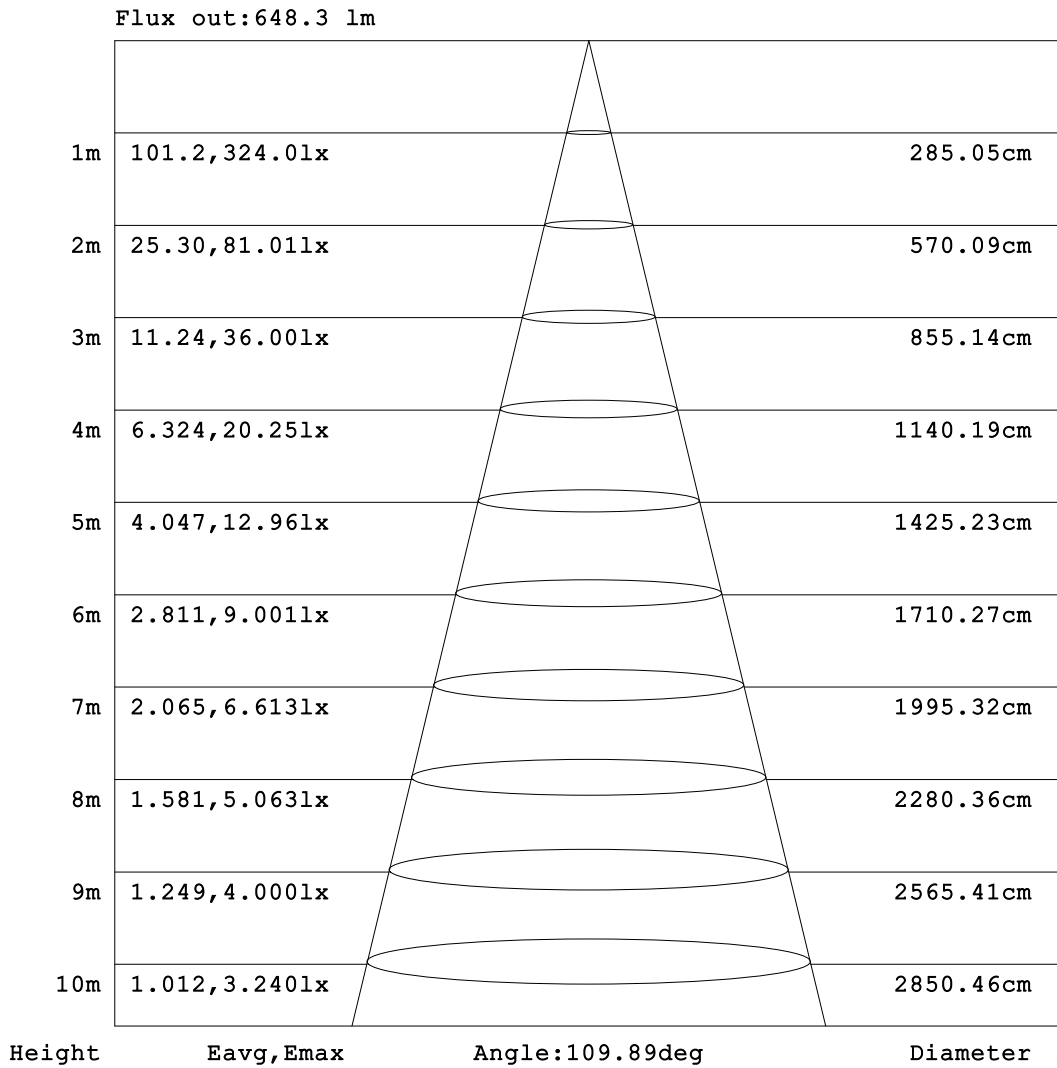


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3 °C
Operators:
Test Date:2023-02-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

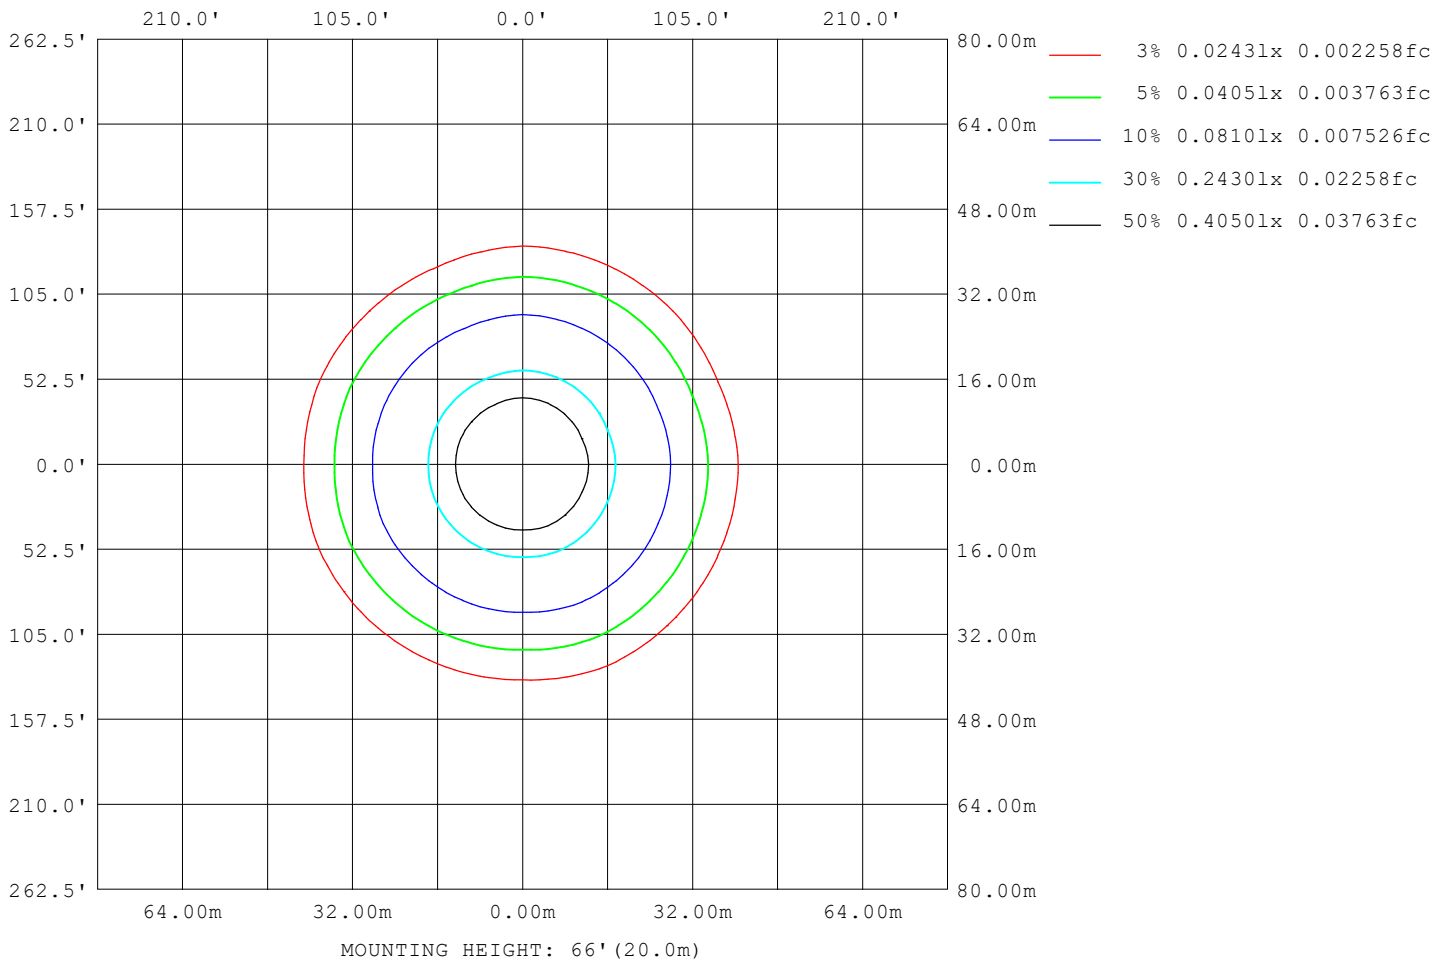

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2296
L_0~180 (75) av	1880
L_0~180 (85) av	1117
L_90~270 (65) av	2296
L_90~270 (75) av	1868
L_90~270 (85) av	1044
L_45 (65) av	2284
L_45 (75) av	1821
L_45 (85) av	1005

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

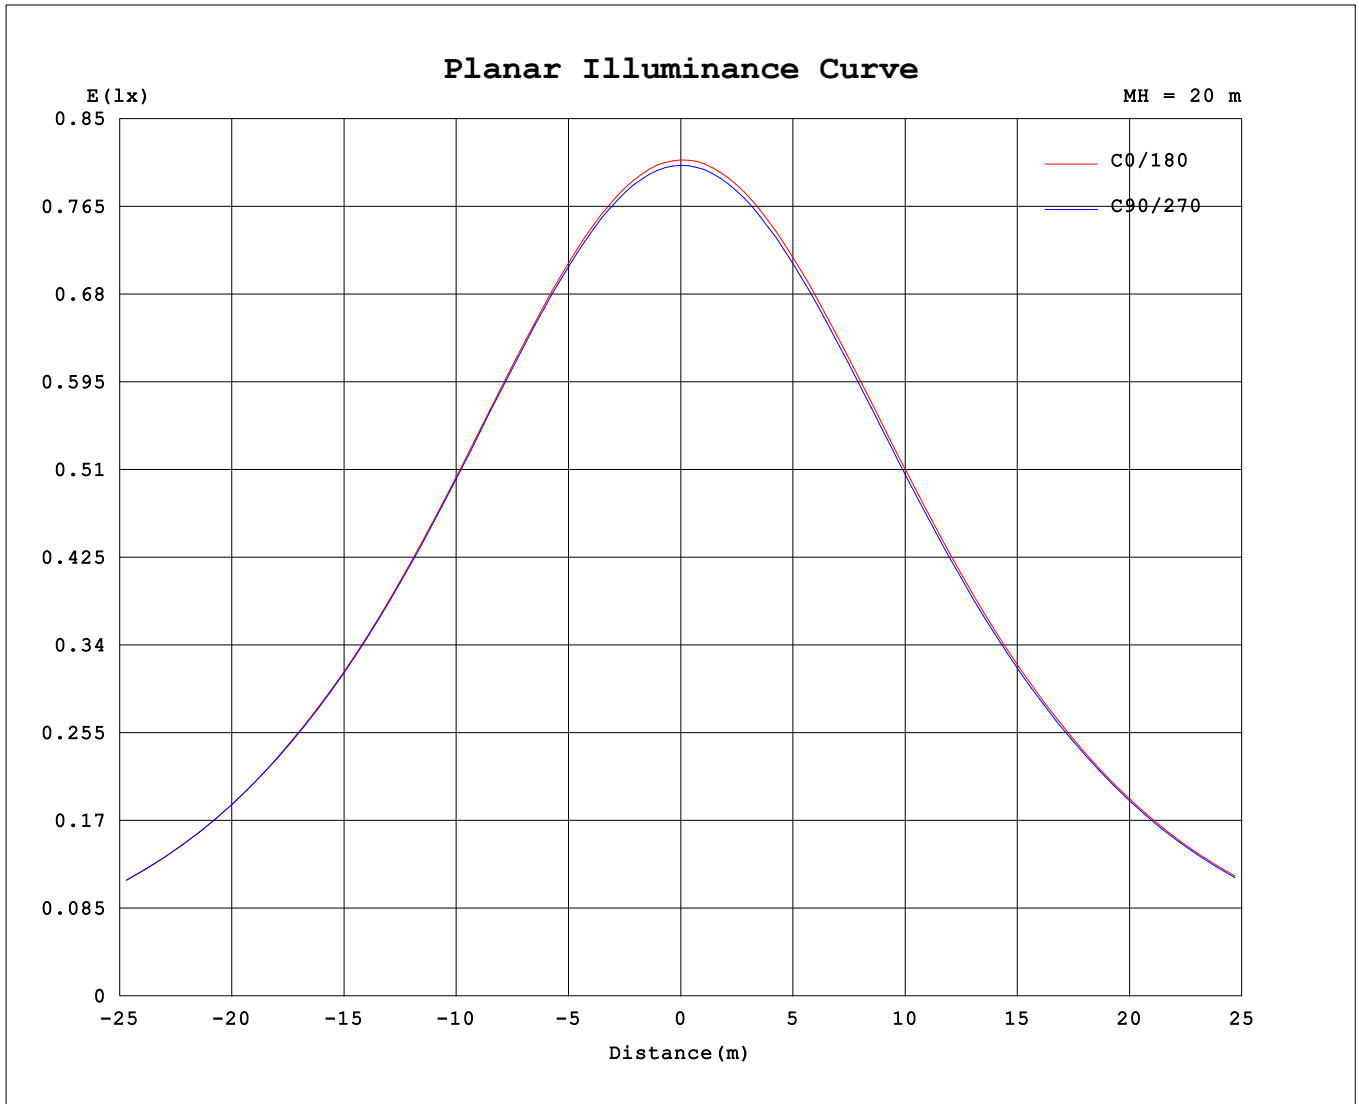

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.77V I:0.1357A P:12.021W PF:0.7397 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:892.656x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	322	322	322	322	322	322	322	322	322	322	322	322	322	322	322	322			
5	320	320	321	321	320	321	321	322	321	321	321	320	321	321	320	320			
10	315	315	317	317	316	316	317	318	317	317	316	315	317	316	315	314			
15	308	308	309	310	308	309	311	312	310	310	309	308	310	309	307	306			
20	297	297	299	300	298	299	301	302	301	301	299	297	300	298	297	295			
25	284	284	286	288	285	287	289	291	288	288	286	284	288	286	284	282			
30	269	269	271	273	269	272	274	276	274	274	271	269	272	270	268	266			
35	252	251	254	256	252	254	257	259	256	257	254	251	256	253	251	247			
40	232	232	234	237	233	235	238	241	237	237	235	232	236	234	231	228			
45	209	210	213	216	210	213	216	220	215	216	213	209	214	211	210	206			
50	184	185	190	192	186	188	192	197	191	192	190	184	190	187	185	182			
55	159	159	163	166	160	162	166	171	165	166	163	158	164	161	159	155			
60	132	132	135	139	133	136	139	143	138	140	135	132	137	134	132	127			
65	105	105	107	111	106	108	112	115	110	112	107	104	110	107	104	99.2			
70	78.3	77.2	78.9	83.0	78.2	80.4	83.0	86.1	82.7	83.8	78.8	77.3	82.9	80.4	75.9	71.7			
75	52.3	50.5	52.2	55.6	51.2	53.8	55.6	58.6	55.9	56.2	52.1	50.7	56.2	54.2	49.6	46.0			
80	29.0	26.9	28.4	31.2	27.4	30.1	31.1	33.7	31.8	31.8	28.7	27.3	31.8	30.6	26.6	23.7			
85	9.62	8.12	9.62	11.4	8.66	10.7	11.5	13.1	12.0	11.9	9.59	8.07	11.6	10.9	8.23	6.40			
90	0.35	0.35	0.34	0.47	0.35	0.34	0.40	0.62	0.24	0.21	0.22	0.23	0.38	0.31	0.23	0.24			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: