
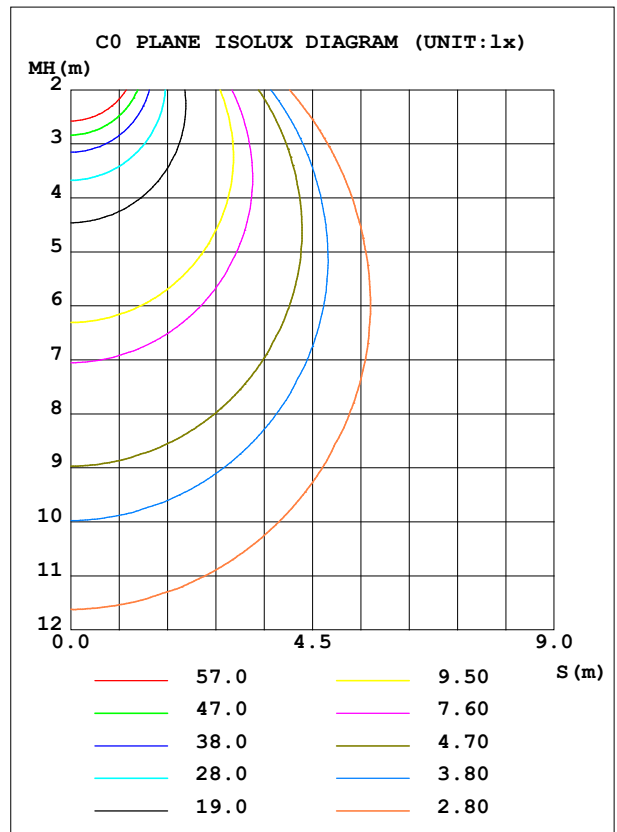


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELED-6-S12W-5CCT-WH-SQ-BF		Imax (cd)	378.0	S/MH (C0/180)	1.26
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1046.0	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	1046.03	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

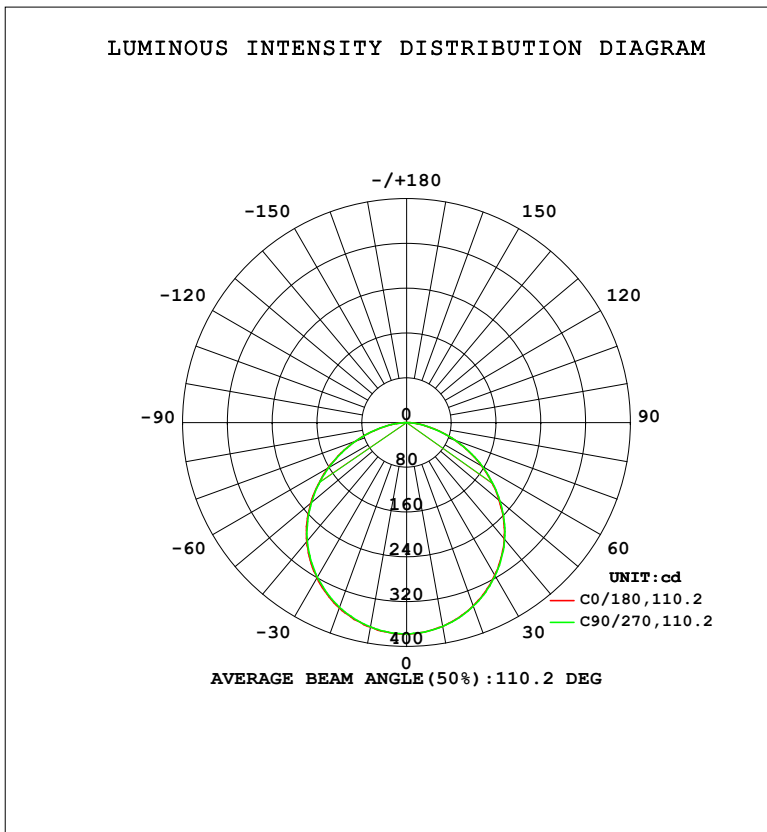

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	369.8	370.8	369.9	372.0	371.3	370.5	370.7	369.2	0- 10	35.71	35.71	3.41,3.41
20	348.2	350.6	349.0	352.5	352.3	349.8	351.0	347.9	10- 20	102.1	137.9	13.2,13.2
30	314.3	318.0	316.3	320.0	320.0	317.2	318.9	314.4	20- 30	154.5	292.4	27.9,27.9
40	271.7	275.0	272.7	278.3	278.1	274.1	276.3	270.4	30- 40	186.0	478.4	45.7,45.7
50	216.1	223.2	217.6	224.9	223.1	222.6	221.8	217.1	40- 50	192.0	670.3	64.1,64.1
60	154.9	158.8	156.0	163.3	161.9	158.4	160.5	154.7	50- 60	170.1	840.4	80.3,80.3
70	91.40	92.71	91.67	96.80	97.01	92.14	96.67	88.59	60- 70	124.8	965.2	92.3,92.3
80	33.98	33.35	32.75	36.18	37.25	33.42	37.56	31.22	70- 80	66.33	1031	98.6,98.6
90	0.4060	0.3863	0.4035	0.4291	0.2807	0.2493	0.4753	0.2662	80- 90	14.53	1046	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

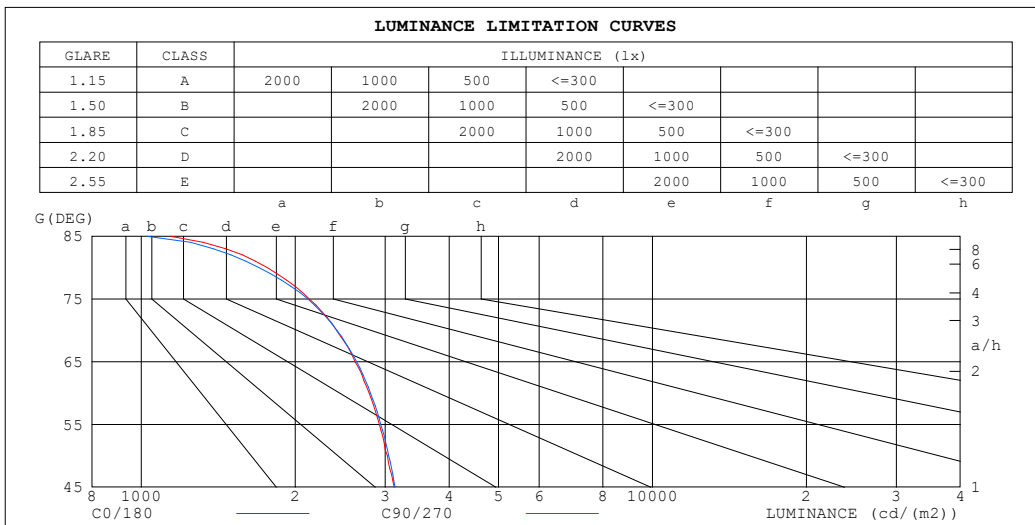

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1139	1024
80	1763	1699
75	2132	2117
70	2408	2414
65	2619	2637
60	2790	2809
55	2922	2941
50	3029	3049
45	3121	3137


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.73	.70
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.38	.31	.27	.37	.31	.26	.25

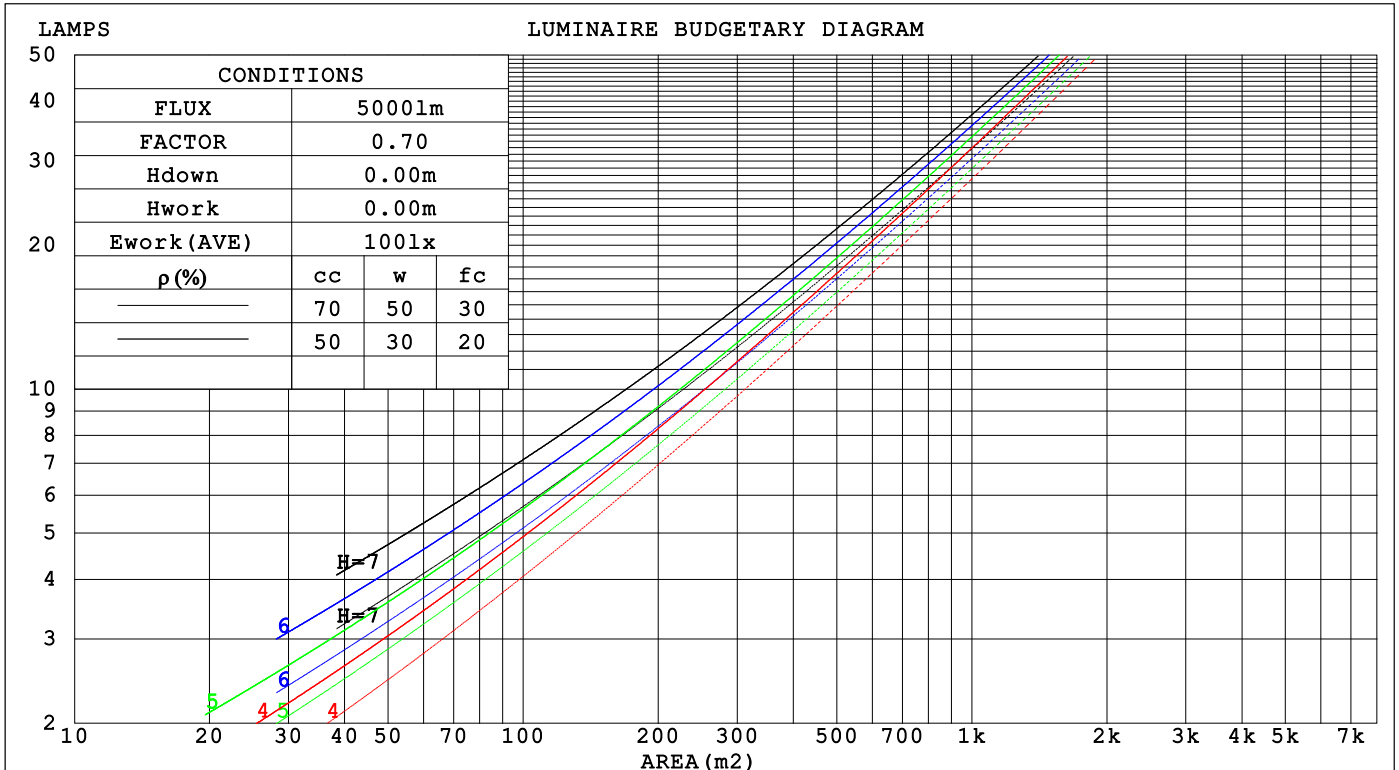

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.293	.167	.053	.280	.161	.051	.268	.154	.050	.257	.149	.048	
2.0	.285	.156	.048	.279	.154	.047	.267	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.265	.141	.042	.260	.139	.042	.250	.135	.041	.240	.132	.040	.231	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.176	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.085	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm										
NAME: LED-6-S12W-5CCT-WH-SQ-BF					TYPE:			WEIGHT:		
SPEC.: 4000K					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.9	16.7	18.1	18.3	16.6	18.1	16.8	18.3	18.5
3H	17.8	19.1	18.1	19.4	19.6	18.0	19.3	18.2	19.6	19.8
4H	18.2	19.6	18.6	19.8	20.1	18.4	19.8	18.8	20.0	20.3
6H	18.6	19.8	18.9	20.1	20.3	18.7	20.0	19.1	20.3	20.5
8H	18.6	19.8	19.0	20.1	20.4	18.8	20.0	19.1	20.3	20.6
12H	18.6	19.8	19.0	20.1	20.4	18.8	20.0	19.2	20.3	20.6
4H 2H	17.0	18.3	17.3	18.6	18.8	17.1	18.5	17.4	18.7	19.0
3H	18.5	19.7	18.9	20.0	20.3	18.7	19.9	19.1	20.1	20.5
4H	19.1	20.2	19.5	20.5	20.8	19.3	20.4	19.7	20.7	21.0
6H	19.5	20.4	19.9	20.8	21.2	19.7	20.7	20.1	21.0	21.4
8H	19.6	20.5	20.0	20.8	21.2	19.8	20.7	20.3	21.1	21.5
12H	19.7	20.5	20.1	20.8	21.2	19.9	20.7	20.3	21.1	21.5
8H 4H	19.3	20.2	19.7	20.6	20.9	19.5	20.4	19.9	20.8	21.1
6H	19.8	20.6	20.3	21.0	21.4	20.1	20.8	20.5	21.2	21.6
8H	20.0	20.6	20.5	21.1	21.5	20.2	20.9	20.7	21.3	21.8
12H	20.1	20.6	20.6	21.1	21.5	20.3	20.9	20.8	21.3	21.8
12H 4H	19.3	20.1	19.8	20.5	20.9	19.5	20.3	19.9	20.7	21.1
6H	19.9	20.5	20.3	20.9	21.4	20.1	20.7	20.5	21.1	21.6
8H	20.1	20.6	20.5	21.0	21.5	20.3	20.8	20.8	21.3	21.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	59	75	65	58	73	67	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	90	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	87	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

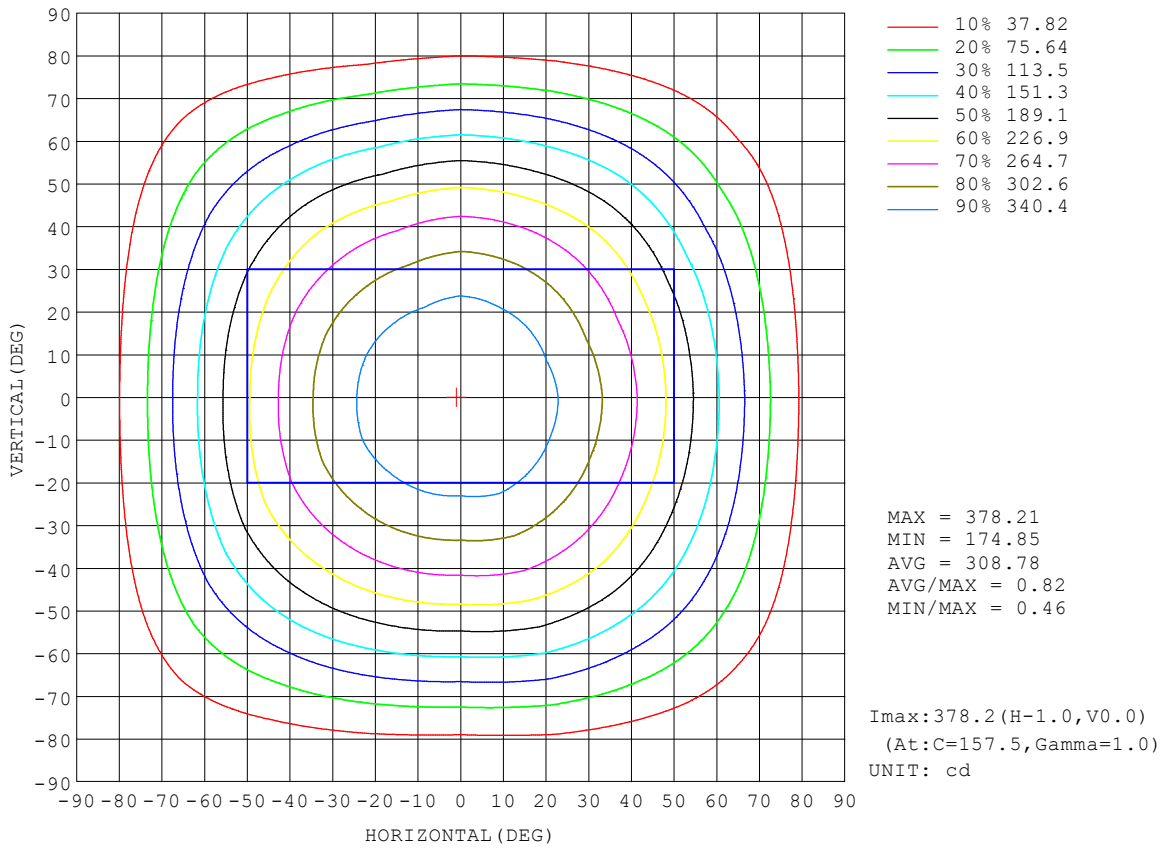


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Flux out:776.7 lm

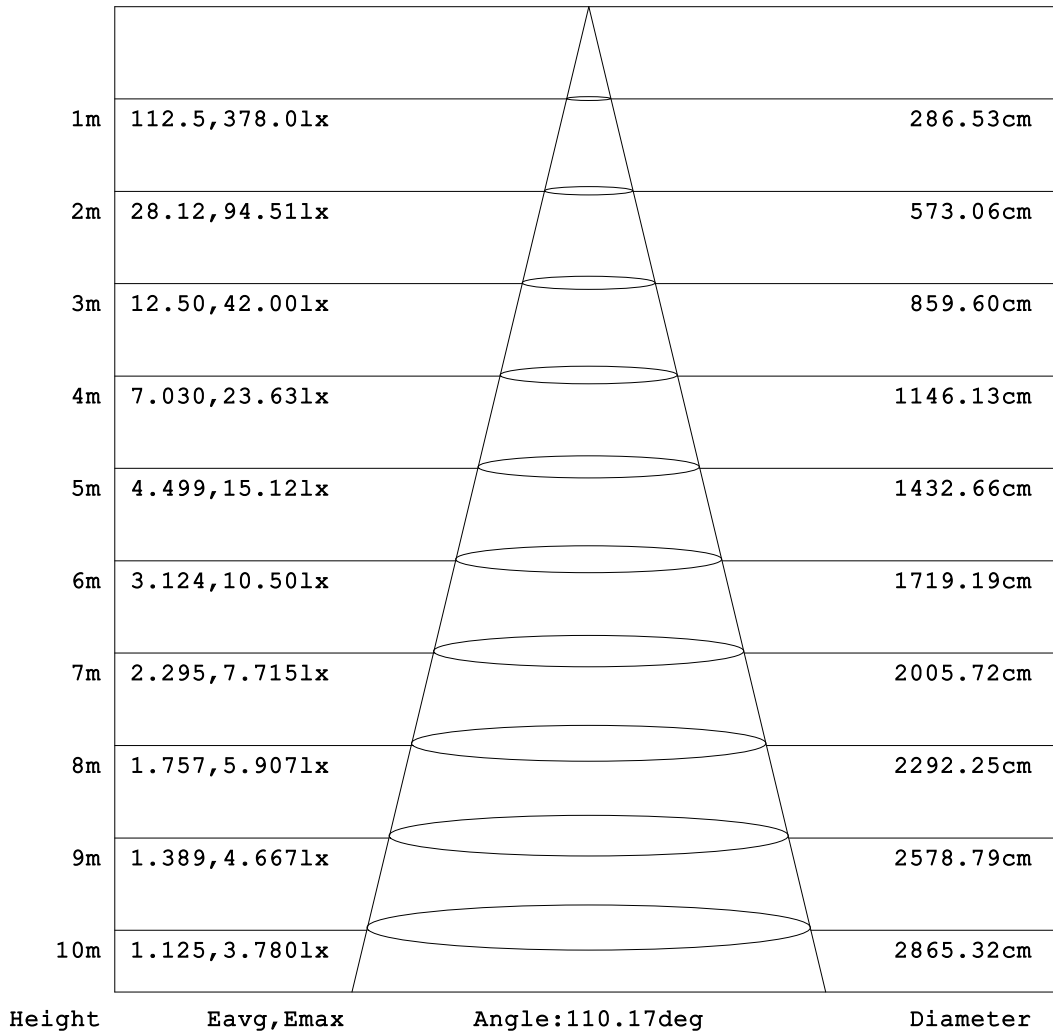


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

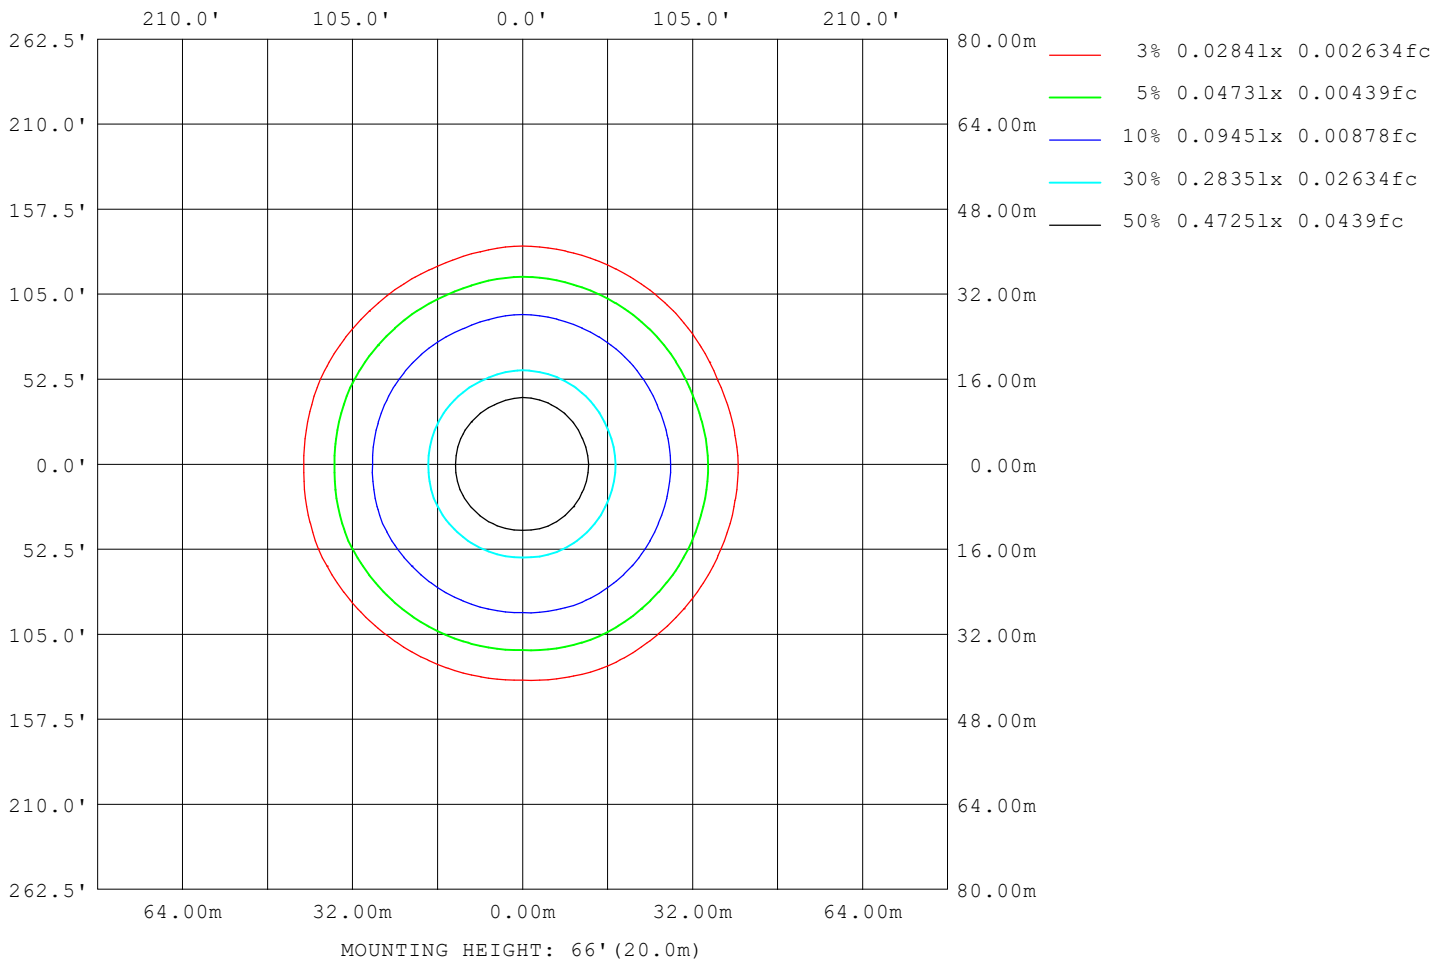

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2687
L_0~180 (75) av	2204
L_0~180 (85) av	1282
L_90~270 (65) av	2687
L_90~270 (75) av	2204
L_90~270 (85) av	1216
L_45 (65) av	2673
L_45 (75) av	2131
L_45 (85) av	1166

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

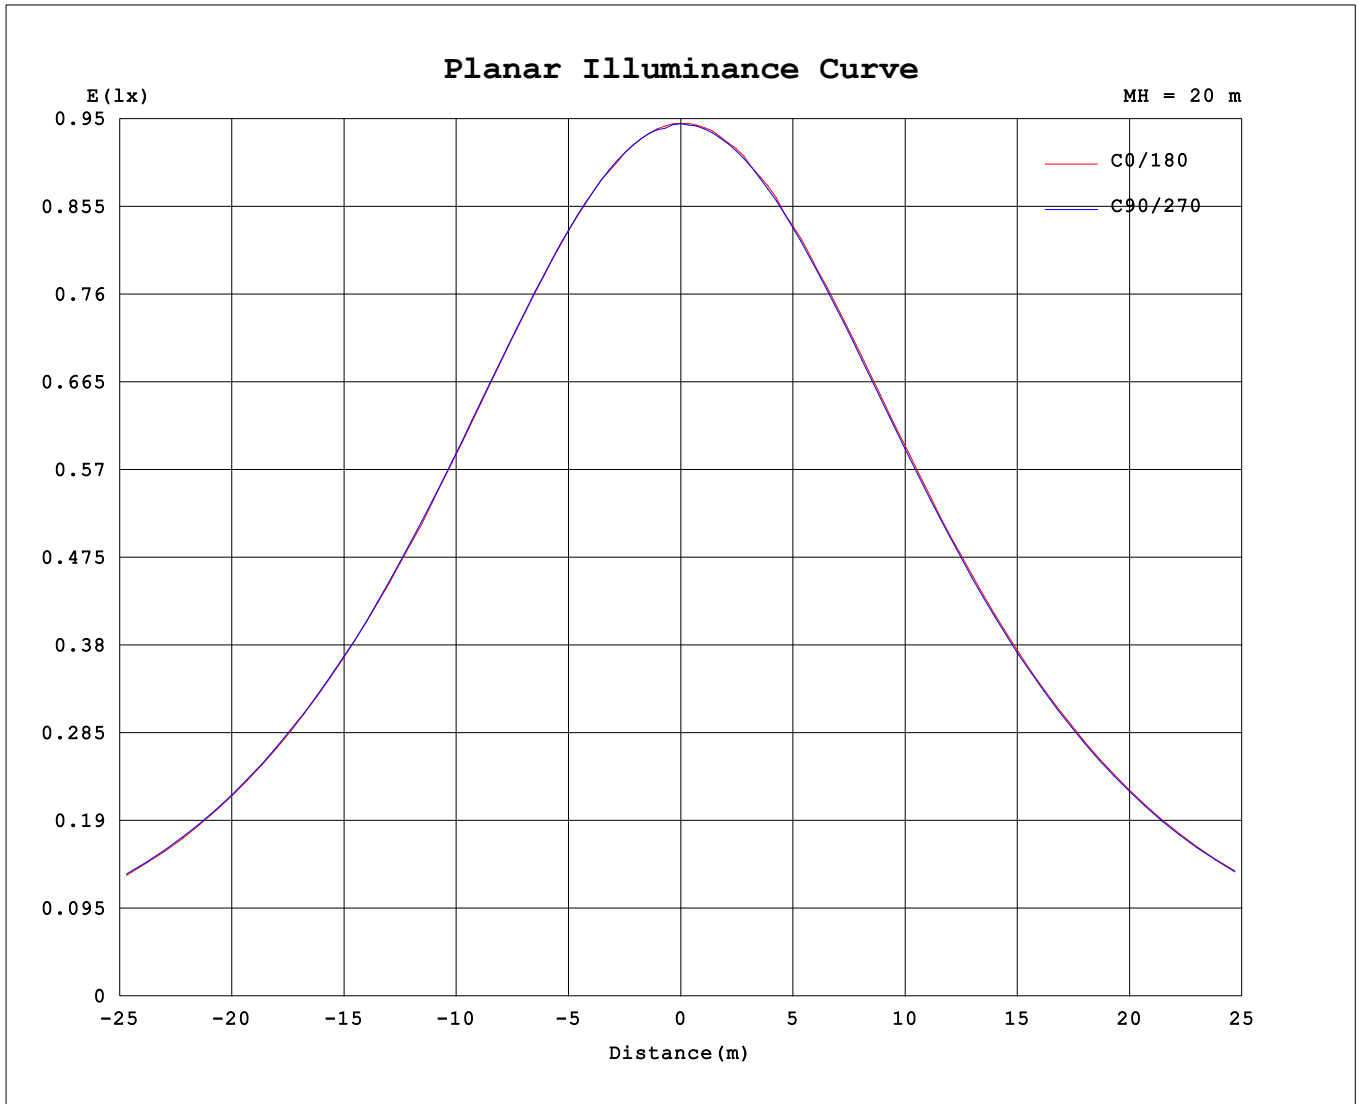

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test: U:119.84V I:0.1306A P:11.499W PF:0.7349 Freq:59.98Hz UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1046.03x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	378	378	378	378	378	378	378	378	378	378	378	378	378	378	378	378			
5	375	375	376	376	376	376	376	377	376	376	376	375	376	376	375	375			
10	370	369	371	372	370	371	372	373	371	371	371	370	371	370	369	368			
15	361	361	362	364	361	363	364	366	364	364	362	360	363	362	360	359			
20	348	349	351	352	349	350	352	355	352	352	350	348	351	350	348	346			
25	333	333	336	338	334	336	338	341	338	338	335	333	336	335	332	330			
30	314	315	318	320	316	319	320	324	320	320	317	315	319	316	314	311			
35	295	295	298	301	295	298	301	304	300	300	297	294	299	297	294	290			
40	272	272	275	278	273	276	278	282	278	278	274	271	276	274	270	267			
45	245	246	250	253	246	250	253	258	252	253	249	245	250	248	246	242			
50	216	217	223	225	218	220	225	232	223	225	223	216	222	219	217	213			
55	186	187	192	194	187	191	195	201	193	195	191	186	192	188	187	183			
60	155	156	159	163	156	159	163	169	162	163	158	154	161	157	155	149			
65	123	123	126	131	124	127	130	135	130	131	125	123	129	126	121	116			
70	91.4	90.8	92.7	97.3	91.7	94.4	96.8	101	97.0	97.8	92.1	90.7	96.7	93.8	88.6	84.1			
75	61.3	59.3	61.2	65.2	60.9	63.3	64.7	69.1	65.5	65.6	61.0	59.5	65.9	63.4	58.2	53.8			
80	34.0	31.6	33.3	36.5	32.8	35.4	36.2	39.9	37.2	37.0	33.4	31.9	37.6	35.7	31.2	27.7			
85	11.0	9.53	11.3	13.4	9.91	12.3	13.1	15.6	13.8	13.7	11.1	9.80	13.6	12.3	9.68	7.35			
90	0.41	0.40	0.39	0.55	0.40	0.40	0.43	0.76	0.28	0.24	0.25	0.26	0.48	0.32	0.27	0.28			

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 22.5DEG γ Interval: 1.0DEG
 Test Speed: HIGH Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Temperature: 25.3°C Humidity: 65.0%
 Operators: Test Distance: 3.090m [K=1.0000]
 Test Date: 2023-02-03 Remarks: