
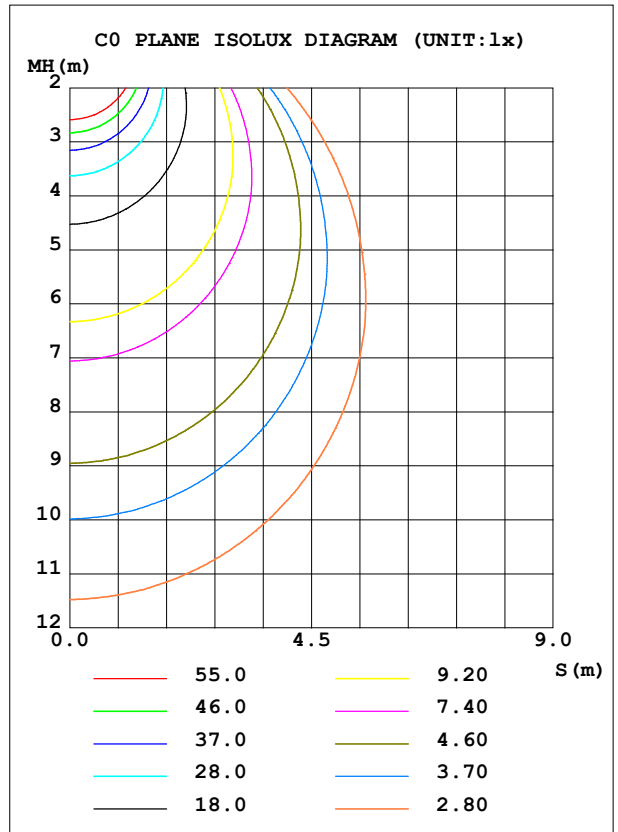


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELED-6-S12W-5CCT-WH-SQ-BF		Imax (cd)	366.1	S/MH (C0/180)	1.26
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1013.1	η UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	1013.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

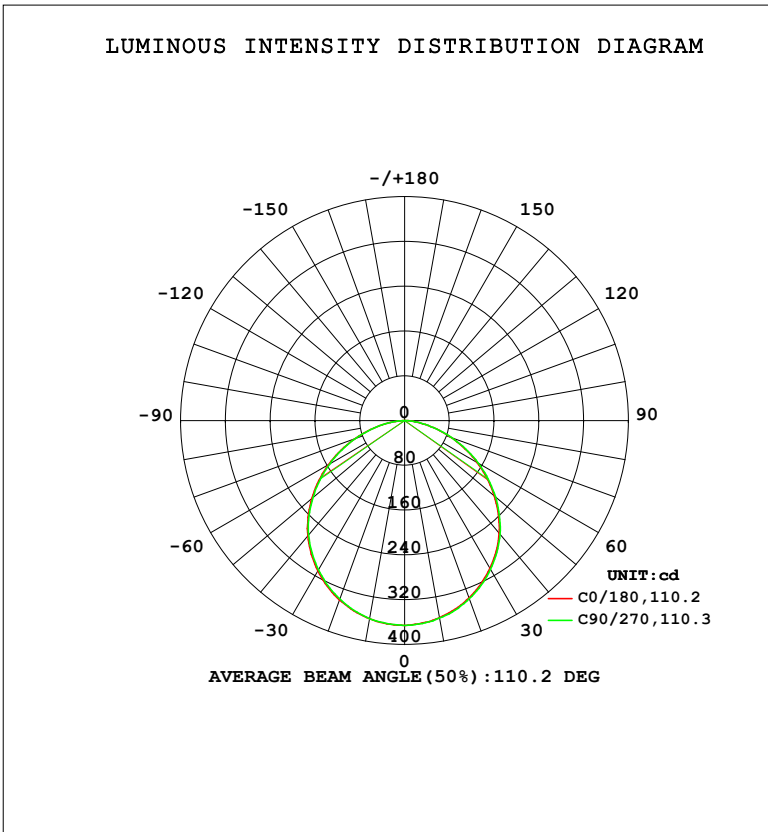

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	357.7	359.1	358.4	360.3	359.6	359.0	359.3	357.7	0- 10	34.58	34.58	3.41,3.41
20	337.1	339.1	338.7	341.7	340.9	339.5	339.1	336.8	10- 20	98.92	133.5	13.2,13.2
30	304.9	307.5	307.0	311.2	310.1	308.1	307.9	304.4	20- 30	149.6	283.1	27.9,27.9
40	263.1	265.7	265.4	270.2	269.1	266.5	266.9	261.9	30- 40	180.1	463.3	45.7,45.7
50	209.1	214.6	211.9	219.0	216.4	216.6	213.6	210.5	40- 50	186.0	649.3	64.1,64.1
60	149.8	153.3	152.0	159.0	156.8	154.5	154.3	148.8	50- 60	164.8	814.1	80.4,80.4
70	88.81	89.27	89.82	94.33	93.80	90.22	92.65	84.98	60- 70	120.8	934.9	92.3,92.3
80	32.99	31.90	33.09	35.51	35.96	33.08	35.84	29.62	70- 80	64.12	999.0	98.6,98.6
90	0.3896	0.3729	0.3850	0.4659	0.2642	0.2322	0.4409	0.2555	80- 90	14.07	1013	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

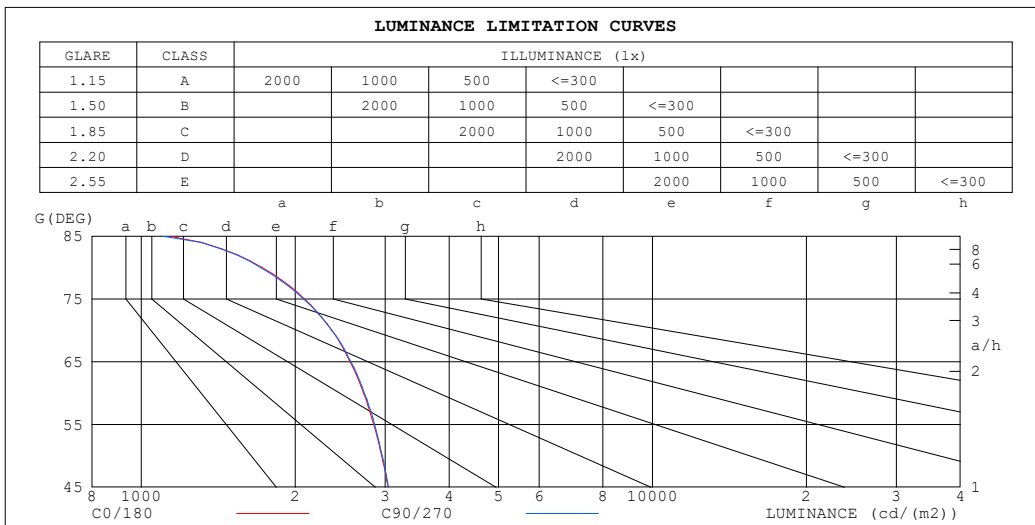


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1lx1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.73	.70
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.59
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.27	.38	.31	.27	.37	.31	.26	.25

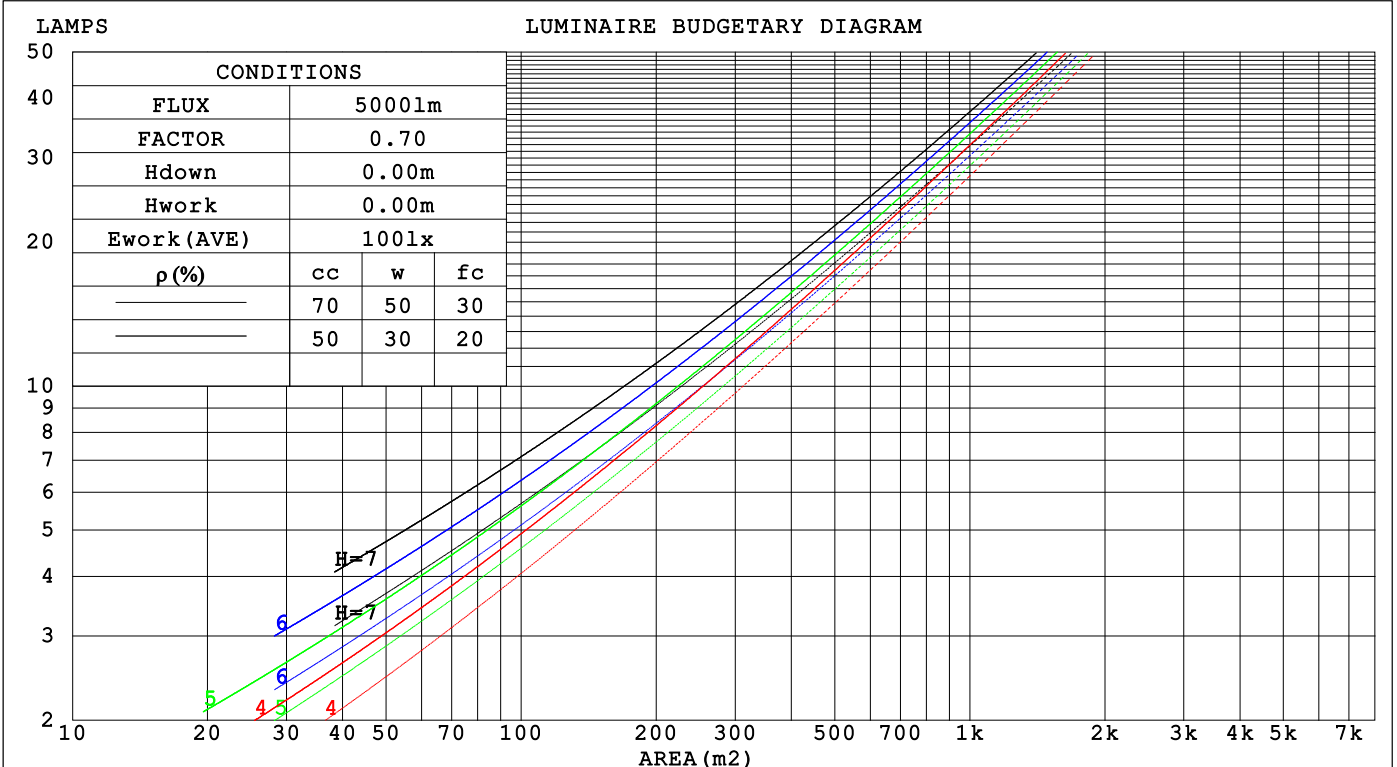

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.293	.167	.053	.280	.161	.051	.268	.154	.050	.256	.149	.048	
2.0	.285	.156	.048	.279	.154	.047	.267	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.265	.141	.042	.260	.139	.042	.250	.135	.041	.240	.132	.040	.231	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.176	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.085	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.111	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm										
NAME: LED-6-S12W-5CCT-WH-SQ-BF					TYPE:			WEIGHT:		
SPEC.: 5000K					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.5	18.0	16.7	18.2	18.4	16.6	18.1	16.8	18.3	18.5
3H	17.8	19.2	18.1	19.4	19.7	18.0	19.3	18.2	19.6	19.8
4H	18.3	19.6	18.6	19.9	20.1	18.4	19.8	18.8	20.0	20.3
6H	18.6	19.9	19.0	20.1	20.4	18.8	20.0	19.1	20.3	20.5
8H	18.7	19.9	19.0	20.2	20.5	18.8	20.0	19.2	20.3	20.6
12H	18.7	19.9	19.1	20.2	20.5	18.8	20.0	19.2	20.3	20.6
4H 2H	17.0	18.4	17.4	18.6	18.9	17.1	18.5	17.4	18.7	19.0
3H	18.6	19.7	18.9	20.0	20.3	18.7	19.8	19.0	20.1	20.4
4H	19.2	20.2	19.5	20.5	20.9	19.3	20.4	19.7	20.7	21.0
6H	19.6	20.5	20.0	20.9	21.2	19.7	20.7	20.1	21.0	21.4
8H	19.7	20.6	20.1	20.9	21.3	19.8	20.7	20.3	21.1	21.5
12H	19.7	20.5	20.2	20.9	21.3	19.9	20.7	20.3	21.1	21.5
8H 4H	19.4	20.2	19.8	20.6	21.0	19.5	20.4	19.9	20.7	21.1
6H	19.9	20.6	20.3	21.0	21.5	20.0	20.8	20.5	21.2	21.6
8H	20.1	20.7	20.5	21.1	21.6	20.2	20.9	20.7	21.3	21.7
12H	20.2	20.7	20.7	21.2	21.6	20.3	20.9	20.8	21.3	21.8
12H 4H	19.4	20.2	19.8	20.6	21.0	19.5	20.3	19.9	20.7	21.1
6H	19.9	20.6	20.4	21.0	21.4	20.1	20.7	20.5	21.1	21.6
8H	20.1	20.7	20.6	21.1	21.6	20.3	20.8	20.8	21.3	21.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1013 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	99	92	86	97	90	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	87	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

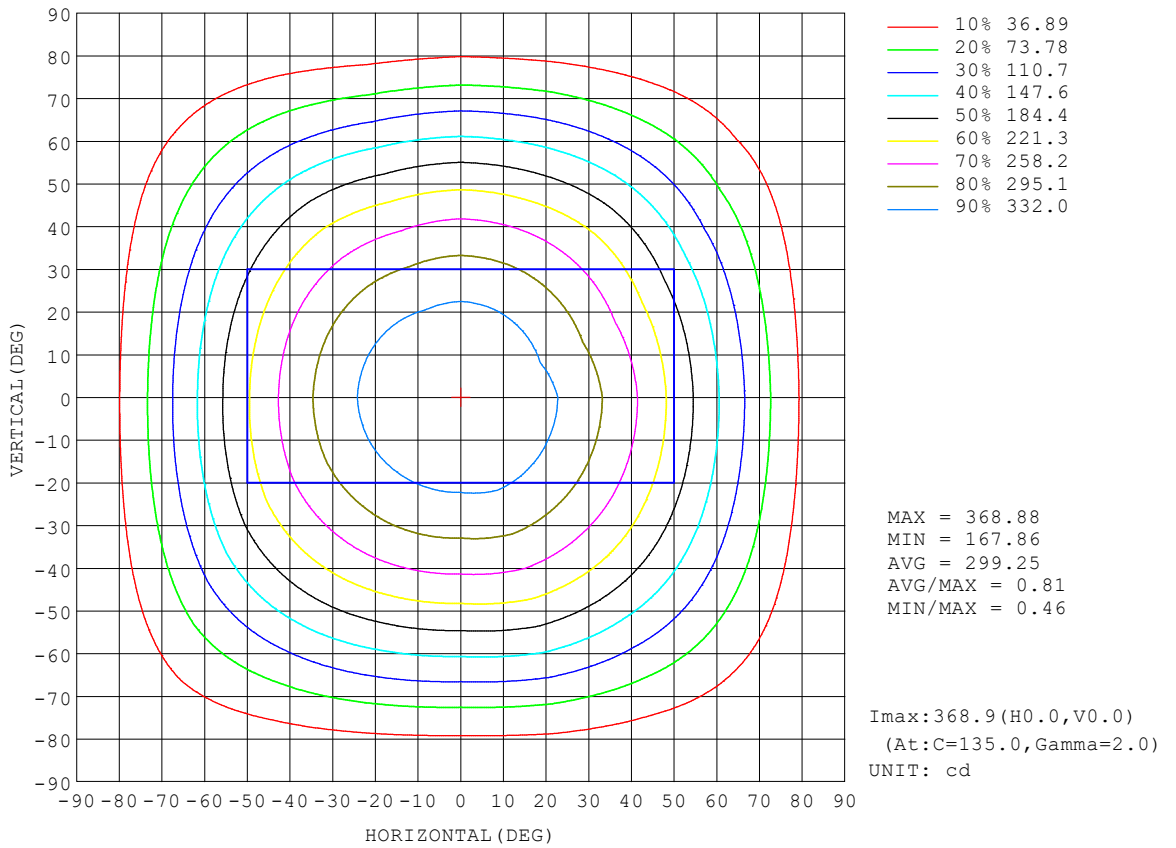


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

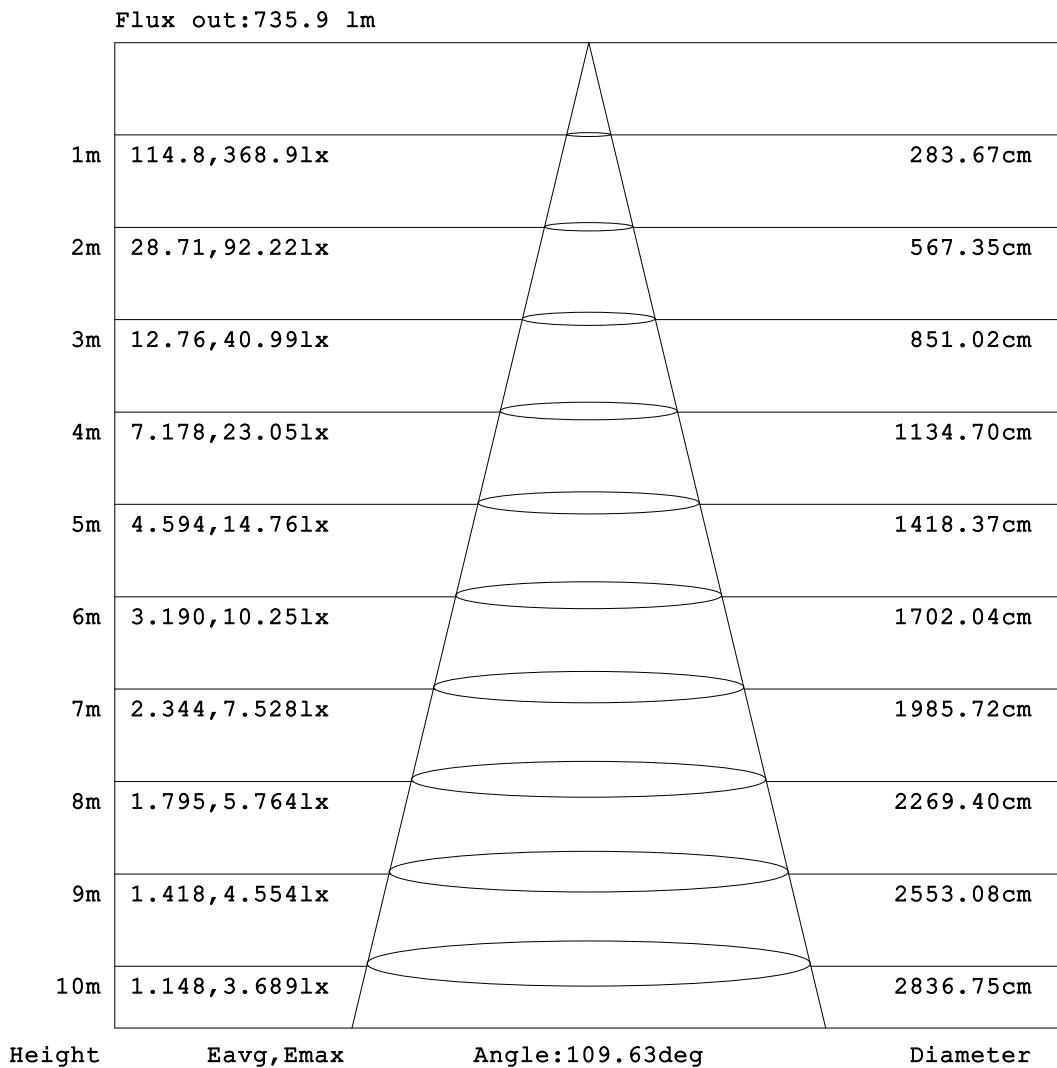


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

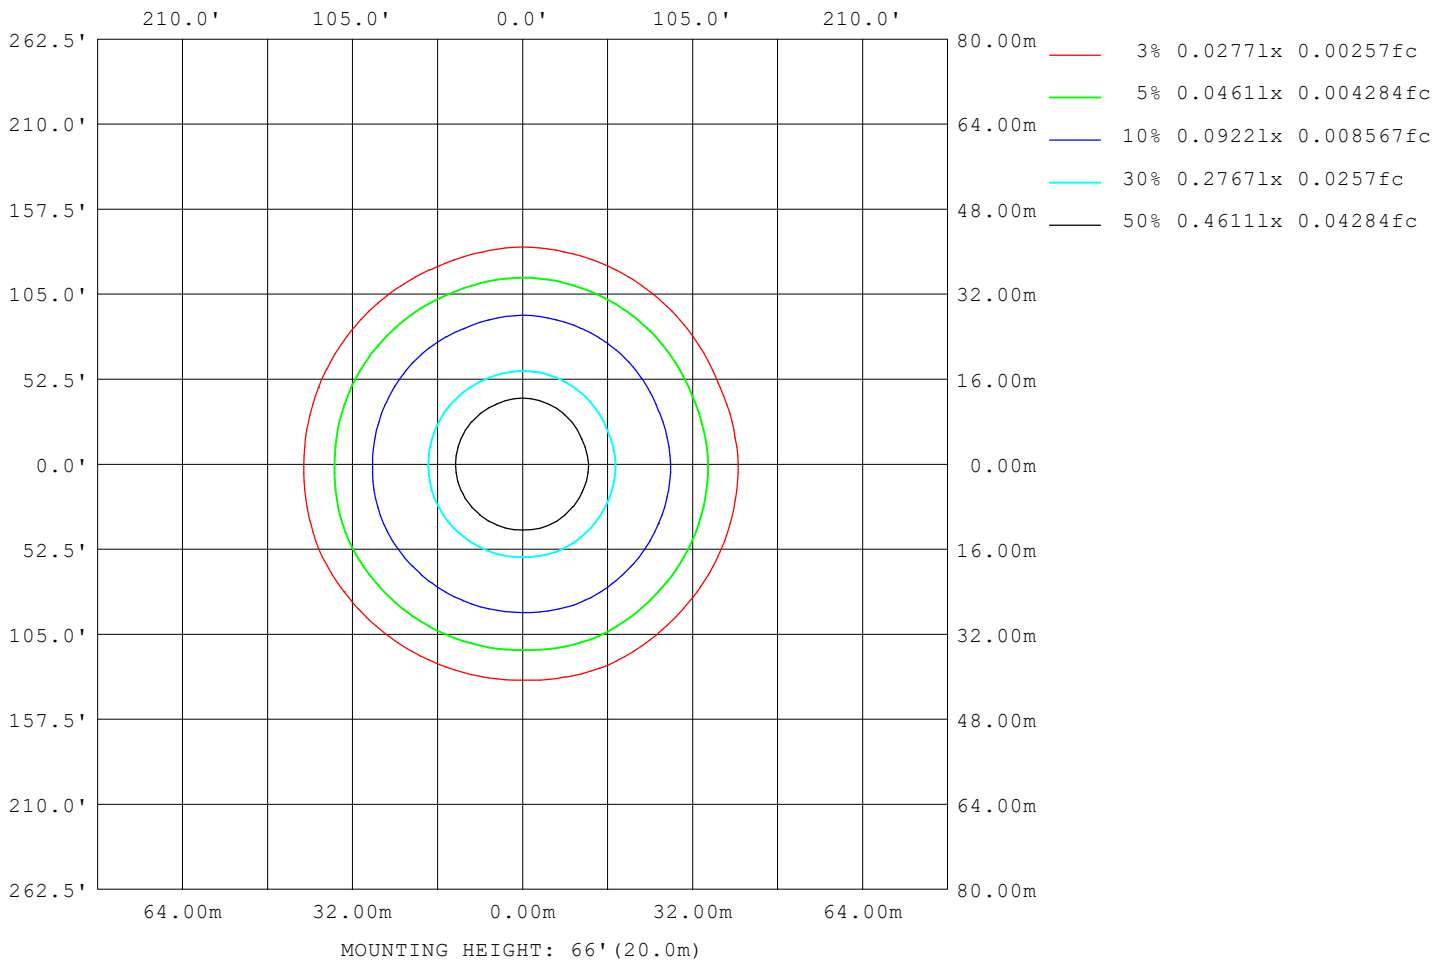

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2603
L_0~180 (75) av	2135
L_0~180 (85) av	1265
L_90~270 (65) av	2602
L_90~270 (75) av	2133
L_90~270 (85) av	1227
L_45 (65) av	2590
L_45 (75) av	2064
L_45 (85) av	1132

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

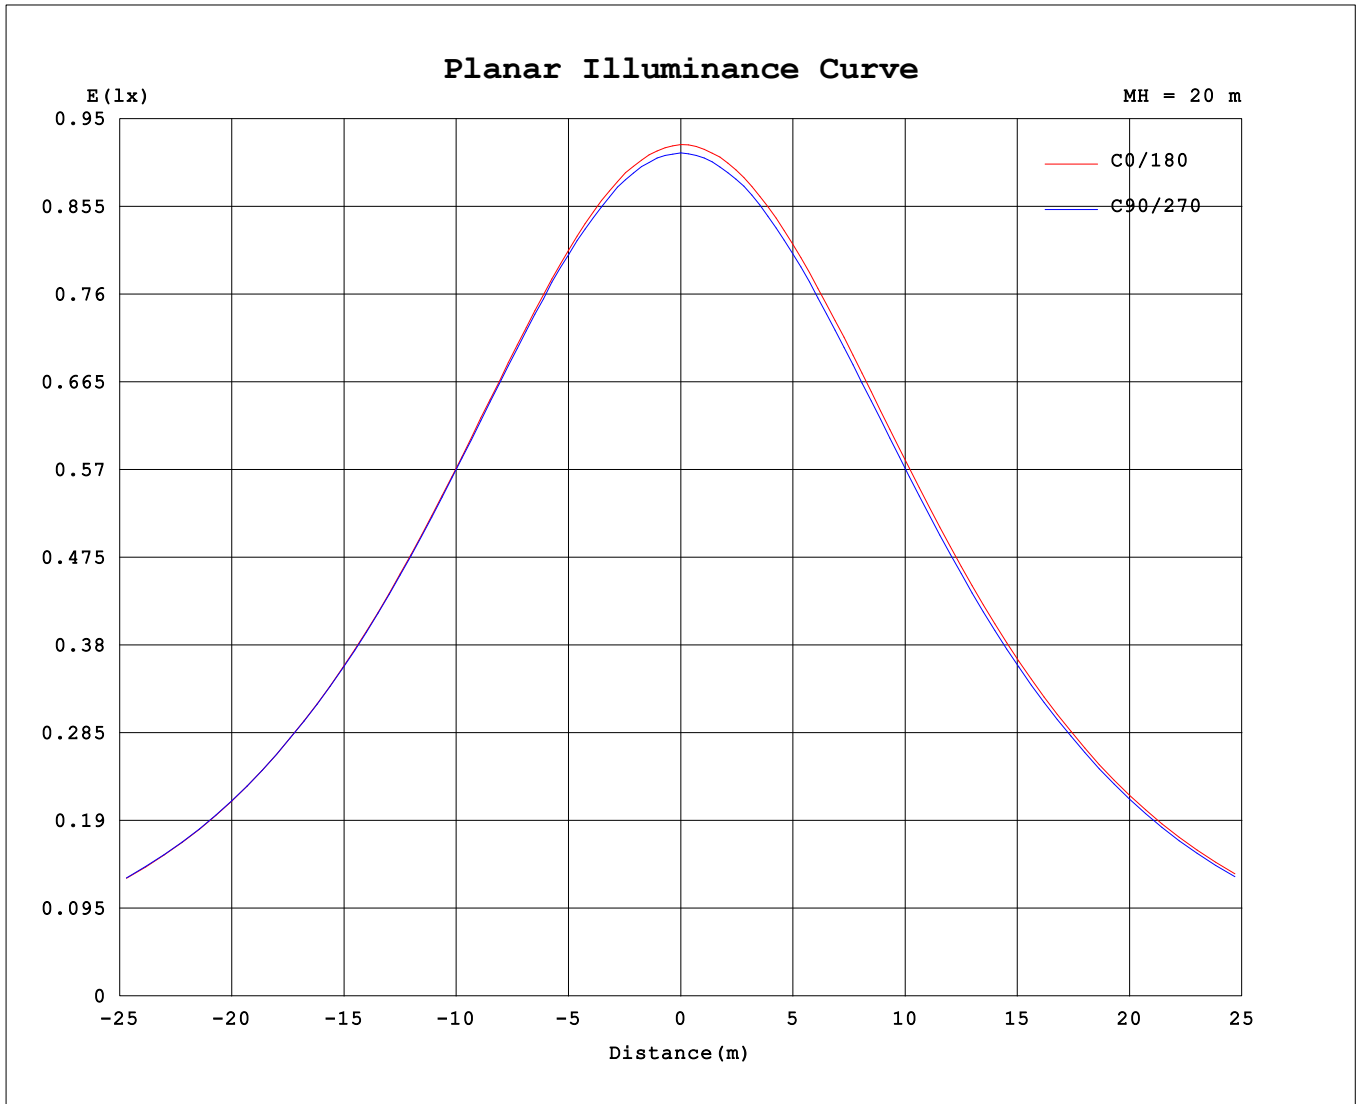

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-02-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.90V I:0.1348A P:11.949W PF:0.7393 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1013.1x1 lm		
NAME: LED-6-S12W-5CCT-WH-SQ-BF	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366	366			
5	363	363	364	364	364	364	365	365	364	364	364	364	364	364	363	363			
10	358	358	359	360	358	359	360	361	360	359	359	358	359	358	358	357			
15	349	349	351	352	351	351	353	354	352	351	351	349	351	350	349	347			
20	337	338	339	341	339	340	342	344	341	340	340	337	339	338	337	335			
25	322	323	325	327	324	326	328	330	327	327	325	322	325	324	322	319			
30	305	306	308	310	307	308	311	314	310	309	308	305	308	307	304	302			
35	285	286	288	291	287	289	292	295	291	290	289	285	288	287	284	281			
40	263	264	266	269	265	267	270	274	269	268	267	263	267	265	262	259			
45	237	240	242	245	240	242	246	250	244	244	243	238	242	239	238	234			
50	209	211	215	218	212	214	219	224	216	216	217	210	214	211	210	205			
55	180	182	185	188	182	185	190	195	187	187	187	181	185	182	181	176			
60	150	152	153	158	152	155	159	164	157	156	155	150	154	152	149	145			
65	119	120	121	126	121	123	126	132	125	124	122	119	124	121	117	113			
70	88.8	88.6	89.3	93.1	89.8	91.9	94.3	99.2	93.8	91.9	90.2	87.4	92.7	90.7	85.0	81.2			
75	59.5	58.5	58.8	62.2	59.8	61.7	63.2	67.8	63.3	60.9	60.0	57.4	62.9	61.0	55.5	51.9			
80	33.0	32.0	31.9	34.7	33.1	34.2	35.5	39.3	36.0	33.6	33.1	30.8	35.8	33.7	29.6	26.5			
85	10.9	10.7	10.6	12.5	10.7	11.8	13.0	15.6	13.6	11.5	11.3	9.62	13.1	11.4	8.99	6.86			
90	0.39	0.38	0.37	0.47	0.38	0.38	0.47	0.79	0.26	0.23	0.23	0.25	0.44	0.27	0.26	0.27			

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3℃	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2023-02-03	Remarks: