
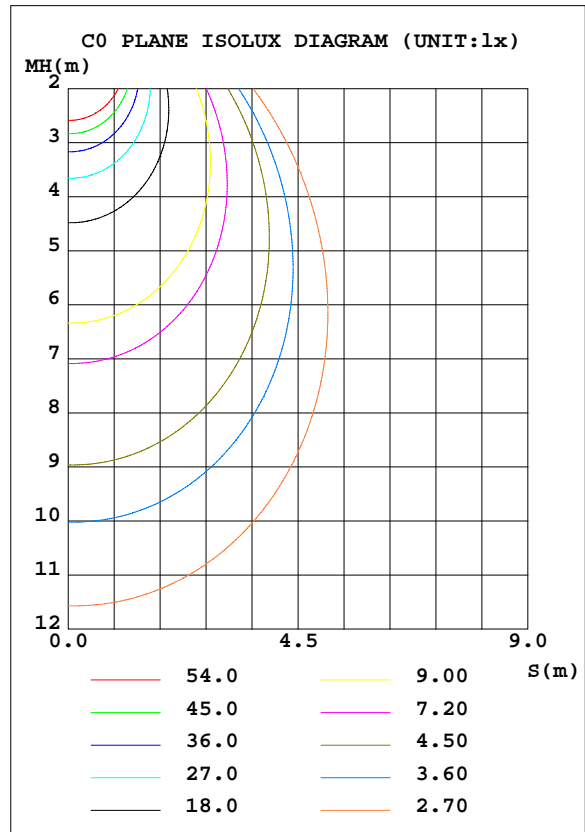


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.14 lm/W			
MODEL	LY4S 30K	I _{max} (cd)	361.6	S/MH(C0/180)	1.11
NOMINAL POWER(W)	0	LOR(%)	100.0	S/MH(C90/270)	1.12
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	774.67	η UP, DN(C0-180)	0.0,50.5
NOMINAL FLUX(lm)	774.671	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.25

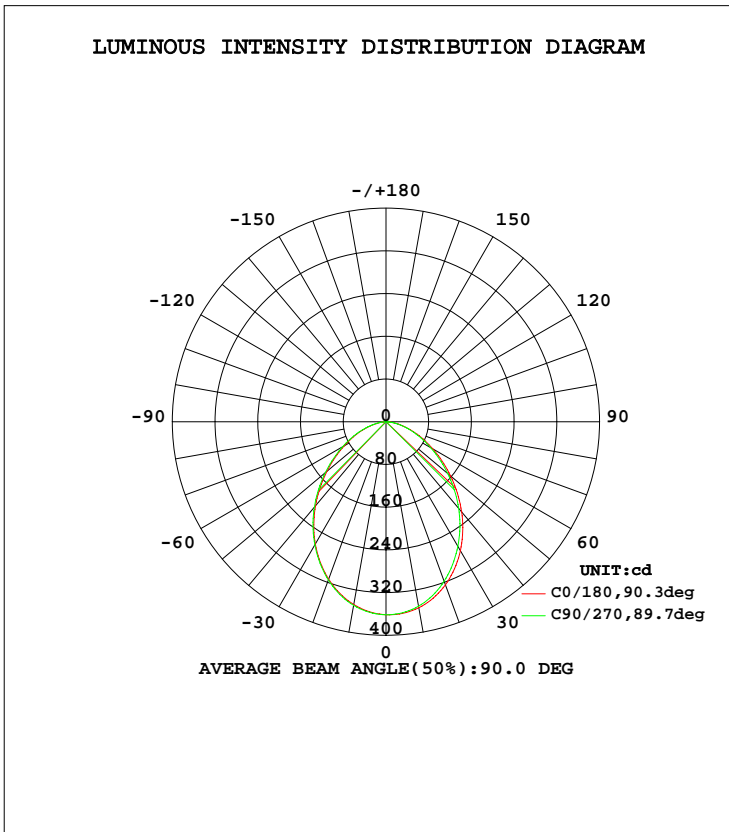


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

**ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES**

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	353.8	353.1	350.7	348.1	347.7	347.4	349.2	351.9	0- 10	33.96	33.96	4.38,4.38
20	325.1	323.1	318.0	314.1	313.9	312.6	315.4	321.4	10- 20	94.68	128.6	16.6,16.6
30	278.7	274.5	269.3	263.1	264.7	261.3	266.6	272.8	20- 30	135.6	264.3	34.1,34.1
40	220.5	215.1	211.7	203.3	205.4	201.4	208.8	213.7	30- 40	150.0	414.2	53.5,53.5
50	157.9	153.6	151.1	143.1	144.5	141.4	148.3	152.5	40- 50	138.2	552.4	71.3,71.3
60	100.9	98.26	96.15	90.33	90.58	88.73	93.84	97.27	50- 60	108.0	660.4	85.3,85.3
70	54.83	53.65	52.00	48.25	47.96	47.10	50.28	52.91	60- 70	70.93	731.4	94.4,94.4
80	20.51	20.34	19.13	17.16	16.27	16.03	17.44	19.37	70- 80	35.42	766.8	99,99
90	0.0420	0.0557	0.0104	0.0005	0	0	0	0	80- 90	7.897	774.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0007	774.7	100,100
110	0	0	0	0	0	0	0	0	100-110	0	774.7	100,100
120	0	0	0	0	0	0	0	0	110-120	0	774.7	100,100
130	0	0	0	0	0	0	0	0	120-130	0	774.7	100,100
140	0	0	0	0	0	0	0	0	130-140	0	774.7	100,100
150	0.0009	0	0	0.0005	0	0	0.0084	0.0010	140-150	0.0000	774.7	100,100
160	0	0	0	0.0025	0	0.0006	0.0024	0	150-160	0.0004	774.7	100,100
170	0.0006	0	0.0017	0	0.0049	0.0052	0.0502	0	160-170	0.0006	774.7	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0003	774.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

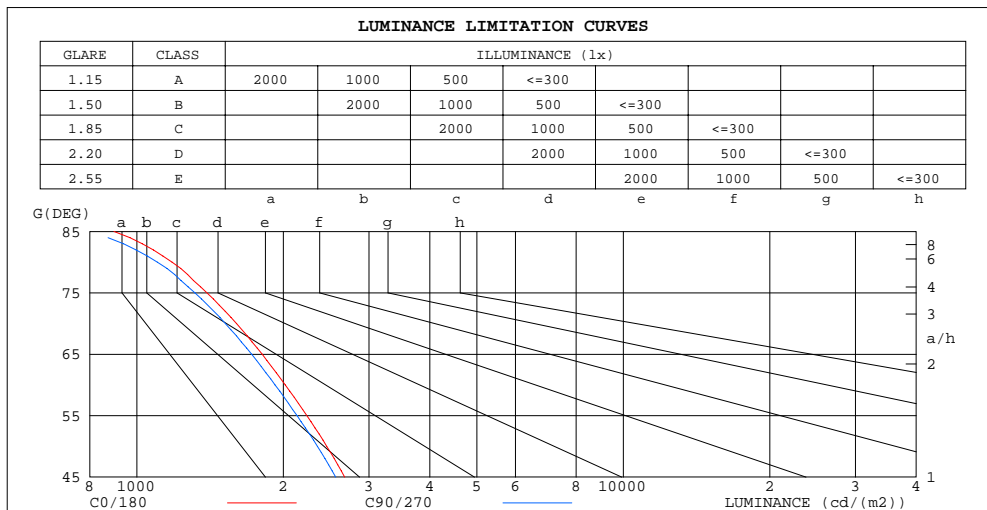

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	898	793
80	1181	1102
75	1394	1317
70	1603	1521
65	1810	1721
60	2018	1923
55	2236	2135
50	2457	2350
45	2674	2563


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.98	1.03	1.00	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.74	.69	.66	.64
4.0	.74	.66	.60	.73	.66	.60	.71	.64	.59	.68	.63	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.55	.51	.49
6.0	.61	.52	.46	.60	.52	.46	.58	.51	.46	.57	.50	.45	.55	.49	.45	.43
7.0	.56	.47	.41	.55	.47	.41	.53	.46	.41	.52	.45	.41	.51	.45	.40	.39
8.0	.51	.43	.37	.50	.43	.37	.49	.42	.37	.48	.41	.37	.47	.41	.37	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.43	.38	.33	.32
10.0	.44	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.31	.40	.35	.30	.29

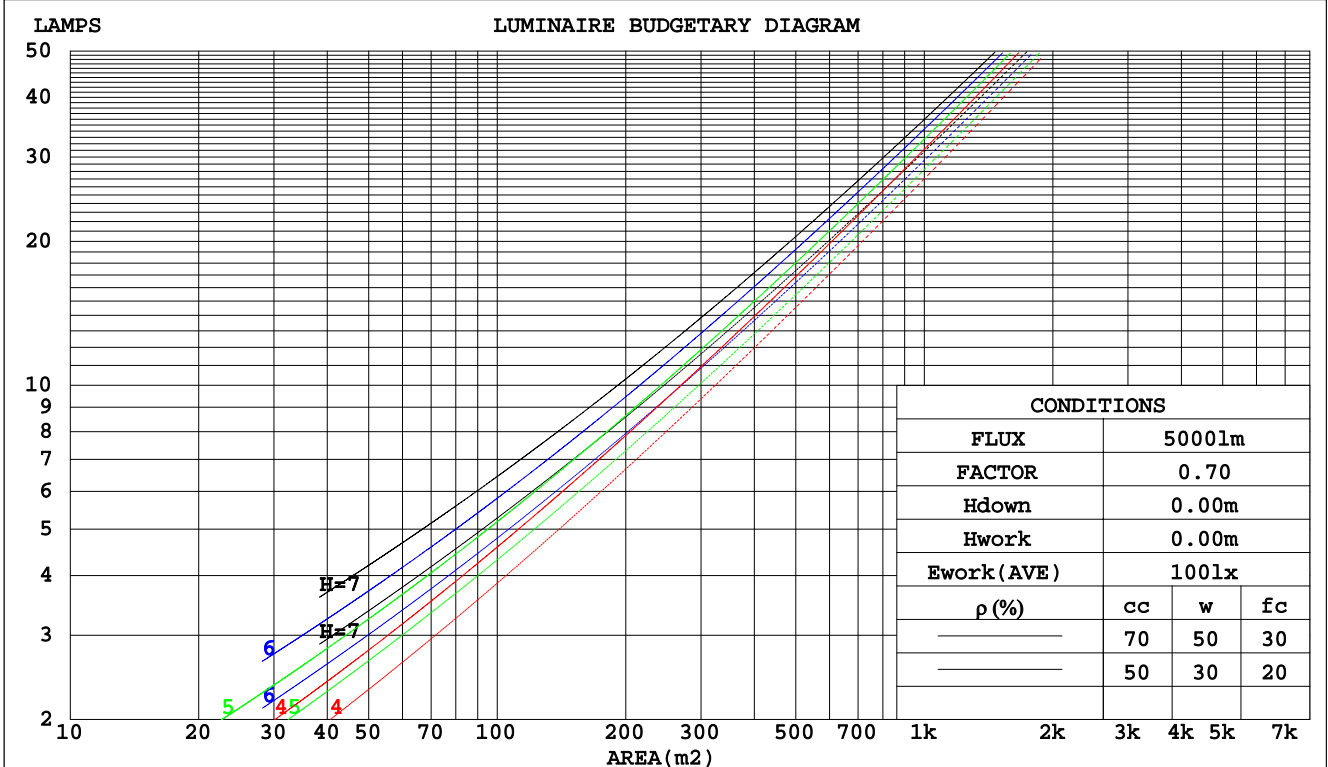

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.671x1 lm									
NAME:					TYPE:			WEIGHT:	
SPEC.:					DIM.:			SERIAL No.:	
MFR.:					SUR.:			PROTECTION ANGLE:	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.274	.156	.049	.267	.153	.048	.254	.146	.047	.242	.140	.045	.231	.134	.043	
2.0	.262	.144	.044	.256	.141	.043	.245	.136	.042	.234	.131	.041	.224	.127	.040	
3.0	.246	.131	.039	.240	.129	.039	.230	.125	.038	.221	.121	.037	.212	.118	.036	
4.0	.229	.119	.035	.224	.117	.035	.215	.114	.034	.207	.111	.034	.200	.108	.033	
5.0	.214	.109	.032	.209	.107	.031	.201	.105	.031	.194	.102	.030	.187	.100	.030	
6.0	.199	.100	.029	.196	.099	.028	.189	.097	.028	.182	.095	.028	.176	.093	.028	
7.0	.187	.092	.026	.183	.091	.026	.177	.090	.026	.171	.088	.026	.166	.086	.025	
8.0	.175	.086	.024	.172	.085	.024	.167	.083	.024	.162	.082	.024	.157	.080	.023	
9.0	.165	.080	.022	.162	.079	.022	.157	.078	.022	.153	.077	.022	.148	.075	.022	
10.0	.156	.075	.021	.153	.074	.021	.149	.073	.021	.145	.072	.020	.141	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.047	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.160	.114	.078	.137	.098	.067	.094	.068	.047	.054	.040	.028	.017	.013	.009	
4.0	.152	.101	.061	.130	.087	.053	.090	.061	.038	.052	.035	.022	.017	.012	.007	
5.0	.144	.090	.050	.124	.078	.043	.085	.054	.031	.050	.032	.018	.016	.010	.006	
6.0	.137	.081	.041	.118	.070	.036	.082	.049	.025	.047	.029	.015	.015	.009	.005	
7.0	.131	.074	.035	.113	.064	.030	.078	.045	.022	.045	.027	.013	.015	.009	.004	
8.0	.125	.069	.030	.107	.059	.026	.074	.042	.019	.043	.025	.011	.014	.008	.004	
9.0	.119	.064	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.008	.003	
10.0	.114	.059	.023	.098	.052	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.4	16.8	15.6	17.0	17.2	15.2	16.6	15.5	16.8	17.0
3H	16.4	17.7	16.7	18.0	18.2	16.2	17.5	16.5	17.8	18.0
4H	16.8	18.1	17.1	18.3	18.6	16.6	17.8	16.9	18.1	18.3
6H	17.1	18.2	17.4	18.5	18.8	16.9	18.0	17.2	18.3	18.5
8H	17.2	18.3	17.5	18.6	18.8	16.9	18.0	17.2	18.3	18.6
12H	17.2	18.3	17.5	18.5	18.8	16.9	18.0	17.3	18.3	18.6
4H 2H	15.8	17.0	16.1	17.3	17.5	15.6	16.9	16.0	17.1	17.4
3H	17.0	18.1	17.4	18.4	18.7	16.9	17.9	17.2	18.2	18.5
4H	17.6	18.5	17.9	18.8	19.2	17.4	18.3	17.7	18.7	19.0
6H	17.9	18.8	18.3	19.1	19.5	17.7	18.6	18.1	18.9	19.3
8H	18.0	18.8	18.4	19.2	19.6	17.8	18.6	18.2	19.0	19.4
12H	18.1	18.8	18.5	19.2	19.6	17.9	18.6	18.3	19.0	19.4
8H 4H	17.7	18.5	18.1	18.9	19.3	17.5	18.3	17.9	18.7	19.1
6H	18.2	18.9	18.6	19.3	19.7	18.0	18.7	18.5	19.1	19.5
8H	18.4	19.0	18.8	19.4	19.8	18.2	18.8	18.6	19.2	19.6
12H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
12H 4H	17.7	18.4	18.1	18.8	19.2	17.5	18.3	18.0	18.7	19.1
6H	18.2	18.8	18.7	19.2	19.7	18.0	18.6	18.5	19.1	19.5
8H	18.4	18.9	18.9	19.4	19.9	18.2	18.7	18.7	19.2	19.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				
2.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				

CIE Pub.117 Corrected 774.7 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.9)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	52	45	62	52	45	61	51	45	39
0.80	73	62	55	72	62	55	70	61	55	48
1.00	81	71	64	80	70	64	77	71	63	57
1.25	87	78	72	86	77	71	83	76	70	64
1.50	92	83	77	90	82	77	88	81	75	69
2.00	98	91	85	96	89	84	93	87	83	75
2.50	102	95	89	100	93	88	96	91	87	79
3.00	105	99	94	102	97	93	99	94	90	82
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Conical surface Flux(90deg):

486.22 lm
%lum = 62.8%
%lamp = 62.8%

Conical surface Flux(120deg):

660.42 lm
%lum = 85.3%
%lamp = 85.3%

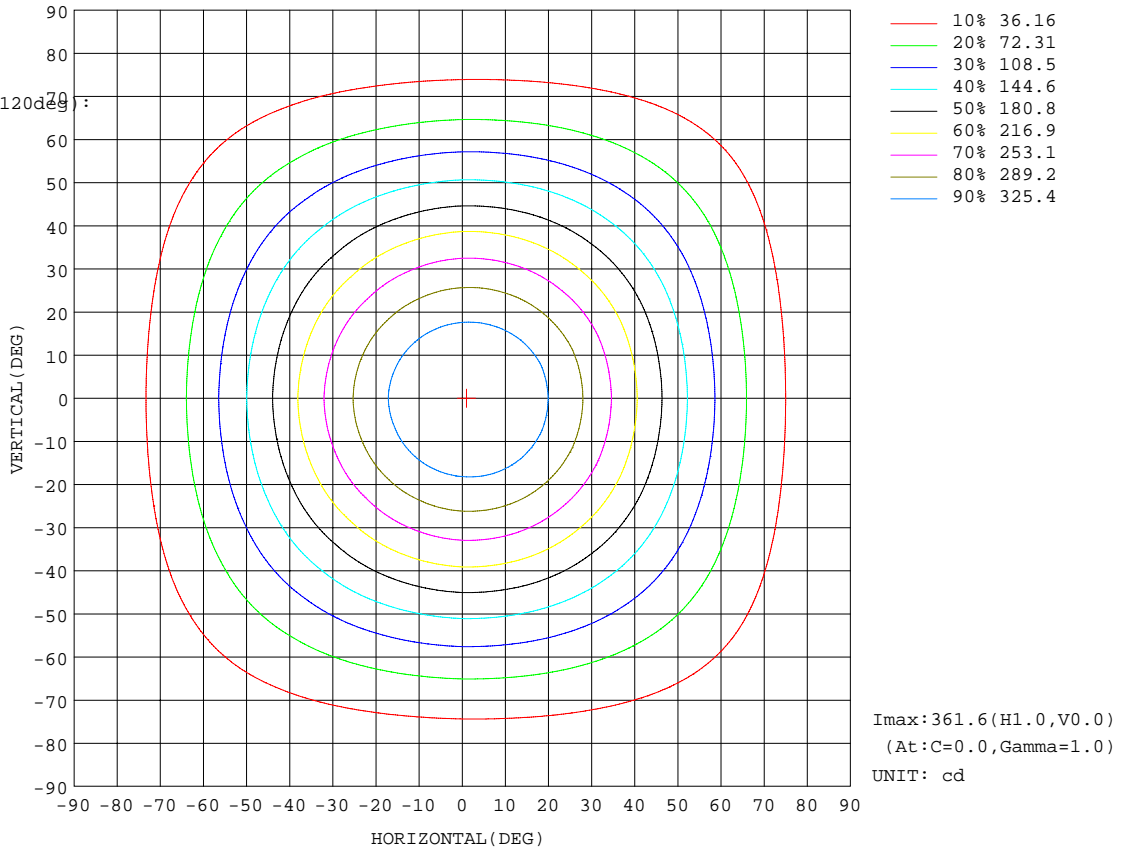


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: L/Y
Test Date: 2016-03-11

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 1.490m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

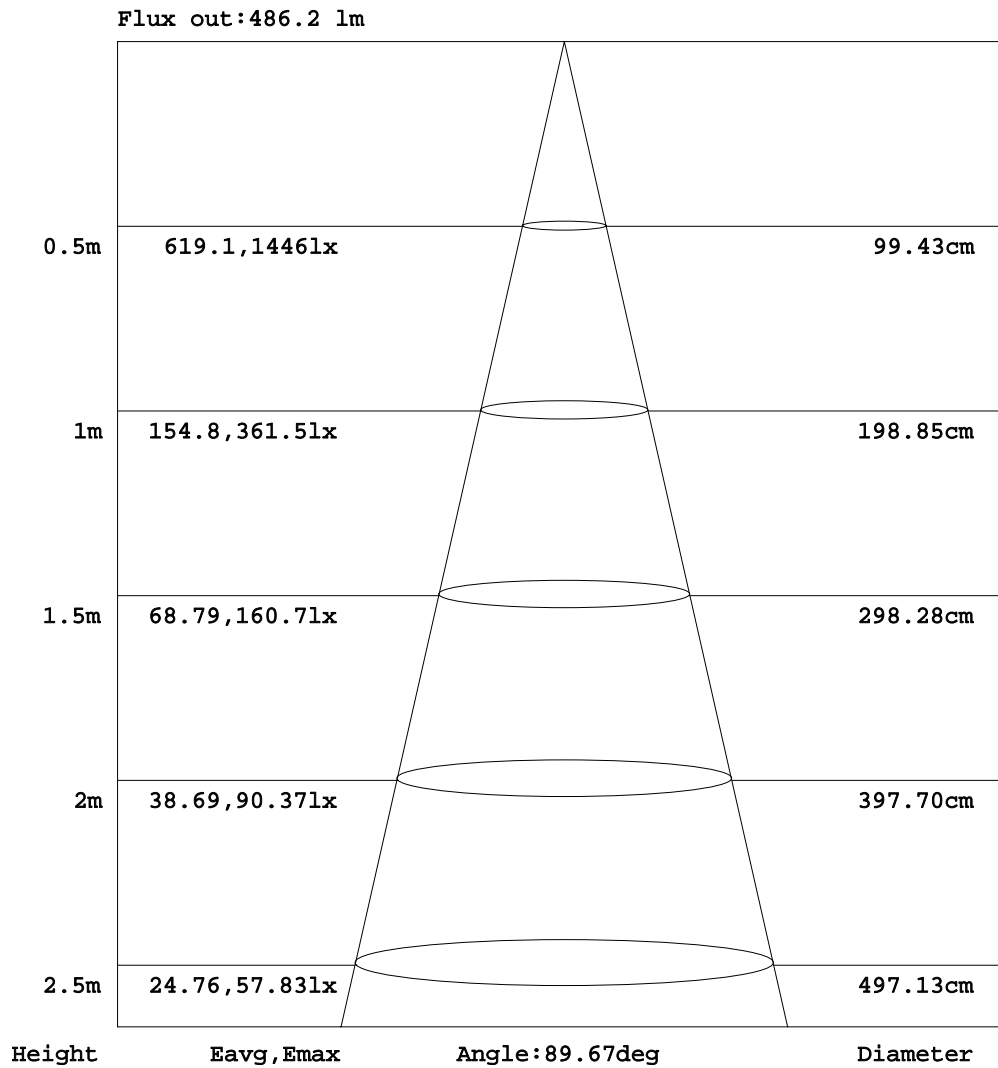


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

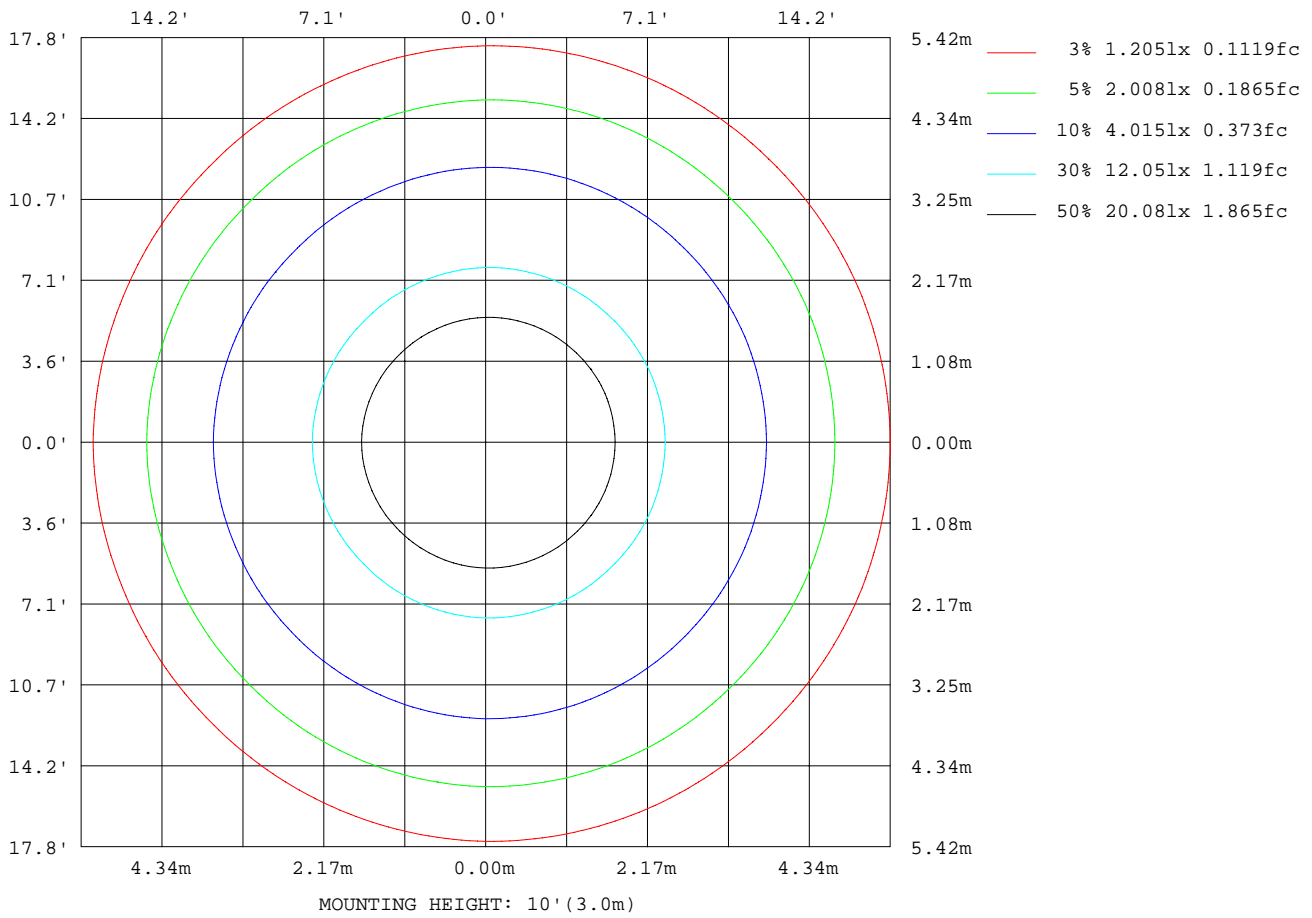

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.67lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	1707
L_0~180(75)av	1290
L_0~180(85)av	741
L_90~270(65)av	1696
L_90~270(75)av	1285
L_90~270(85)av	723
L_45(65)av	1672
L_45(75)av	1271
L_45(85)av	742

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

Planar Illuminance Curve

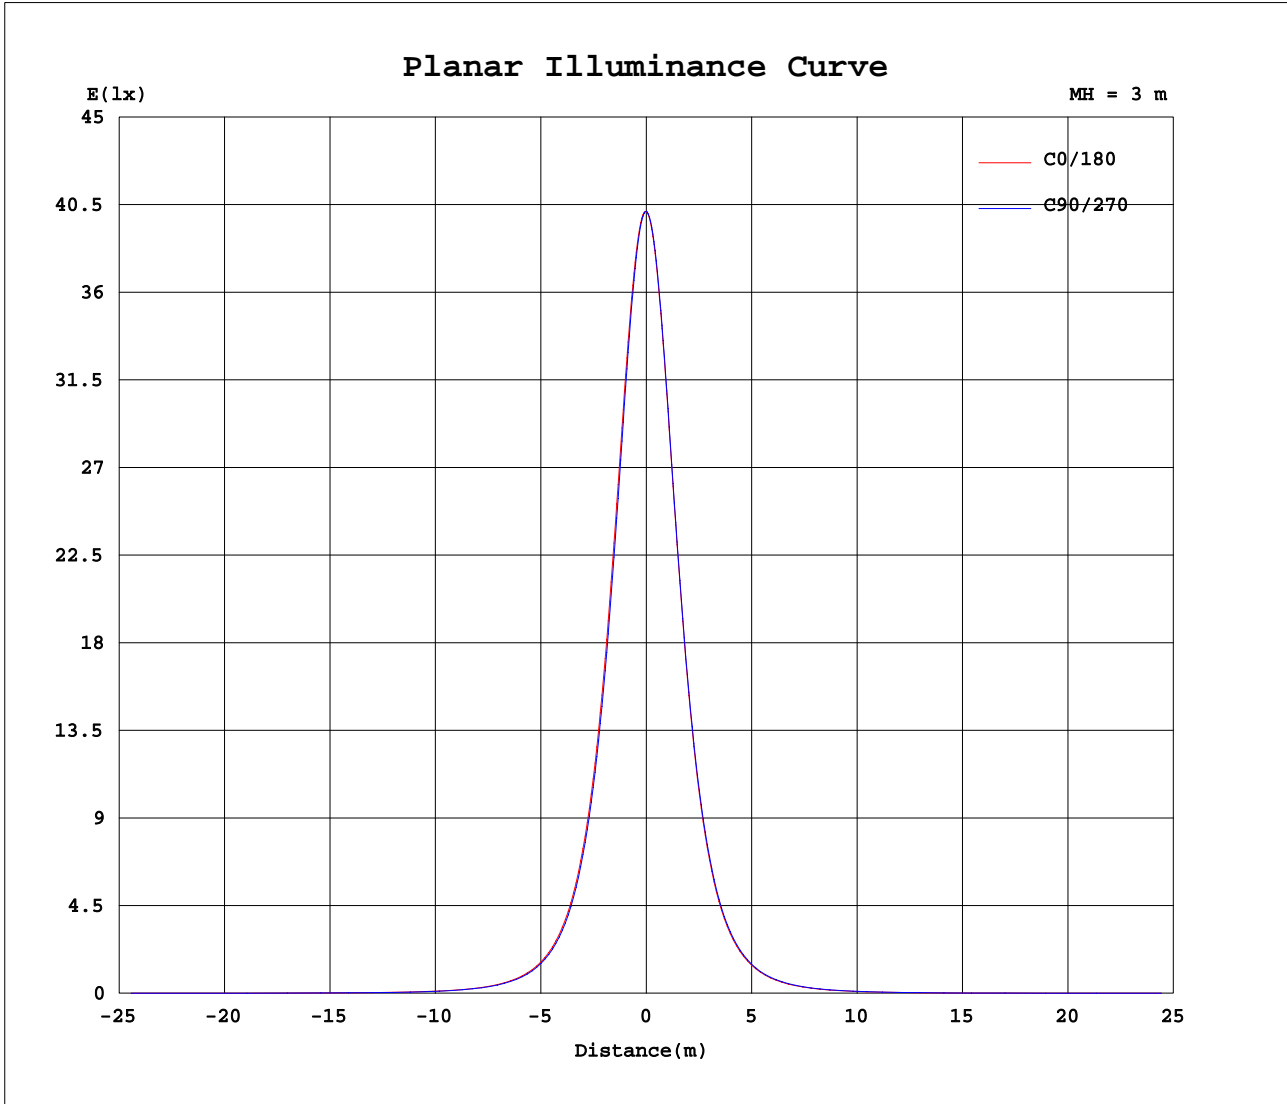

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: L/Y
Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 1.490m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0974A P:11.54W PF:0.9862 Lamp Flux:774.671x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	361	361	361	361	361	361	361	361	361	361	361	361	361	361	361	361			
5	360	360	360	360	359	358	357	357	357	357	357	358	358	359	359	360			
10	354	354	353	352	351	349	348	348	348	347	347	348	349	350	352	353			
15	342	342	341	339	337	335	334	333	333	332	332	333	335	337	339	342			
20	325	325	323	321	318	316	314	313	314	313	313	313	315	318	321	324			
25	304	303	301	298	295	292	290	290	291	289	288	290	292	296	299	303			
30	279	278	274	272	269	266	263	263	265	263	261	263	267	270	273	277			
35	251	249	246	244	241	237	234	234	236	234	232	234	239	241	244	249			
40	220	219	215	214	212	207	203	203	205	203	201	204	209	211	214	219			
45	189	187	184	183	181	177	173	173	174	172	171	174	178	181	183	187			
50	158	156	154	153	151	147	143	143	144	142	141	144	148	150	152	156			
55	128	127	125	124	122	119	116	115	116	114	114	116	120	122	124	127			
60	101	99.9	98.3	97.4	96.1	93.1	90.3	89.5	90.6	89.0	88.7	90.9	93.8	95.6	97.3	99.9			
65	76.5	75.8	74.6	73.9	72.7	70.3	68.0	67.1	67.8	66.6	66.5	68.2	70.6	72.2	73.6	75.7			
70	54.8	54.5	53.7	53.0	52.0	50.1	48.3	47.4	48.0	47.1	47.1	48.4	50.3	51.7	52.9	54.5			
75	36.1	36.0	35.5	35.0	34.1	32.7	31.3	30.4	30.7	30.1	30.1	31.1	32.4	33.6	34.7	36.0			
80	20.5	20.6	20.3	19.8	19.1	18.2	17.2	16.4	16.3	15.9	16.0	16.6	17.4	18.5	19.4	20.3			
85	7.82	8.08	8.02	7.54	6.91	6.41	5.81	5.19	5.08	4.93	4.73	5.27	5.69	6.52	7.30	7.74			
90	0.04	0.05	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks: