
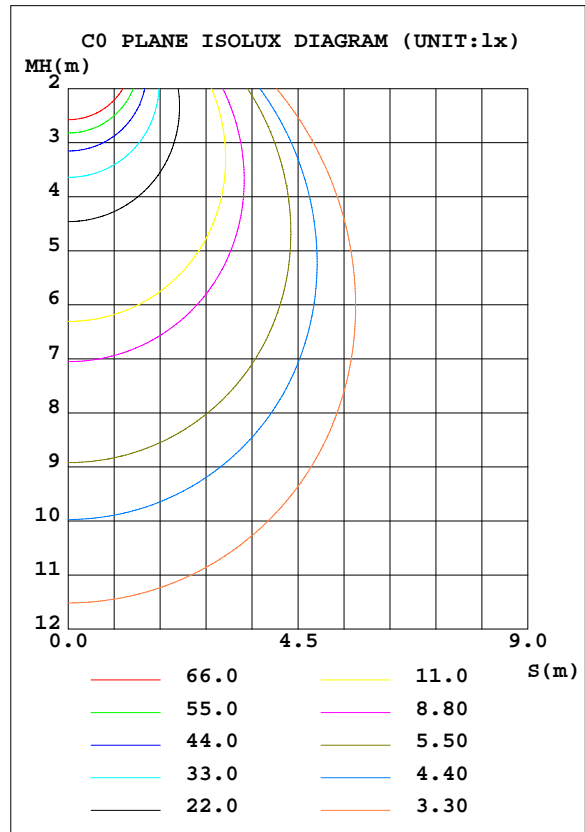


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.74 lm/W			
MODEL	LY61RCD 41K	I _{max} (cd)	437.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	0	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1214.5	η UP, DN(C0-180)	0.0,50.4
NOMINAL FLUX(lm)	1214.54	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	100.0	CIBSE SHR MAX	1.35

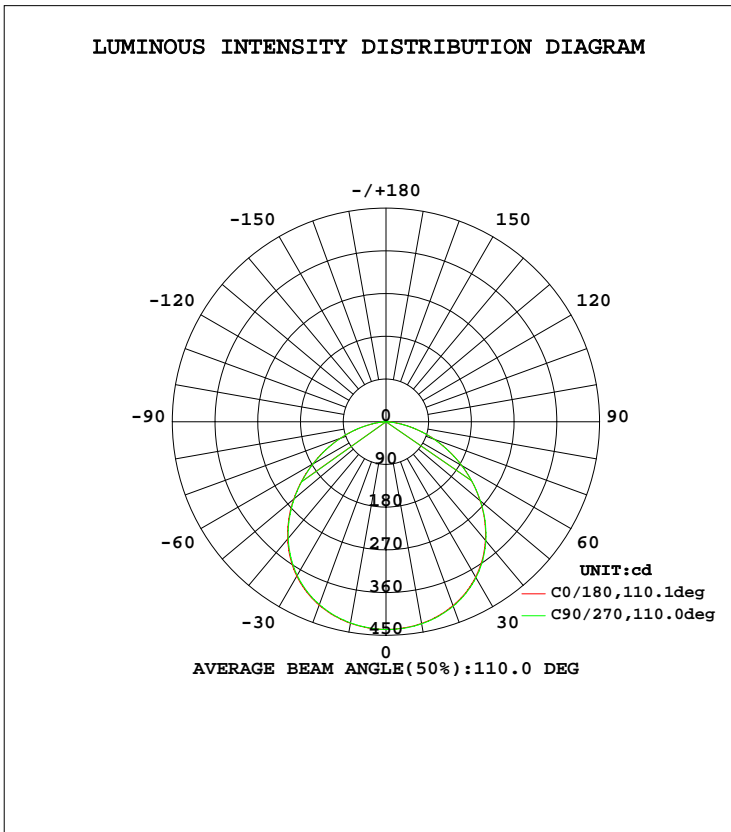


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

**ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES**

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum, lamp$
10	431.5	431.8	432.3	431.2	431.1	430.0	430.3	430.8	0- 10	41.45	41.45	3.41,3.41
20	412.3	413.6	413.7	412.0	411.3	409.6	410.0	411.1	10- 20	119.5	160.9	13.3,13.3
30	377.9	379.6	379.4	376.7	375.8	373.5	373.9	376.0	20- 30	182.6	343.5	28.3,28.3
40	325.9	327.9	327.3	323.9	322.3	319.7	320.4	323.5	30- 40	220.2	563.7	46.4,46.4
50	259.1	261.0	259.8	255.6	253.9	251.3	252.5	256.3	40- 50	224.6	788.4	64.9,64.9
60	184.1	185.7	184.0	180.0	178.1	175.9	177.3	181.3	50- 60	195.6	984.0	81,81
70	108.6	109.8	108.0	104.5	102.6	101.1	102.6	106.2	60- 70	141.3	1125	92.7,92.7
80	39.39	40.29	38.89	36.25	35.02	34.07	35.33	37.98	70- 80	74.07	1199	98.8,98.8
90	0.0422	0.0508	0.0343	0.0383	0	0	0	0	80- 90	15.14	1215	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0012	1215	100,100
110	0	0	0	0	0.0007	0.0012	0.0012	0.0009	100-110	0.0002	1215	100,100
120	0	0.0005	0.0006	0.0008	0.0013	0.0023	0.0021	0.0016	110-120	0.0008	1215	100,100
130	0.0007	0.0008	0.0007	0.0009	0.0010	0.0022	0.0013	0.0010	120-130	0.0011	1215	100,100
140	0.0012	0.0011	0.0000	0.0002	0	0.0022	0.0008	0	130-140	0.0007	1215	100,100
150	0.0005	0.0020	0	0	0	0.0013	0.0001	0	140-150	0.0002	1215	100,100
160	0	0.0026	0	0	0	0.0012	0.0009	0	150-160	0.0002	1215	100,100
170	0	0.0042	0.0027	0.0022	0.0002	0	0.0022	0	160-170	0.0003	1215	100,100
180	0	0	0	0	0	0	0	0	170-180	0.0002	1215	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

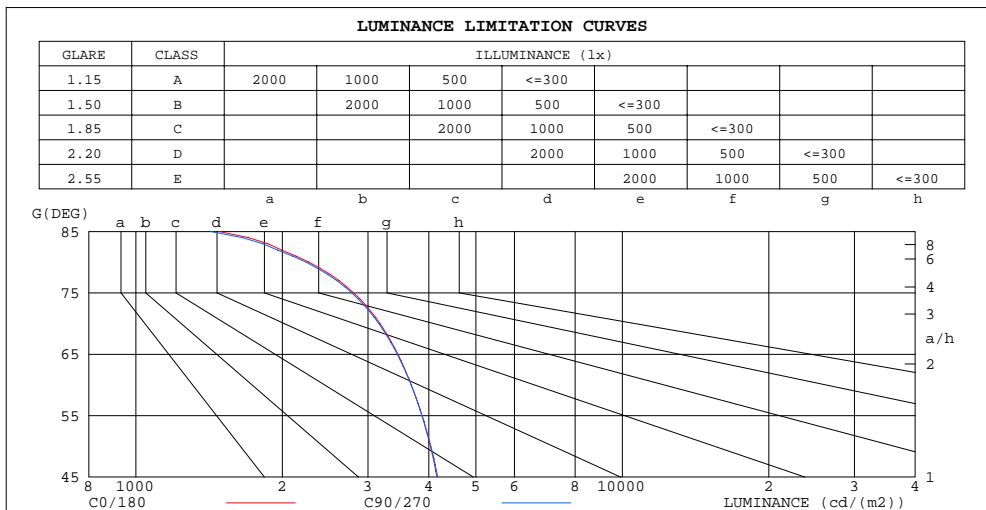


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.00	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.91	.89	.87	.85
2.0	.91	.85	.79	.90	.83	.78	.86	.81	.76	.83	.78	.75	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.68	.63	.71	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.55	.48	.63	.54	.48	.61	.53	.48	.59	.52	.47	.57	.51	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.55	.47	.42	.53	.46	.41	.51	.46	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

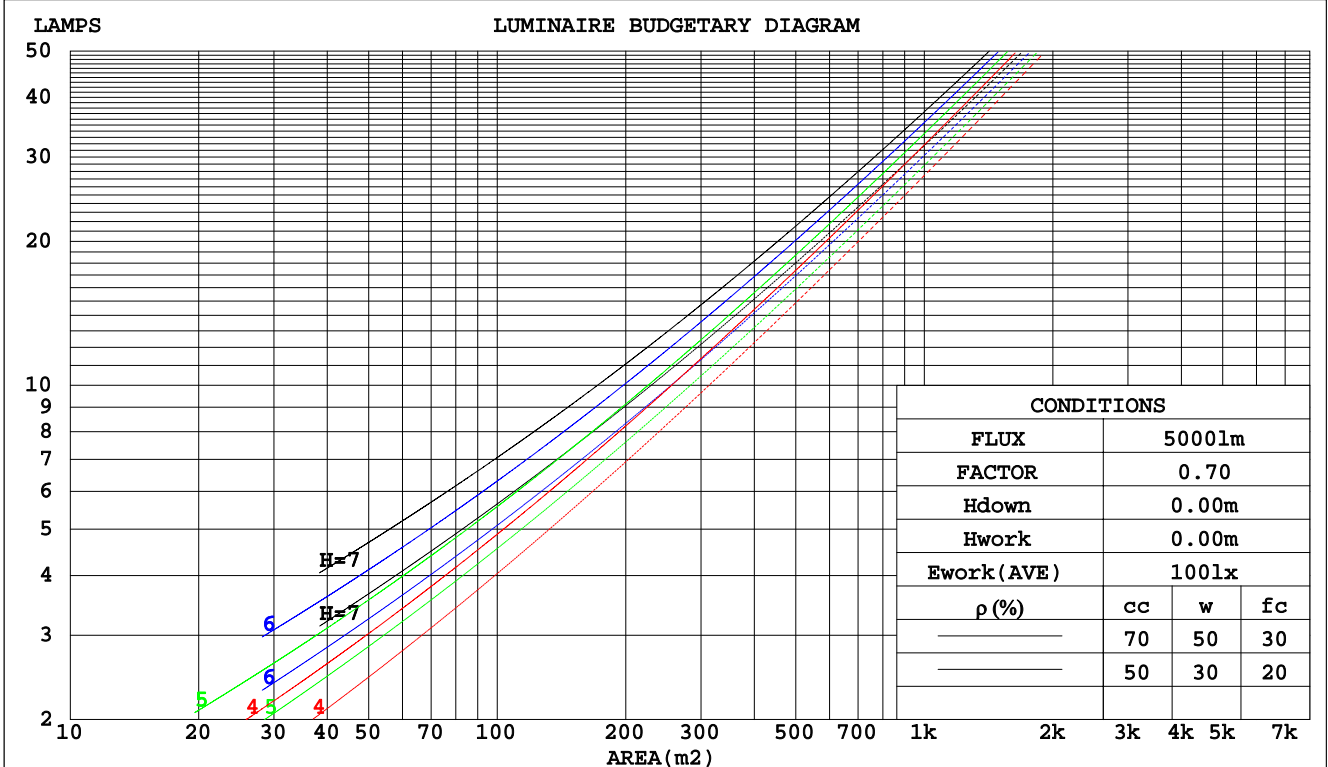

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.297	.169	.053	.290	.165	.052	.276	.159	.051	.264	.152	.049	.253	.147	.047	
2.0	.283	.155	.047	.276	.152	.047	.265	.147	.046	.254	.142	.045	.244	.138	.044	
3.0	.263	.140	.042	.258	.138	.042	.248	.134	.041	.238	.130	.040	.229	.127	.039	
4.0	.244	.127	.037	.239	.125	.037	.230	.122	.036	.222	.119	.036	.214	.116	.035	
5.0	.226	.115	.033	.222	.114	.033	.214	.111	.033	.207	.109	.032	.199	.107	.032	
6.0	.211	.106	.030	.207	.104	.030	.200	.102	.030	.193	.100	.029	.186	.098	.029	
7.0	.196	.097	.028	.193	.096	.027	.187	.094	.027	.180	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025	
9.0	.172	.083	.023	.170	.083	.023	.164	.081	.023	.160	.080	.023	.155	.079	.023	
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.135	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.146	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.055	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.148	.090	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.121	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.100	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	19.1	17.9	19.3	19.5	17.6	19.1	17.9	19.3	19.5
3H	19.0	20.4	19.3	20.6	20.8	19.0	20.4	19.3	20.6	20.8
4H	19.5	20.8	19.8	21.0	21.3	19.5	20.8	19.8	21.0	21.3
6H	19.8	21.0	20.1	21.3	21.6	19.8	21.0	20.1	21.3	21.5
8H	19.9	21.0	20.2	21.3	21.6	19.8	21.0	20.2	21.3	21.6
12H	19.9	21.0	20.2	21.3	21.6	19.8	21.0	20.2	21.3	21.6
4H 2H	18.2	19.5	18.5	19.8	20.0	18.2	19.5	18.5	19.8	20.0
3H	19.7	20.9	20.1	21.2	21.5	19.7	20.9	20.1	21.2	21.5
4H	20.3	21.4	20.7	21.7	22.0	20.3	21.4	20.7	21.7	22.0
6H	20.8	21.7	21.2	22.0	22.4	20.7	21.7	21.1	22.0	22.4
8H	20.9	21.7	21.3	22.1	22.5	20.8	21.7	21.3	22.1	22.5
12H	20.9	21.7	21.3	22.1	22.5	20.9	21.7	21.3	22.1	22.5
8H 4H	20.6	21.4	21.0	21.8	22.2	20.5	21.4	21.0	21.8	22.2
6H	21.1	21.8	21.5	22.2	22.6	21.1	21.8	21.5	22.2	22.6
8H	21.3	21.9	21.7	22.3	22.8	21.2	21.9	21.7	22.3	22.7
12H	21.4	21.9	21.8	22.3	22.8	21.3	21.9	21.8	22.3	22.8
12H 4H	20.6	21.3	21.0	21.7	22.1	20.5	21.3	21.0	21.7	22.1
6H	21.1	21.8	21.6	22.2	22.6	21.1	21.7	21.6	22.2	22.6
8H	21.3	21.9	21.8	22.3	22.8	21.3	21.8	21.8	22.3	22.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117 Corrected 1215 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.7)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	58	47	40	57	46	40	33
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	87	79	72	85	77	71	64
2.00	96	88	81	94	86	81	91	84	79	71
2.50	100	92	86	98	91	85	94	88	84	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Conical surface Flux(90deg):

677.69 lm
 %lum = 55.8%
 %lamp = 55.8%

Conical surface Flux(120deg):

983.98 lm
 %lum = 81.0%
 %lamp = 81.0%

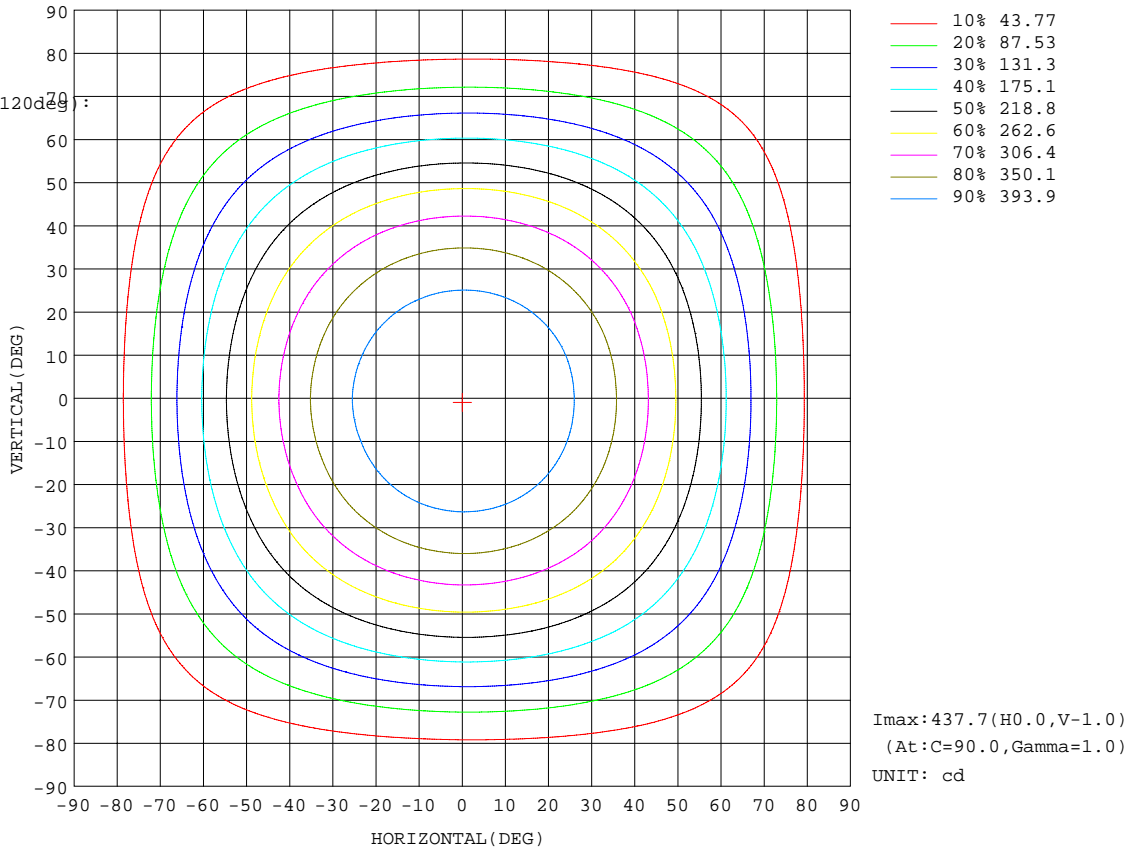


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

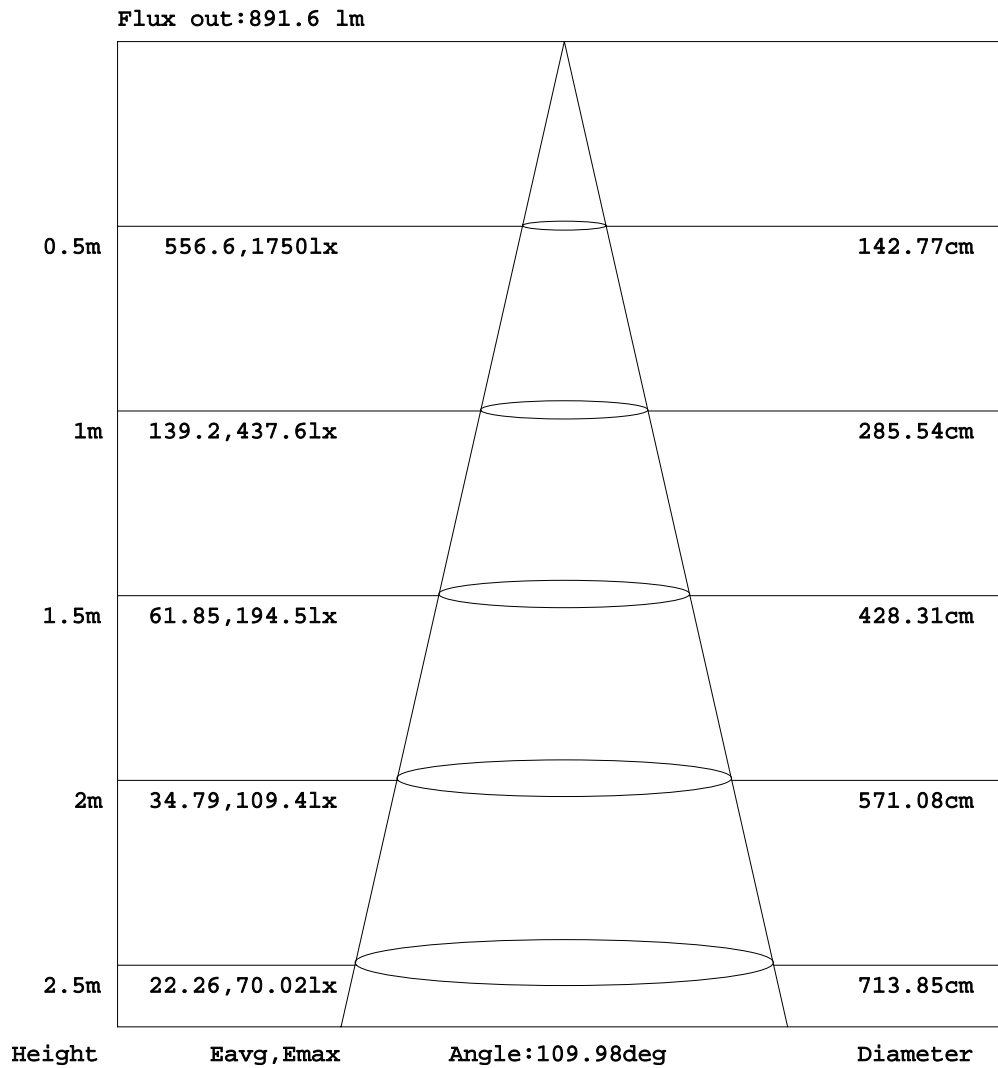


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

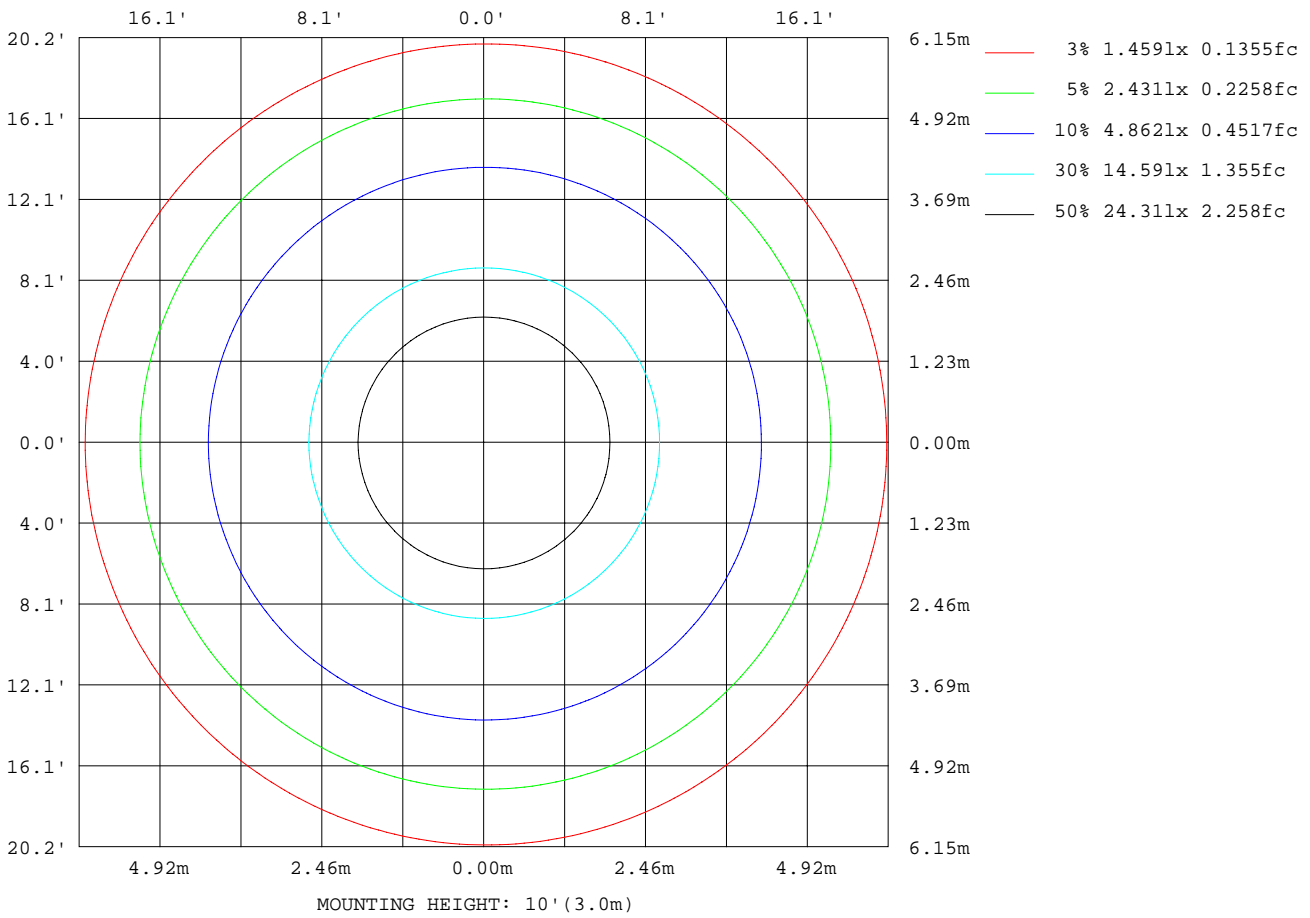

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: L/Y
 Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity: 65.0%
 Test Distance: 1.490m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180(65)av	3384
L_0~180(75)av	2701
L_0~180(85)av	1345
L_90~270(65)av	3374
L_90~270(75)av	2694
L_90~270(85)av	1297
L_45(65)av	3377
L_45(75)av	2696
L_45(85)av	1318

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks:

Planar Illuminance Curve

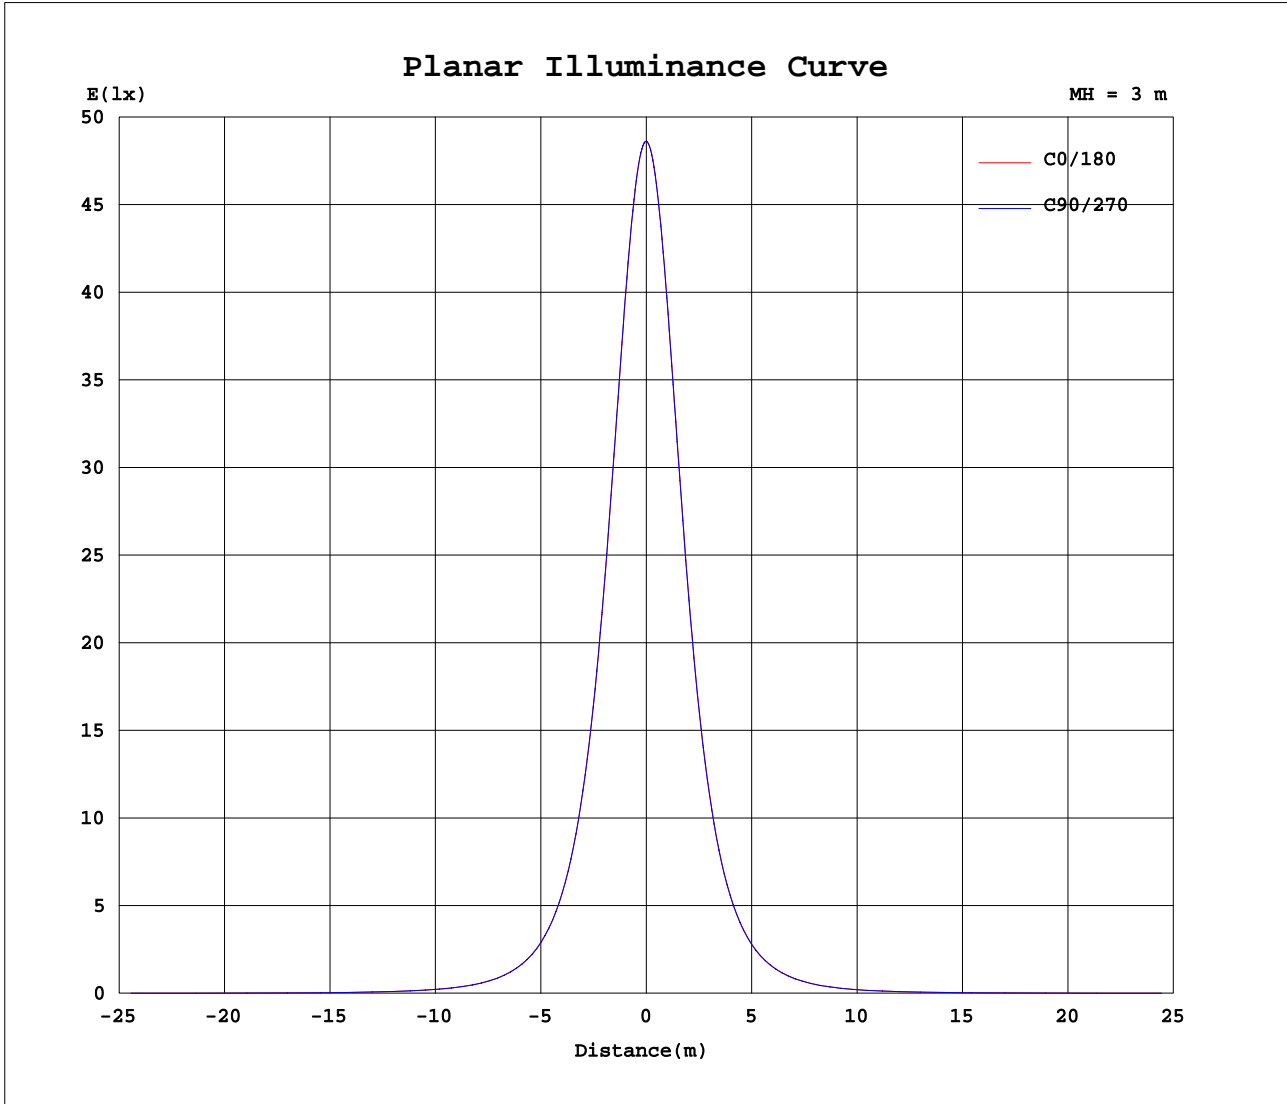

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: L/Y
Test Date: 2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.291
Humidity: 65.0%
Test Distance: 1.490m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1284A P:15.23W PF:0.9873 Lamp Flux:1214.54x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	438	437	437	437	438	437	437	437	438	437	437	437	438	437	437	437			
5	436	436	436	436	436	436	436	435	436	435	435	435	435	436	436	436			
10	432	432	432	432	432	432	431	431	431	430	430	430	430	431	431	431			
15	424	424	424	425	425	424	423	423	423	422	422	422	422	422	423	423			
20	412	413	414	414	414	413	412	411	411	410	410	410	410	411	411	412			
25	397	398	399	399	399	398	396	395	396	394	394	394	394	395	396	397			
30	378	379	380	380	379	378	377	375	376	374	373	373	374	375	376	378			
35	354	355	356	356	356	354	353	351	351	350	349	349	349	350	352	354			
40	326	327	328	328	327	326	324	322	322	321	320	320	320	322	323	326			
45	294	295	296	296	295	293	291	289	290	288	287	287	288	289	291	294			
50	259	260	261	261	260	258	256	254	254	252	251	252	252	254	256	259			
55	222	223	224	224	222	220	218	216	216	215	214	214	215	217	219	222			
60	184	185	186	185	184	182	180	178	178	177	176	176	177	179	181	184			
65	146	147	147	147	146	144	142	140	140	139	138	138	140	141	143	146			
70	109	110	110	109	108	106	104	103	103	101	101	102	103	104	106	108			
75	72.5	73.4	73.6	73.1	72.0	70.4	68.7	67.2	67.3	66.4	66.1	66.5	67.5	69.0	70.6	72.4			
80	39.4	40.1	40.3	39.8	38.9	37.6	36.3	35.0	35.0	34.3	34.1	34.5	35.3	36.5	38.0	39.4			
85	12.9	13.4	13.4	13.0	12.4	11.6	10.8	10.0	10.5	10.1	9.89	10.3	10.2	11.0	11.9	12.8			
90	0.04	0.05	0.05	0.05	0.03	0.04	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:L/Y
 Test Date:2016-03-11

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.291
 Humidity:65.0%
 Test Distance:1.490m [K=1.0000]
 Remarks: