



# LB4S-24V

## 4" Square 24V DC Super Thin Recessed LED 13W



**Type IC, Wet & Air-Tight**

### DESCRIPTION

4" Square 24V DC Input Recessed LED  
Fits Where No Other Recessed Fixture Can

### FEATURES & BENEFITS



1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility  
No driver included - connect direct to 24V DC  
Dimmable when connected to dimmable drivers  
Connect up to 6 fixtures per a 96W power supply

### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required For Driver: 2 1/2"

### DIMENSIONS: ID 4 1/8" OD 4 3/4"

Cut Out Round 4 1/8" to 4 1/4"

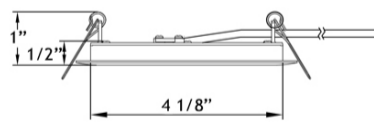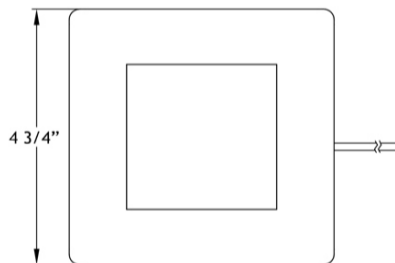

### AVAILABLE TRIMS



White

### ORDERING GUIDE

**LB4S-24V-30K-WH**

In stock only 3000K White Trim  
Other CCT and trim colors available as custom order

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

SPECIFICATION	
Applications	Low Voltage Recessed
Energy Used	13 W
Colour Temperature	3000
Light Output	750
Halogen Equivalent	90 W
Beam Angle	110°
CRI	80
Input	24V DC
Dimmability	Constant Voltage Dimmable
Approved Location	Insulated Ceiling, Wet & Damp Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	25,000 Hours
Certification	cULus
Warranty	3 Year

### ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP4-2](#)



[26" Flat Rough-In Plates model # RIP4](#)



[Flanged Plate with Hanger Bars model # FRP4](#)

### COMPLIANCE



**Type IC  
Air-Tight  
Wet Location**

### Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

mailing addresses  
warehouses

### Lotus LED Lights CANADA

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090  
Delta BC & Mississauga ON