



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION


4" Round Deep Regressed LED
 3/8" Trim for High-End Contemporary Installations
 Commercial Grade Quality Built To Last

FEATURES & BENEFITS

5 single CCT, Dim to Warm, & 5CCT field selectable options
 3 1/2" Deep - Install Where Ceiling Space Is Limited
 Armored Cable & Metal Connectors - Open Plenum Rated
 Driver Inside Connection Box with Romex Quick Connectors
 and Knock Outs - Fast Installation & No Junction Box Needed
 Type IC, Air-Tight & Wet Location - No Housing Required

DIMENSIONS ID 3 3/4" OD 4 1/8"

Ceiling Clearance Required: 3 1/2" Cut Out 3 3/4"

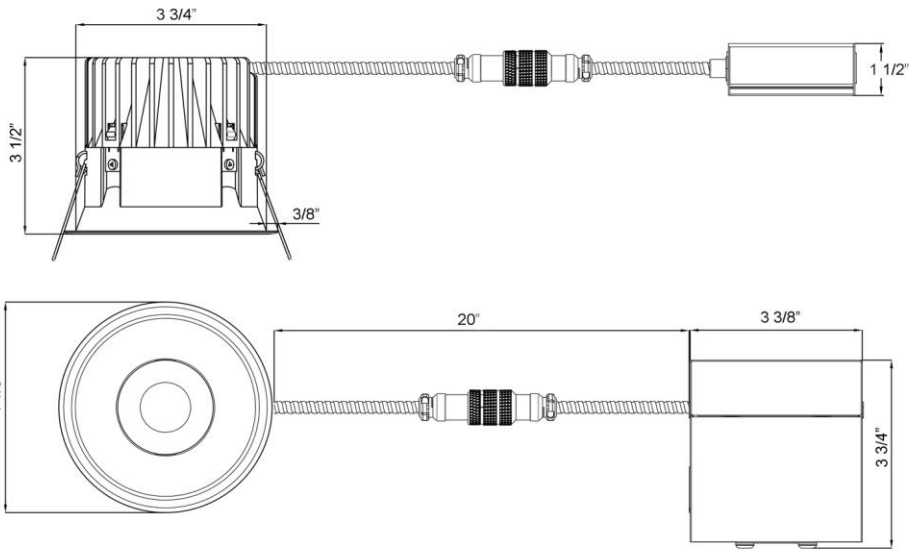

ORDERING GUIDE Example **LD4R-30K-4R-WR-TT**

LD4R	CCT	Reflector - Trim	Beam Angle
	- xxK	- 4R-xR-TT	
2700K	27K	- 4R-WR-TT	ank for 30°
3000K	30K	- 4R-SR-TT	-15D 15°
3500K	35K	- 4R-BR-TT	-60D 60°
4000K	40K		
5000K	50K		
DTW 30-20K	32K	Dim To Warm 3000K to 2000K	
DTW 30-18K	3018K	Dim To Warm 3000K to 1800K	
5CCT	5CCT	User selectable 27-30-35-40-50K	



LD4R-TT

4" Thin Trim Round Deep Regressed LED 15W

Project: _____
 Location: _____
 Model #: _____ Qty: _____
 Notes: _____

SPECIFICATION	
Applications	Recessed Ceiling Mount Thin Trim
Energy Used	15W
Color Temperature (K)	2700 3000 3500 4000 5000 DTW 30-20K DTW 30-18K
Light Output (lm)	1100 1200 1250 1300 1400 900 980
Beam Angle	30° (default), 15° & 60° optional
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.98
Approved Location	Insulated Ceilings, Open Plenum, Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW & 5CCT), T24
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White Reflector
 White Trim
4R-WR-TT

Silver Reflector
 White Trim
4R-SR-TT

Black Reflector
 Black Trim
4R-BR-TT

120V TRIAC Dimmable Driver Included Optional 120V-347V
 0-10V Dimmable
 Order Separately as
[model # LLL-LD1535TR](#)



ACCESSORIES

Sold Separately



[26" Long Flat Rough-In Plate model # RIP334](#)



[Armored Low Voltage Extension 10ft model # MEC10](#)

COMPLIANCE



Type IC & Air-Tight
Wet Location
Open Plenum

Lotus LED Lights USA
 250 H Street # 301, Blaine WA 98230 tel 360-200-5500
 Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com
 mailing addresses
 warehouses

Lotus LED Lights CANADA
 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
 Delta BC & Mississauga ON