



Type IC, Air-Tight, Wet & Plenum Rated

DESCRIPTION

4" Square Recessed LED With Integral Driver In Connection Box
Commercial Grade Quality With Architectural Design


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
Single CCT 2700K, 3000K, 4000K, Dim to Warm or 5CCT options
CRI 90+ for True Color Rendering
Type IC Rated - No Housing Required - Save on Labour
Driver Inside Connection Box - No Junction Box Needed
Armored Cable & Metal Connectors - Open Plenum Rated

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 2"

DIMENSIONS: ID 4" OD 5" Sq Cut Out 4" to 4 1/4"

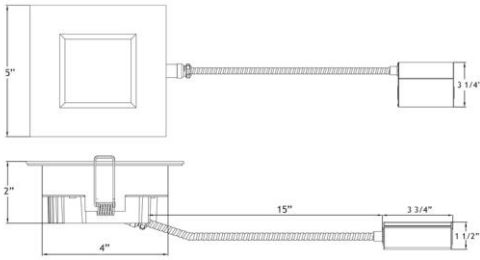

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as [model # LLL-LD1535TR](#)

ORDERING GUIDE Example: **LL4SR - 30K - WH**

| | CCT | Trim Finish | |
|--------------|--------------|---------------------------------|-----------------------|
| LL4SR | - xxK | - xx | |
| 2700K | 27K | WH | White |
| 3000K | 30K | BK | Black |
| 4000K | 40K | | |
| DTW 30K-18K | 3018K | Dim to Warm 3000K to 1800K | |
| 5CCT | 5CCT | User Selectable 27-30-35-40-50K | |

LL4SR

4" Square Regressed Open Plenum LED 14.5W

Project:

Location:

Model #:

Qty:

Notes:

| SPECIFICATION | |
|------------------------------|---|
| Applications | Recessed Ceiling Mount |
| Power | 14.5 W |
| Single CCT Models (K) | 2700 3000 4000 Dim to Warm 3000-1800K |
| Light Output White Trim (lm) | 850 900 950 780 |
| 5 CCT Models (K) | 2700 3000 3500 4000 5000 |
| Light Output White Trim (lm) | 800 840 890 920 890 |
| Halogen Equivalent | 90 W |
| Beam Angle | 90° |
| CRI | 90 + |
| Default Driver Input | 120V AC Triac Dimmable |
| Optional Driver Input | 120V-347V AC 0-10V Dimmable |
| Junction Box Wire Capacity | Max 5 No 12 AWG or 8 No 14 AWG |
| Power Factor | 0.98 |
| Approved Location | Insulated Ceilings, Open Plenum, Wet |
| IP Rating | IP 54 |
| Air Tight | Yes |
| Ambient Temperature | -40°F (-40°C) to +104°F (+40°C) |
| Projected Life | 70% Light Output at 50,000 Hours |
| Certification | cULus, Energy Star (except DTW & 5CCT) |
| Warranty | 10 Year Residential / 5 Year Commercial |

AVAILABLE TRIMS



ACCESSORIES

Sold Separately



Armored Low Voltage Extension FT6 / CMP rated [10ft model # MEC10](#)



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Flat Rough-In Plates model # RIP4](#)



[Flanged Plate with Hanger Bars model # FRP4](#)

COMPLIANCE



**Type IC
Air-Tight
Open Plenum**

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON