



# LRG3-4CCT+DTW-HO

## 3" Round Regressed Gimbal LED 4CCT + Dim to Warm 11W



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### DESCRIPTION

3" Round Regressed Gimbal LED  
 With Integral Driver In Connection Box  
 Gimbal Yet Air-Tight Without Housing Needed  
**4CCT + Dim to Warm User Selectable**


### FEATURES & BENEFITS

3 1/2" Deep - Install Where Ceiling Space Is Limited  
 Type IC Rated - No Housing Required  
 Air-Tight & Wet Location rated  
**4CCT** user selectable 2200-2700-3000-4000  
 5th position is **Dim to Warm 3500K to 2700K**  
 CRI 90+ for True Color Rendering  
 Driver Inside Connection Box - No Junction Box Needed

### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening  
 With Attached Spring Clips  
 Ceiling Clearance Required: 3 1/2"

**DIMENSIONS:** ID 3 1/4" OD 4 1/4" Cut Out 3 1/4" to 3 1/2"

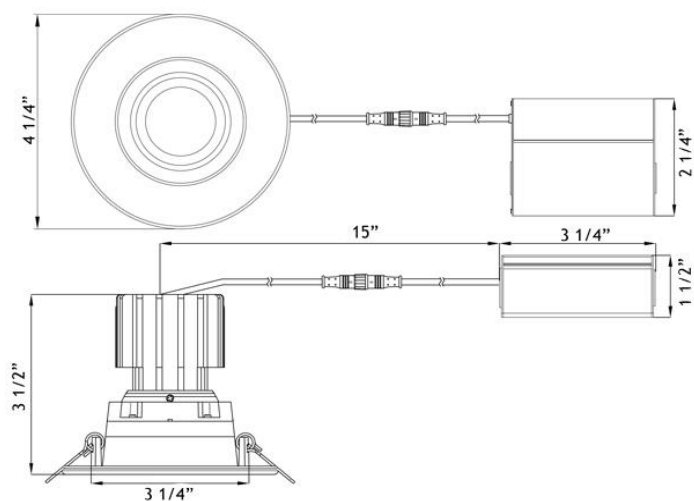

### ORDERING GUIDE

**LRG3-4CCT+DTW-HO** [White Trim](#)

In stock white trim  
 Other trims available by custom order, MOQ 100 pieces

SPECIFICATION	
Applications	Sloped Ceilings up to 20°, General Lighting
Power	11 W
Color Temperature	2200   2700   3000   4000   Dim to Warm 3500 to 2700K
Light Output	930   945   950   960   955
Halogen Equivalent	90 W
Beam Angle	38° Beam with 20° tilt and 360° rotation
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

120V TRIAC Dimmable  
 Driver Included

Optional 120V-347V  
 Driver 0-10V Dimmable  
 Order Separately as  
[model # LLL-LD1025T3](#)



### ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed  
[6ft - model # EXC6](#)  
[20ft - model # EXC20](#)



[Flat Rough-In Plates - model # RIP312](#)



[Flanged Plate with Hanger Bars model # FRP312](#)

### COMPLIANCE



**Type IC**  
**Air-Tight**  
**Wet Location**

**Lotus LED Lights USA**  
 250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
 Hainesport NJ, Naples FL, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)  
 mailing addresses  
 warehouses

**Lotus LED Lights CANADA**  
 1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090  
 Delta BC & Mississauga ON