



Type IC, Damp & Air-Tight

DESCRIPTION

6" Round Recessed LED With Integral Driver In Connection Box


FEATURES & BENEFITS

- 1" Deep - Install Where Ceiling Space Is Limited
- Driver Inside Connection Box - No Junction Box Needed
- Fast & Easy To Install - Save On Labor
- Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 1 1/2"

DIMENSIONS: ID 6" OD 7" Cut Out 6" to 6 1/2"

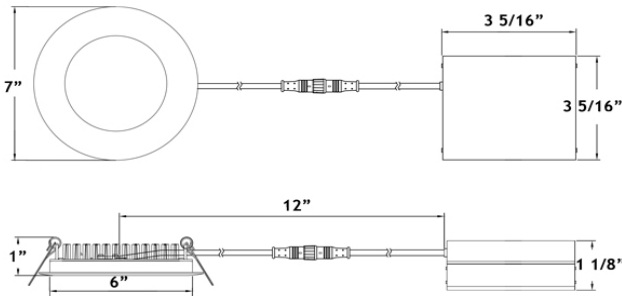

120V TRIAC Dimmable Optional 120V - 347V
Driver Included Driver 0-10V Dimmable



AVAILABLE TRIMS



ORDERING GUIDE Example: **LY61RCD / 30K / WH**

	CCT	Trim Finish	
LY61RCD	/	/	
3000K	30K	WH	White
4100K	41K	BN	Brushed Nickel


Project: _____
 Location: _____
 Cat #: _____ Qty: _____
 Notes: _____

SPECIFICATION


Applications	Recessed Ceiling	
Energy Used	15 W	
Colour Temperature	3000	4100
Light Output	850	900
Halogen Equivalent	75 W	
Beam Angle	110°	
CRI	80	
Default Driver Input	120V AC	Triac Dimmable
Optional Driver Input	120V-347V AC	0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG	
Power Factor	0.95	
Approved Location	Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cULus	
Warranty	10 Year Residential / 5 Year Commercial	

ACCESSORIES


Sold Separately




Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated




26" Flat Rough-In Plates - cat # **RIP6**



13" Flat Rough-In Plate - cat # **MP6-2**



Flanged Plate with Hanger Bars - cat # **FRP6**



Goof Ring White OD 7 5/8" cat # **GR6**

COMPLIANCE



**Type IC
Air-Tight**